

fit a given width and length of the cabinet. The top 1401 includes a duct 1402 which serves as an exit conduit for exhaust gases. Three groups of four holes 1403, 1404 and 1405 for distribution manifold outlet lines are included in the top. It is contemplated that the outlet lines (e.g., stainless steel tubing) connect to the distribution manifold and are guided through an appropriate hole, then connect to a process tool or the like. Similarly, the holes may be fitted with fittings (such as male VCR fittings) so that the outlet lines connect to the fittings and then additional lines to the process tool or the like connect to the male fitting on the exterior side of the top. If distribution manifolds are omitted, as in FIG. 12a, then less holes need be bored in the top or, if a top is used which already has multiple holes drilled as in the configuration depicted in FIG. 14, the holes may be capped to close the opening. The top may also include other holes or fittings such as an inlet for a bulk chemical canister 1405, for inert gas source 1406, for Venturi vacuum 1407, 1408 and 1409, for electrical inlets 1410, for air inlet 1411. In this upper view of the top 1401, there are also shown option items such as removable wheels 1412, and the wheels may also be on the left side of the top. The wheels would attach to the base but are shown here from this perspective view. Hinges 1413 serve to attach a section 1414 so that an operator can access the inside of the cabinet from the top. In this embodiment, a circuit breaker 1415 is also depicted, which would connect to internal electrical instrumentation.

FIG. 14a shows the front 1420 of the cabinet. The placement of wheels 1412 are readily seen in this view as being attached to the lower section of the cabinet. The width "W" of the cabinet will vary based on the size and number of canisters in the cabinet. For instance, in one embodiment, the cabinet is wide enough to house three canisters. In another embodiment, the cabinet is wide enough to house four canisters. In FIG. 14a, the duct 1402 protrudes from the top. Two doors 1421a, 1421b form part of the front. The doors may be on spring loaded hinges for ease of entry. Handles 1422a, 1422b are included on the doors, as are vents 1423a, 1423b. A touch screen 1424 provides a means for inputting instructions for the control instrumentation (not shown). A small window 1425 allows an operator to observe the inside of the cabinet without opening the doors 1421a, 1421b. The front 1420 includes an upper area 1426 and a lower area 1427. The upper area 1426 provides additional space for manifolds, instrumentation and the like that may be included in the cabinet. The lower area

## PATENT COOPERATION TREATY

PCT

## NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

Assistant Commissioner for Patents  
United States Patent and Trademark  
Office  
Box PCT  
Washington, D.C.20231  
ÉTATS-UNIS D'AMÉRIQUE

in its capacity as elected Office

<b>Date of mailing</b> (day/month/year) 10 March 2000 (10.03.00)	
<b>International application No.</b> PCT/US99/14845	<b>Applicant's or agent's file reference</b> ADCS:013
<b>International filing date</b> (day/month/year) 30 June 1999 (30.06.99)	<b>Priority date</b> (day/month/year) 30 June 1998 (30.06.98)
<b>Applicant</b> NOAH, Craig, M. et al	

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International Preliminary Examining Authority on:

28 January 2000 (28.01.00)

☐ in a notice effecting later election filed with the International Bureau on:2. The election ☒ was☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO  
34, chemin des Colombettes  
1211 Geneva 20, Switzerland

Facsimile No.: (41-22) 740.14.35

Authorized officer

Juan Cruz

Telephone No.: (41-22) 338.83.38

# PATENT COOPERATION TREATY

From the INTERNATIONAL SEARCHING AUTHORITY

## PCT

To:

JONES O'KEEFE & EGAN LLP  
1101 Capital of Texas Highway South  
Building C, Suite 200  
Austin, TX 78746  
UNITED STATES OF AMERICA

### NOTIFICATION OF DECISION CONCERNING REQUEST FOR RECTIFICATION

(PCT Rule 91.1(f))

<p>Applicant's or agent's file reference</p> <p><b>ADCS:013</b></p>	<p>Date of mailing (day/month/year) <b>24/03/2000</b></p>
<p>International application N°.</p> <p><b>PCT/US 99/ 14845</b></p>	<p>International filing date (day/month/year) <b>30/06/1999</b></p>
<p>Applicant</p> <p><b>NOAH, Craig, M. et al.</b></p>	

The applicant is hereby notified that this International Searching Authority has considered the request for rectification of obvious errors in the international application/in other papers submitted by the applicant to this Authority, and that it has decided:

1. ☒ to authorize the rectification:
 

☒ as requested by the applicant.  
☐ to the extent set forth below\*:
  
2. ☐ to refuse to authorize the rectification or part of it for the following reasons\*:

A copy of this notification, together with a copy of the applicant's request for rectification, has been sent to the receiving Office and to the International Bureau.

\* **If the authorization of the rectification has been refused in whole or in part**, the applicant may request the International Bureau, before the technical preparations for international publication have been completed and subject to the payment of a fee, to publish the request for rectification together with the international application. See Rule 91.1(f), third and fourth sentences, and, for the amount of the fee, see the PCT Applicant's Guide, Volume I/A, Annex B2(1B).

<p>Name and mailing address of the International Searching Authority</p> <div style="display: flex; align-items: center;"> <div> <p>European Patent Office, P.B. 5818 Patentlaan 2 NL-2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016</p> </div> </div>	<p>Authorized officer</p> <p><b>Trudy Thoen-de Jong</b></p>
--	---

## PATENT COOPERATION TREATY

REC'D 18 AUG 2000

## PCT

WIPO PCT

INTERNATIONAL PRELIMINARY EXAMINATION REPORT 16

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference 17414	<b>FOR FURTHER ACTION</b> See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. PCT/US99/14845	International filing date (day/month/year) 30/06/1999	Priority date (day/month/year) 30/06/1998
International Patent Classification (IPC) or national classification and IPC F17C13/04		
Applicant NOAH, Craig, M. et al.		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.



2. This REPORT consists of a total of 6 sheets, including this cover sheet.

- ☒ This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of 6 sheets.

3. This report contains indications relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☒ Certain documents cited
- VII ☒ Certain defects in the international application
- VIII ☒ Certain observations on the international application

Date of submission of the demand 28/01/2000	Date of completion of this report 16.08.2000
Name and mailing address of the international preliminary examining authority:  European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465	Authorized officer Foulger, M Telephone No. +49 89 2399 2960 

# INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/US99/14845

## I. Basis of the report

1. This report has been drawn on the basis of (*substitute sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to the report since they do not contain amendments.*):

### Description, pages:

1-19 as originally filed

### Claims, No.:

1-24 as received on 28/06/2000 with letter of 28/06/2000

### Drawings, sheets:

1/22-22/22 as originally filed

2. The amendments have resulted in the cancellation of:

- ☐ the description, pages:
- ☐ the claims, Nos.:
- ☐ the drawings, sheets:

3. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

4. Additional observations, if necessary:

# INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/US99/14845

## V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

### 1. Statement

Novelty (N)	Yes:	Claims	1-24
	No:	Claims	
Inventive step (IS)	Yes:	Claims	1-24
	No:	Claims	
Industrial applicability (IA)	Yes:	Claims	1-24
	No:	Claims	

### 2. Citations and explanations

**see separate sheet**

## VI. Certain documents cited

### 1. Certain published documents (Rule 70.10)

and / or

### 2. Non-written disclosures (Rule 70.9)

**see separate sheet**

## VII. Certain defects in the international application

The following defects in the form or contents of the international application have been noted:

**see separate sheet**

## VIII. Certain observations on the international application

The following observations on the clarity of the claims, description, and drawings or on the question whether the claims are fully supported by the description, are made:

**see separate sheet**

**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT - SEPARATE SHEET**

---

International application No. PCT/US99/14845

Reference is made to the following documents:

- D2: WO 95 20127 A (ADVANCED DELIVERY & CHEMICAL S) 27 July 1995  
(1995-07-27) cited in the application  
D3: US 5620524 A (FAN)

**Re Item V**

**Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement**

**1. Claim 1**

**1.1 Closest Prior Art**

The nearest prior art is considered to be D3 which shows a system for delivering multiple liquid chemicals to a process tool, comprising:

- a first process canister for containing the first liquid chemical wherein the first process canister supplies the first liquid chemical to the process tool
- a second process canister for containing the second liquid chemical wherein the second process canister supplies the second liquid chemical to the process tool (**see fig. 2**).

D3 does not show a refill system for the process canisters.

**1.2 Problem To Be Solved**

The problem to be solved may therefore be regarded as how to provide an improved system which has a smaller "footprint" than known systems and also provides a reliable refill for the process canisters.

**1.3 Solution**

The problem is solved by providing refill canisters and associated manifolds as described in claim 1 and housing all the components in a single cabinet.

**INTERNATIONAL PRELIMINARY  
EXAMINATION REPORT - SEPARATE SHEET**

---

International application No. PCT/US99/14845

Although D2 discloses a system for delivering a liquid chemical to a process tool with such a refill system, in the system according to D2 the refill canister is described as being remote from the process canister, see e.g. p10, lines 15-16. A combination of D2 and D3 would not therefore lead to the subject-matter of claim 1 without further modification.

This solution is therefore not known nor rendered obvious by the available prior art, and is thus new and inventive.

**2. Claims 10 and 17**

Claim 10 concerns a method for manufacturing a system for delivery of multiple different liquid chemicals and claim 17 concerns a method for supplying multiple chemicals to a process tool.

These method claims contain the corresponding method features to the system features of claim 1 and thus are also new and inventive.

**3. Claims 2-9,11-16 and 18-24**

Claims 2-9 concern further preferred embodiments of the system according to claim 1. Claims 11-16 and 18-24 concern further embodiments of the methods according to claims 10 and 17 respectively.

**Re Item VI**

**Certain documents cited**

**Certain published documents (Rule 70.10)**

Application No Patent No	Publication date (day/month/year)	Filing date (day/month/year)	Priority date (valid claim) (day/month/year)
PCT/US98/14373	21.1.99	10.7.98	11.7.97



**Re Item VII**

**Certain defects in the international application**

- a. Contrary to the requirements of Rule 5.1(a)(ii) PCT, the relevant background art disclosed in the document D3 is not mentioned in the description, nor is this document identified therein.
- b. Independent claims are not in the two-part form in accordance with Rule 6.3(b) PCT, which in the present case would be appropriate, with those features known in combination from the prior art (document D3) being placed in a preamble (Rule 6.3(b)(i) PCT) and with the remaining features being included in a characterising part (Rule 6.3(b)(ii) PCT).
- c. The features of the claims are not provided with reference signs placed in parentheses (Rule 6.2(b) PCT).
- d. The units of pressure "psig" on page 8 are not additionally expressed in terms of the units stipulated by Rule 10.1(a) PCT.

**Re Item VIII**

**Certain observations on the international application**

- e. The application does not meet the requirements of Article 6 PCT EPC, because claim 1 is not clear.

Claim 1 concerns a system which is then defined in terms of the chemical to be used within the system. Claim 1 therefore attempts to define the invention through features which relate to the use of the system. As the system of claim 1 without the associated chemicals is not defined, then claim 1 is not clear, see Guidelines C-III, 4.8a. For the purposes of this report claim 1 has been understood as a system suitable for containing the respective chemicals.

**WHAT IS CLAIMED IS:**

1. A system for delivering multiple different chemicals to a process tool, comprising:

5 a first refill canister and a first process canister that are connected to a first manifold that connects to at least one first process line wherein the first refill canister refills a first chemical to the first process canister through the first manifold and wherein the first process canister supplies the first chemical to the process tool;

10 a second refill canister and a second process canister that are connected to a second manifold that connects to at least one second process line wherein the second refill canister refills a second chemical to the second process canister through the second manifold and wherein the second process canister supplies the second chemical to the process tool;

wherein the first refill canister, the first process canister, the second refill canister, the second process canister and the first and second manifolds are housed in a cabinet.

15 2. The system of claim 1 further comprising: a third refill canister and a third process canister are connected to a third manifold that connects to at least one third process line wherein the third refill canister refills the third process canister through the third manifold and wherein the third refill canister and the third process canister and third manifold  
20 are housed in the cabinet.

3. The system of claim 2 further comprising a fourth refill canister and a fourth process canister are connected to a fourth manifold that connects to at least one fourth process line wherein the fourth refill canister refills the fourth process canister through the fourth  
25 manifold and wherein the fourth refill canister and the fourth process canister and fourth manifold are housed in the cabinet.

4. The system of claim 1 wherein the cabinet houses a total of six or eight canisters.

REPLACED BY  
ART 34 AMDT

5. The system of claim 1 wherein at least one of the manifolds comprises: a vacuum supply valve; a vacuum generator; a pressure vent valve; a gas inlet valve; a bypass valve; an isolation valve; a control valve; a canister inlet valve; a canister outlet valve; and a canister inlet coupler; wherein the vacuum supply valve is connected to the vacuum generator; wherein the vacuum generator is connected to the pressure vent valve and the control valve; wherein the gas inlet valve is connected to pressure vent valve and bypass valve; wherein the bypass valve is further connected to isolation valve and the canister inlet valve; wherein the isolation valve is also connected to canister outlet valve; wherein canister inlet valve is connected to control valve, and canister outlet valve.

10

6. The system of claim 1 wherein at least one manifold of the system comprises: a vacuum supply valve connected to a vacuum generator; a pressure vent valve connected to the vacuum generator and to a gas inlet valve; a control valve connected to vacuum generator; wherein the gas inlet valve is also connected to a bypass valve, an isolation valve connected to a canister outlet valve and to the bypass valve, and a canister inlet valve connected to the bypass valve, the control valve, and a canister outlet valve.

15

7. The system of claim 1 wherein the first refill canister contains tetraethylorthosilicate; wherein the second refill canister contains triethylphosphate or triethylphosphite; and wherein the third refill canister contains triethylborate.

20

8. The system of claim 1 wherein the cabinet is composed of two sides, a back, a top, a base and a front having at least one door, wherein the base optionally has wheels attached, wherein at least one of the at least one door has a touch screen.

25

9. The system of claim 8 wherein the cabinet includes an angled containment floor that directs chemical to a drain pan.

10. A method for manufacturing a system for delivery of multiple different chemicals, comprising:

30

REPLACED BY  
ART 34 AMDT

connecting a first refill canister and a first process canister to a first manifold that connects to at least one first process line wherein the first refill canister refills a first chemical to the first process canister through the first manifold and wherein the first process canister supplies the first chemical to the process tool;

5 connecting a second refill canister and a second process canister to a second manifold that connects to at least one second process line wherein the second refill canister refills a second chemical to the second process canister through the second manifold and wherein the second process canister supplies the second chemical to the process tool;

10 connecting a third refill canister and a third process canister to a third manifold that connects to at least one third process line wherein the third refill canister refills a third chemical to the third process canister through the third manifold and wherein the third process canister supplies the third chemical to the process tool; and

15 housing the first refill canister, the first process canister, the second refill canister, the second process canister, the third refill canister, the third process canister, and the first, second and third manifolds in a cabinet.

11. The method of claim 10 further comprising connecting a fourth refill canister and a fourth process canister to a fourth manifold that connects to at least one fourth process line wherein the fourth refill canister refills the fourth process canister through the fourth manifold and wherein the fourth refill canister and the fourth process canister and fourth manifold are housed in the cabinet.

12. The method of claim 10 wherein at least one of the manifolds comprises: a vacuum supply valve; a vacuum generator; a pressure vent valve; a gas inlet valve; a bypass valve; an isolation valve; a control valve; a canister inlet valve; a canister outlet valve; and a canister inlet coupler; wherein the vacuum supply valve is connected to the vacuum generator; wherein the vacuum generator is connected to the pressure vent valve and the control valve; wherein the gas inlet valve is connected to pressure vent valve and bypass valve; wherein the bypass valve is further connected to isolation valve and the canister inlet valve; wherein the isolation valve is also connected to canister outlet valve; wherein canister inlet valve is connected to control valve, and canister outlet valve.

13. The method of claim 10 wherein at least one manifold of the system comprises: a vacuum supply valve connected to a vacuum generator; a pressure vent valve connected to the vacuum generator and to a gas inlet valve; a control valve connected to vacuum generator; wherein the gas inlet valve is also connected to a bypass valve, an isolation valve connected to a canister outlet valve and to the bypass valve, and a canister inlet valve connected to the bypass valve, the control valve, and a canister outlet valve.

14. The method of claim 10 wherein the first refill canister contains tetraethylorthosilicate; wherein the second refill canister contains triethylphosphate or triethylphosphite; and wherein the third refill canister contains triethylborate.

15. The method of claim 10 wherein the cabinet is composed of two sides, a back, a top, a base and a front having at least one door, wherein the base optionally has wheels attached, wherein at least one of the at least one door has a touch screen.

16. The method of claim 15 wherein the cabinet includes an angled containment floor that directs chemical to a drain pan.

17. A method for supplying multiple chemicals to a process tool, comprising: supplying a first chemical, a second chemical and a third chemical to a process tool from a system for delivering multiple different chemicals to a process tool,

wherein the system comprises:

a first refill canister and a first process canister that are connected to a first manifold that connects to at least one first process line wherein the first refill canister refills a first chemical to the first process canister through the first manifold and wherein the first process canister supplies the first chemical to the process tool;

a second refill canister and a second process canister that are connected to a second manifold that connects to at least one second process line wherein the second refill canister refills a second chemical to the second process canister through the second manifold and wherein the second process canister supplies the second chemical to the process tool;

REPLACED BY  
ART 34 AMDT

a third refill canister and a third process canister that are connected to a third manifold that connects to at least one third process line wherein the third refill canister refills a third chemical to the third process canister through the third manifold and wherein the third process canister supplies the third chemical to the process tool;

5 wherein the first refill canister, the first process canister, the second refill canister, the second process canister, the third refill canister, the third process canister, and the first, second and third manifolds are housed in a cabinet.

10 18. The method of claim 17 further comprising a fourth refill canister and a fourth process canister are connected to a fourth manifold that connects to at least one fourth process line wherein the fourth refill canister refills the fourth process canister through the fourth manifold and wherein the fourth refill canister and the fourth process canister and fourth manifold are housed in the cabinet.

15 19. The method of claim 17 wherein the cabinet that houses a total of six or eight canisters.

20 20. The method of claim 17 wherein at least one of the manifolds comprises: a vacuum supply valve; a vacuum generator; a pressure vent valve; a gas inlet valve; a bypass valve; an isolation valve; a control valve; a canister inlet valve; a canister outlet valve; and a canister inlet coupler; wherein the vacuum supply valve is connected to the vacuum generator; wherein the vacuum generator is connected to the pressure vent valve and the control valve; wherein the gas inlet valve is connected to pressure vent valve and bypass valve; wherein the bypass valve is further connected to isolation valve and the canister inlet valve; wherein the isolation valve is also connected to canister outlet valve; wherein canister inlet valve is connected to control valve, and canister outlet valve.

30 21. The method of claim 17 wherein at least one manifold of the system comprises: a vacuum supply valve connected to a vacuum generator; a pressure vent valve connected to the vacuum generator and to a gas inlet valve; a control valve connected to vacuum generator; wherein the gas inlet valve is also connected to a bypass valve, an

REPLACED BY  
ART 34 AMDT

isolation valve connected to a canister outlet valve and to the bypass valve, and a canister inlet valve connected to the bypass valve, the control valve, and a canister outlet valve.

22. The method of claim 17 wherein the first refill canister contains  
5 tetraethylorthosilicate; wherein the second refill canister contains triethylphosphate or triethylphosphite; and wherein the third refill canister contains triethylborate.

23. The method of claim 17 wherein the cabinet is composed of two sides, a back,  
a top, a base and a front having at least one door, wherein the base optionally has wheels  
10 attached, wherein at least one of the at least one door has a touch screen.


24. The method of claim 23 wherein the cabinet includes an angled containment  
floor that directs chemical to a drain pan.



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : <b>F17C 13/04, 7/00</b>		A1	(11) International Publication Number: <b>WO 00/00767</b>
			(43) International Publication Date: 6 January 2000 (06.01.00)
(21) International Application Number: PCT/US99/14845		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 30 June 1999 (30.06.99)			
(30) Priority Data: 60/091,191      30 June 1998 (30.06.98)      US			
(71) Applicant (for all designated States except US): ADCS, LTD. [US/US]; Suite 330, 6805 Capital of Texas Highway, Austin, TX 78731 (US).			
(72) Inventors; and (75) Inventors/Applicants (for US only): NOAH, Craig, M. [US/US]; 881 San Ardo Way, Mountain View, CA 94043 (US). GREGG, John, N. [US/US]; 100 5th Street, Marble Falls, TX 78611 (US).			
(74) Agent: O'KEEFE, Robert, M.; Jones, O'Keefe, Egan & Peterman, Building C, Suite 200, 1101 Capital of Texas Highway South, Austin, TX 78746 (US).		Published With international search report.	

(54) Title: SYSTEM FOR SUPPLY OF MULTIPLE CHEMICALS TO A PROCESS TOOL

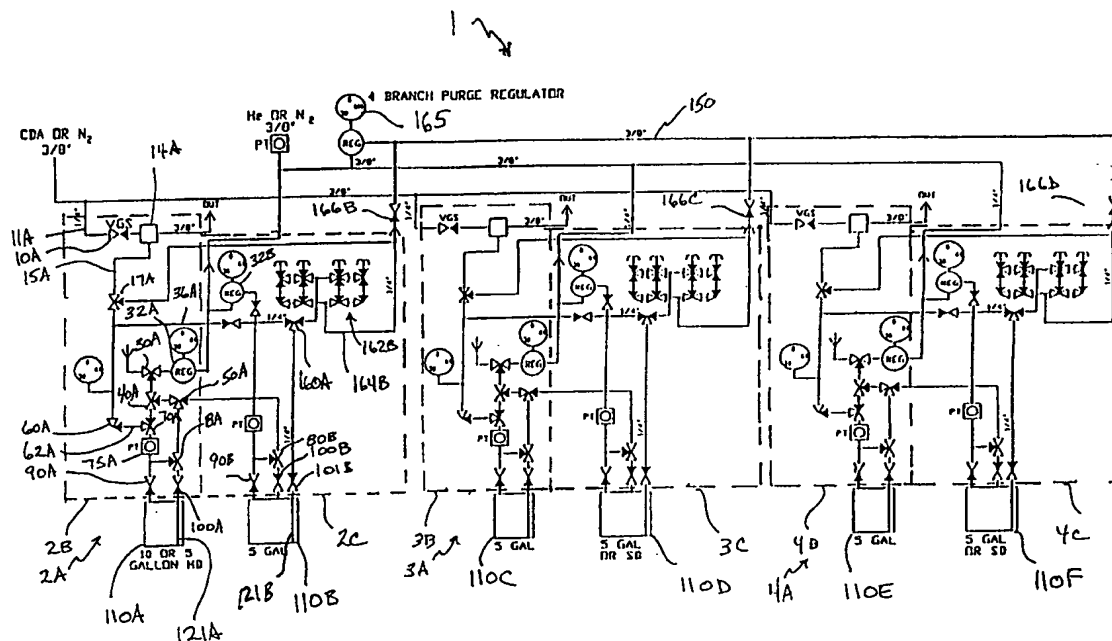

## (57) Abstract

This invention concerns a system for delivering multiple different chemicals to a process tool, comprising: a first supply canister connected to a first supply manifold that connects to a process line; a second supply canister connected to a second supply manifold that connects to the process line.



**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**SYSTEM FOR SUPPLY OF MULTIPLE CHEMICALS TO A PROCESS TOOL****BACKGROUND OF INVENTION**

5           This invention generally pertains to a chemical delivery system.

          The chemicals used in the fabrication of integrated circuits must have an ultrahigh purity to allow satisfactory process yields. As integrated circuits have decreased in size, there has been a directly proportional increase in the need for maintaining the purity of source  
10 chemicals. This is because contaminants are more likely to deleteriously affect the electrical properties of integrated circuits as line spacing and interlayer dielectric thickness decrease.

          One ultrahigh purity chemical used in the fabrication of integrated circuits is tetraethylorthosilicate (TEOS). TEOS has been widely used in integrated circuit  
15 manufacturing operations such as chemical vapor deposition (CVD) to form silicon dioxide films. These conformal films are generated upon the molecular decomposition of TEOS at elevated temperatures in plasma enhanced and atmospheric pressure reactors (PECVD, APCVD). TEOS is typically used for undoped, and phosphorous and boron doped interlayer dielectrics, intermetal dielectrics, sidewall spacers, and trench filling applications.

20

          Traditionally, high purity TEOS (and dopants) has been fed to the CVD reaction chamber from small volume quartz containers. More recently, stainless steel containers have been developed, such as described in U.S. Patents 5,465,766; 5,562,132; 5,590,695; 5,607,002; and 5,711,354.

25

          In the production of some electronic devices, multiple chemical compounds have been fed to the reactor so that a layer containing multiple elements may be formed. This has been typically performed by pre-mixing the components and then delivering the mixture to the reactor. For example, TEOS and triethylborate may be fed to the process tool to provide a layer which is in situ doped with boron.

30

It would be highly desirable to provide a system that enables the delivery of each component separately such that proportions of components at the tool may be readily changed and optimized for the desired result. It would also be desirable to provide a system that enables chemicals to be mixed in the delivery system, prior to introduction into the process tool. It would also be desirable to provide a single unit having a smaller footprint than systems employing multiple dispensing points.

### SUMMARY OF INVENTION

This invention provides a solution to one or more of the needs, disadvantages, and shortcomings described above.

In one broad respect, this invention is system for delivering multiple different chemicals to a process tool, comprising: a first refill canister and a first process canister that are connected to a first manifold that connects to at least one first process line wherein the first refill canister refills a first chemical to the first process canister through the first manifold and wherein the first process canister supplies the first chemical to the process tool; a second refill canister and a second process canister that are connected to a second manifold that connects to at least one second process line wherein the second refill canister refills a second chemical to the second process canister through the second manifold and wherein the second process canister supplies the second chemical to the process tool; wherein the first refill canister, the first process canister, the second refill canister, the second process canister and the first and second manifolds are housed in a cabinet. Additional canisters, manifolds, and process lines may be added depending on the desired number of chemicals to be delivered by the system. As used herein, "process line" refers to a line that connects directly or indirectly from the system to the process tool which uses the chemicals being supplied by the system. One non-limiting, representative example of a process tool is a CVP reactor. The system may be housed in a single cabinet which provides containment for the chemicals in the canisters and in which the manifolds may be mounted. Typically, the different chemicals are mixed at the tool; however, the chemicals may be optionally mixed in-line before reaching the tool.

In another broad respect, this invention is a method for manufacturing a system for delivery of multiple different chemicals, comprising: connecting a first refill canister and a first process canister to a first manifold that connects to at least one first process line wherein the first refill canister refills a first chemical to the first process canister through the first manifold and wherein the first process canister supplies the first chemical to the process tool; connecting a second refill canister and a second process canister to a second manifold that connects to at least one second process line wherein the second refill canister refills a second chemical to the second process canister through the second manifold and wherein the second process canister supplies the second chemical to the process tool; connecting a third refill canister and a third process canister to a third manifold that connects to at least one third process line wherein the third refill canister refills a third chemical to the third process canister through the third manifold and wherein the third process canister supplies the third chemical to the process tool; and housing the first refill canister, the first process canister, the second refill canister, the second process canister, the third refill canister, the third process canister, and the first, second and third manifolds in a cabinet.

In some embodiments, this invention provides a system that enables the delivery of each component separately such that proportions of components at the process tool may be readily changed and optimized for the desired result. In certain embodiments, this invention also provides a system that enables chemicals to be mixed in the delivery system, prior to introduction into the process tool. Furthermore, the systems of this invention may advantageously, in certain embodiments, provide a smaller footprint resulting in cost savings due to exhaust for only one cabinet, simplification of maintenance and support for the system, all as otherwise would be provided by multiple systems each housing only one process canister or one pair of process/refill canisters. For chemicals used in the highest volume in the cabinet (e.g., TEOS), one or both of the canisters may be refilled from a larger bulk system (e.g., from a significantly larger canister as for example a 200 liter canister filling a 5 or 10 gallon canister in the cabinet). This has the added benefit that a fab may be supplied its source of TEOS from the system of this invention if the dedicated TEOS line and source is down.

In another broad respect, this invention is a method for supplying multiple chemicals to a process tool, comprising: supplying a first chemical, a second chemical and a third chemical to a process tool from a system for delivering multiple different chemicals to a process tool, wherein the system comprises: a first refill canister and a first process canister that are connected to a first manifold that connects to at least one first process line wherein the first refill canister refills a first chemical to the first process canister through the first manifold and wherein the first process canister supplies the first chemical to the process tool; a second refill canister and a second process canister that are connected to a second manifold that connects to at least one second process line wherein the second refill canister refills a second chemical to the second process canister through the second manifold and wherein the second process canister supplies the second chemical to the process tool; a third refill canister and a third process canister that are connected to a third manifold that connects to at least one third process line wherein the third refill canister refills a third chemical to the third process canister through the third manifold and wherein the third process canister supplies the third chemical to the process tool; wherein the first refill canister, the first process canister, the second refill canister, the second process canister, the third refill canister, the third process canister, and the first, second and third manifolds are housed in a cabinet.

Advantageously, the manifolds that may be employed in the practice of this invention may enable improved purge efficiency for low vapor pressure materials and toxic chemicals. The system of this invention may enable supply of multiple chemical reagents at any desired compositional proportion without the need to change out canisters and the like if the proportions are to be changed. The inventors recognized that a need existed for a system that provides multiple chemicals to a process tool and that provides both a process canister and a refill canister for each chemical, all within a single cabinet. Prior systems that were capable of providing multiple chemicals used a single canister for each chemical; hence, prior systems went down when a particular canister had to be changed out. An important advantage of this invention is that all three chemicals can be continuously supplied to a process tool as a given refill canister is being replenished or replaced with a fresh refill canister. This advantage allows a process tool to be continuously supplied and thus the process tool does not go down due to the system being down.

### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 depicts a manifold and canister configuration for delivery and in situ mixing of a plurality of chemicals to a process tool.

5

FIG. 2A depicts a representative manifold configuration of this invention.

FIG. 2B depicts the path of gas in the manifold while a canister is in service.

10 FIG. 3 depicts the path of flow in the manifold during a depressurization step to remove the head pressure in the canister.

FIG. 4 depicts the flow of gas in the manifold during a liquid drain.

15 FIG. 5 depicts the flow of gas in the manifold during a cycle purge.

FIG. 6 depicts a flowing purge in the manifold during a cycle purge.

FIG. 7 depicts another representative manifold configuration of this invention.

20

FIG. 8 depicts the flow of gas in the manifold of FIG. 7 during a cycle purge.

FIG. 9 depicts a representative cabinet that may house the canisters and manifolds of this invention.

25

FIG. 10 depicts a non-limiting representative configuration of canisters and manifolds in a cabinet of this invention.

FIG. 11 depicts components of refill manifold 2B and supply manifold 2C.

30

FIGS. 12 and 12a depict additional manifold and canister configurations for delivery of a plurality of chemicals to a process tool.

FIG 13 depicts one embodiment of a manifold used in the practice of this invention.

FIGS. 14, 14a, 14b, 14c, 14d, 14e and 14f depict various exterior, interior, and cutaway views of a cabinet used in the practice of this invention.

### DETAILED DESCRIPTION OF THE INVENTION

A general description of the metallic canisters, chemical refill system, operating procedures, components, starting manifold system, and so forth, which may be used in the practice of this invention is set forth in U.S. Patents 5,465,766; 5,562,132; 5,590,695; 5,607,002; and 5,711,354, and SN 08/893,913, filed July 11, 1997, the entire contents of which are incorporated by reference herein.

In FIG. 1 there is shown a representative, non-limiting example of a system configuration of this invention. The system 1 in FIG. 1 includes valves and lines which have been numbered to correspond with those of FIG. 7, to the extent there is overlap. FIG. 1 shows a system 1 that in general provides for refill and delivery of three chemicals. In general, canisters 110A and 110B may contain first chemical, such as TEOS. A manifold 2A includes refill manifold 2B, which connects to canister 110A, and supply manifold 2C which connects to supply canister 110B. Dotted lines 2B and 2C outline the refill and supply manifolds. In addition, system 1 includes manifolds 3A and 4A which comprise refill manifolds 3B and 4B and supply manifolds 3C and 4C, respectively. Refill manifolds 3B and 4B connect to canisters 110C and 110E, with supply manifolds 3C and 4C connecting to supply canisters 110D and 110F.

The system configuration in FIG. 1 employs three essentially identical manifolds 2A, 3A, and 4A. However, the individual manifold designs may vary widely, both individually and overall. For instance, while FIG. 1 depicts use of refill manifold 2B which corresponds to that shown in FIG. 7, the system 1 may instead employ the manifold shown in FIG. 2A or

in U.S. Patents in U.S. Patents 5,465,766; 5,562,132; 5,590,695; 5,607,002; and 5,711,354, incorporated herein by reference. The supply manifolds, likewise, may be of different design.

By increasing head pressure in supply canister 110B, liquid chemical may be forced  
5 out through line 121B, CI 101B, four branch supply valve 160A to four branch supply manifold 162B from which chemical is distributed to one or more process tools. Output lines may be connected to any of the four exit ports of the four branch supply manifold 162B, with such output lines leading to a canister, a valve manifold box containing another four branch supply manifold, or a process tool. Non-limiting examples of valve manifold boxes are  
10 described in U.S. Patent application Serial Number 09/046,907, filed May 24, 1998, incorporated herein by reference. Chemical may be dispensed from supply canisters 110D and 110F by a similar procedure. Chemical may be delivered to a process tool by use of a pump that withdraws chemical from the supply canisters rather than pushing, mechanical pressure, via a pneumatic cylinder, or via a bag of chemical in a canister that has pressure  
15 applied to it, or via a bag in the canister which supplies the pressure as by filling the bag with gas or liquid. In FIG.1, vacuum can be provided via open valve 17A to the four branch manifold 162B while the four branch manifold continues to provide chemical. It should be appreciated that the branched supply manifold 162B uses four branch valves, a supply manifold may use any number of valves. For instance, the branched supply manifold may  
20 employ two or more branch valves. Although there is no limit as to the number of branch valves in the branched supply manifold, typically the number of valves is 10 or less. It should be noted that the branched supply manifold is connected to and in communication with the process line.

25 Additional advantages of this invention include the controlling of valve sequence and flow of gas via a single control unit, with further economy from the capability of controlling a the system by a single off-site computer facilitated by use of a single process control unit in the system.

30 During a refill cycle, a controller (not shown) actuates valves such that pressurized gas is released by regulator 32A and flows through CGI 30A, CBV 40A, CP2 70A, and CI



90A into canister 110A. Similarly, line drain and flowing purge may be facilitated by introduction of inert gas through line 164B via regulator 165 and through valves 166B, 166C, and 166D. FIG. 1 also shows a pressure transducer 75A which serves to monitor pressure in the system.

5

In systems having two pressure transducers, the capability of balancing pressure in the system is improved. In this way, the configuration allows incremental release of head pressure off a process canister by closing 90B, pulling a vacuum on the line, closing off the vacuum, then opening 90B CI to incrementally drop pressure in the process canister. It should be noted that head pressure in the process canister is too high, refill of the process canister becomes problematic if not impossible. It is typically desirable for the process canister to have a pressure that is lower than the pressure in the refill canister by at least 5 psig. Reducing head pressure through practice of this invention may be automated and occur sequentially and in situ during use of the system.

15

The refill manifolds 2B, 3B, and 4B may be subjected to depressurization, liquid drain, vacuum, and flowing purge steps according to the procedures described below in connection with FIGS. 7 and 8. The depressurization, liquid drain, vacuum, and flowing purge steps may be effected on the supply manifolds 2C, 3C, and 4C through appropriate actuation of the refill manifolds.

20

In FIG. 2A there is shown a manifold system of this invention. In FIG. 2A, a vacuum source 14 such as a Venturi vacuum generator may be connected to vacuum supply valve ("VGS") 10 via line 12. VGS 10 functions to control the flow of gas (such as nitrogen, helium, or argon) via inert gas line 11 to the vacuum source 14 if the vacuum source is a Venturi vacuum generator. Vacuum source 14 may also be attached to exhaust line 13 which exits to exhaust. Vacuum source 14 may be connected to low pressure vent valve ("LPV") 20, carrier gas isolation valve ("CGI") 30, canister bypass valve ("CBV") 40, and control valve ("CP3") 60. For each of the valves in the FIGS., the open triangles represent lines which are always open, with the darkened triangles being closed until opened. In FIG. 2A, vacuum source 14 is connected to LPV 20 via line 15, tee 18, and line 17; to CGI 30 via line

25

30

15, tee 18, line 16, tee 35, and line 37; to CBV 40 via line 15, tee 18, line 16, tee 35, line 36, tee 44, and line 61. Check valve 33 in line 37 is closed unless and until the manifold eclipses the desired release pressure. Hence, vacuum source 14 is typically closed off to CGI 30 via line 37. Generally, the check valve 33 may be set to activate if the manifold pressure  
5 surpasses about 100 pounds per square inch. The check valve serves to vent gas if pressure in the system reaches a selected level. The function of LPV 20 is to control venting and evacuation of manifold and canister during start-up and canister change-out. Vacuum gauge 22 may also be connected to LPV 20. Vacuum gauge 22 may function to monitor vacuum during purge cycles. Line 23 may connect LPV 20 to carrier gas isolation valve ("CGI") 30.  
10 Line 31 may connect CGI 30 to regulator 32 which may supply a flow of pressurized inert gas. A delivery pressure gauge 36 may be tied into regulator 32 to monitor regulator pressure and pressure during all operations.

In FIG. 2A, line 34 may connect CGI 30 to CBV 40. Line 41 and 42 may attach CBV  
15 40 to process line isolation valve ("PLI") 50 and to control valve ("CP2") 70. The function of PLI 50 is to control the flow of chemical out of the manifold. CGI 30 functions to control the pressurized gas supply to the manifold. The function of CBV 40 is to control the supply of pressure or vacuum to PLI 50 and to line 71. Line 51 may carry chemicals to either a device outside the system, or to another canister to be refilled. Line 52 may serve to link PLI  
20 50 to control valve ("CP1") 80. Line 61 may connect control valve 60 to control valve 70. From control valve 70, line 71 may lead to tee fitting 72, with lines 73 and 74 running from tee 72 to control valve 80 and canister inlet ("CI") 90, respectively. CI 90 functions to control pressurization and evacuation of a canister. Control valve 80 may link to canister outlet ("CO") 100 via line 81. CO 100 functions to control the flow of chemical from a  
25 canister 110 during chemical delivery and the purging of the canister outlet weldment during canister changes. CI 90 and CO 100 serve to couple the manifold to the corresponding structures on a supply canister, such as male and female threaded joints. Fittings to join the manifold to canister 110 are typically present between CI 90 and tee 72, and between CO 100 and CP1 80. If CO 100 is a dual activator valve, tee 72 can be shifted down to directly  
30 connect with CI 90, such that a line connects the dual activator directly to CI 90.

Canisters 110 may be loaded with a variety of chemicals, and are typically burdened with high purity chemicals for use in semiconductor manufacture. For example, the canisters may contain TEOS, arsenic compounds, titanium compounds, boron compounds, and so forth. In one embodiment of this invention, the canister 110 is at least partially filled with a chemical which is at least 99.9999% pure based on the amount of trace metals in the chemical.

The aforementioned lines, which may also be referred to as conduits, tubing, pipes, passages, and the like, may be constructed of metal tubing, for example, such as stainless steel tubing. Each of the valves may be conventional pneumatically actuated valves, such as a NUPRO 6L-M2D-111-P-III gas control valve. Likewise, the regulator can be a standard type, such as an AP Tech 1806S 3PW F4-F4 V3 regulator. The system may be assembled using conventional methods, such as by using pressure fitting valves, by welding, and the like. The valves may be controlled using conventional process control such as an Omron programmable controller box wired to a touch screen control panel. Alternatively, the valves may be controlled using an ADCS APC™ Controller which incorporates an imbedded microprocessor for command sequence execution, with software residing on an EPROM. The control unit, for example, may control flow of pressurized gas to open or close pneumatic valves.

20

During use, the manifold of this invention may be operated as follows. To push chemical out of the canister 110 to the delivery point, the valves in the manifold are appropriately opened and closed to pressurized gas into the system and into the canister. In FIG. 2B, line 120 illustrates the path of pressurized gas entering canister 110, with line 121 showing the path of liquid chemical exiting canister 110 through a dip tube 111. Thus, pressurized gas from a source (not shown) is released by regulator 32 into line 31. The gas thereafter passes through open CGI 30, then through line 34, CBV 40, line 71, CI 90, and into canister 110. Pressure from entering gas forces liquid chemical up the dip tube, and through CO 100, line 81, CP1 80, line 52, PLI 50, and out line 51 to the receiving point.

30

When a supply canister (even a full canister) is being changed out, the lines may be purged to rid the manifold of residual chemicals. The first step is depressurization, which functions to remove the head pressure in canister 110. Depressurization may be affected in a few ways. For example, two procedures by which depressurization may occur are depicted in FIG. 3. In one depressurization method, depicted by solid line 130, VGS 10 is opened to allow gas to flow from line 11 through line 12 and into vacuum source 14 such that a vacuum is generated with the flow exiting via line 13 to exhaust. The vacuum which is generated in source 14 pulls a vacuum on line 15, tee 18, line 16, tee 35, line 36, tee 44, line 61, through open CPI 60, line 62, CP2 70, line 71, tee 72, line 74, and open CI 90, thereby pulling a vacuum on the head space of canister 110. Alternatively, depressurization can be affected by opening LPV 20, CP2, and CI 90 so that the vacuum is pulled via solid line 135.

After depressurization, a liquid drain is instituted to clear the lines (weldments) of liquid. Thus, in FIG. 4 gas is introduced via regulator 32 into line 31. CGI 30, CBV 40, and CO 100 are open such that gas flows through lines 34, 41, 52, and 81 such that liquid chemical is forced back into canister 110. The flow of gas during the line drain is illustrated by solid line 140.

Thereafter, a cycle purge is instituted which includes a vacuum step and a flowing purge step as illustrated in FIGS. 5 and 6, respectively. The vacuum step may be accomplished in a variety of ways, including via the configurations depicted by solid lines 150 and 155 in FIG. 5. Thus, in one embodiment, CBV 40 and LPV 20 is open such that when VGS 10 is opened to allow gas into vacuum source 14 via lines 11 and 12, a vacuum is drawn out to exhaust via line 13, with a vacuum thus being pulled on lines 15, 17, 23, 34, 41, 52, and 81. Alternatively, LPV 20 and CP2 70 are open such that a vacuum is pulled on lines 15, 17, 23, 34, 42, 71 and 74. In addition, LPV 20, CP2 70 and CBV 40 can all be open such that a vacuum is pulled on lines 42, 71, and 74 as well as on lines 41, 52, and 81. The openings can be alternated so that lines 42/71/74 and 41/52/81 are intermittently evacuated.

In FIG. 6, a flowing purge of the cycle purge is illustrated. In FIG. 6, regulator 32 allows pressurized gas to enter line 31. With CGI 30, CBV 40, CP1 80, and CP1 60 open

(note CI 90 and CO 100 are closed), the gas flows through lines 34, 41, 52, 73, 71, 62, 61, 36, 16, 15, and 13 to thereby purge the manifold, as depicted in FIG. 6 by solid line 160. LPV 20 may be intermittently opened so that lines 23 and 17 may be purged. After purge, the fittings are typically broken while a positive pressure on the manifold is maintained so that moisture does not enter the manifold. For instance, CGI 30, CBV 40, and CP2 70 may be opened so that gas flows out lines 74 and 81 after the fittings are broken. After a new canister is seated, the purge cycle is typically repeated to remove any water or other contaminant that might have entered the manifold, as well as any water in the fittings and weldments of the new canister.

In FIG. 7 there is shown an alternative embodiment of this invention which is similar to the embodiment depicted in FIG. 1 except that LPV 20, lines 17 and 23, and gauge 22 are absent. If CO 100 is a dual activator valve, tee 72 can be shifted down to directly connect with CI 90 and control valve 80 directly attached to the dual activator, such that a line connects the dual activator directly to CI 90 and such that the number of potential dead legs in the manifold is reduced. In the embodiment shown in FIG. 7, line 43 to CBV 40 may be optionally removed. The same flow scheme shown in FIG. 2 may be employed to push chemicals out of canister 110 for the configuration in FIG. 7. Depressurization of the configuration shown in FIG. 7 may be accomplished using the flow scheme depicted as line 130 in FIG. 3. The liquid drain depicted as solid line 140 in FIG. 4 may then be employed for the configuration of FIG. 7. The vacuum step may be accomplished as set forth in FIG. 8 as depicted by line 180. The flowing purge of FIG. 6 may be used for the configuration in FIG. 7. The embodiment of the invention has many advantages including a reduced number of valves which results in lower cost of the manifold, a reduction in the number of points where a leak may occur as well as a reduction in the chances for valve failure for a given manifold. This embodiment also reduces the number of dead legs in the system, resulting in a more effective flowing purge.

The types of chemicals which may be transferred using the delivery system of this invention may vary widely depending on the type of process tool and desired outcome. Non-limiting examples of representative chemicals include tetraethylorthosilicate ("TEOS"),

triethylphosphate, trimethyl phosphite, trimethyl borate, titanium tetrachloride, tantalum compounds, and the like; solvents such as chlorinated hydrocarbons, ketones such as acetone and methylethylketone, esters such as ethyl acetate, hydrocarbons, glycols, ethers, hexamethyldisilazane ("HMDS"), and the like; solid compounds dispersed in a liquid such as  
5 barium/strontium/titanate cocktails (mixtures). These examples of chemicals are not intended to be limiting in any way. The chemicals may be of a variety of purities, and mixtures of chemicals can be used. In one embodiment, a single type of chemical is employed. A given chemical may advantageously have a purity of 99.999% or more with respect to trace metals. If dispersions are employed, it is preferable to flush the lines out with liquid solvents such as  
10 triglyme or tetrahydrofuran (THF) so that compounds are not precipitated in the lines when the lines are depressurized. Additionally, for any of the embodiments of this invention, it is contemplated that the manifold can be heated to accelerate evaporation of chemicals in the lines. In this regard, the manifold can be maintained in a heated environment, wrapped with heating tape connected to a variac or the like. To facilitate evaporation during a flowing  
15 purge, heated gas could alternatively be employed, such as heated argon, nitrogen, or other inert gas. Similarly, a vaporizer for chemicals containing solid active components may be interposed at a point in the process line. U. S. Patent 5,362,328 incorporated herein by reference, describes a non-limiting example of a vaporizer. Combinations of these techniques can also be employed. For some types of chemicals, it may be possible to purge with reactive  
20 chemicals, which react with one or more of the compounds in the line to produce more readily evacuated compounds.

Advantageously, the system of this invention may be used to deliver three or more chemicals to a process tool which uses the mixture of chemicals. The system of this invention  
25 may thus provide chemicals to any process tool which requires a chemical during its use. Such process tools may include apparatuses for chemical vapor deposition, photolithography, and etch applications. These process tools are frequently used in the fabrication of electronic devices such as integrated circuits, memory circuits, flat panel display, possibly fiber optic manufacturing, multichip modules (e.g., "MCMs"), and so forth. In addition, it should be  
30 appreciated that while this invention may be used to supply a chemical such as TEOS to a

process tool such as a CVD reactor used in the fabrication of integrated circuits, memory devices, and the like, the system may be used in other processes.

5 A pressure transducer may be added on a spare port of the canister to allow for pressure management control to keep an inlet valve for helium or the like closed during operation and to only open when the volume is down.

10 The manifolds of this invention may include a sensor attached, for example, in line 15 to determine whether the lines manifold contains chemicals. Similarly, a sample port could be included in line 15 where a sample of gas from the line can be withdrawn and tested using an analytical device to test for the presence of the chemical.

15 In FIG. 9 there is shown a non-limiting representative example of a cabinet 310 that may be used in the practice of this invention. The cabinet 310 may include front 316, sides 312 and 314 (not shown), and back (not seen) 318 panels, together with top 320 and bottom (not shown). The dimensions and configuration of the sides may vary widely depending on the size, number, and configuration of the canisters and manifolds. For example, while the canisters may be arranged in pairs, two deep, as in FIG. 10, a single canister can be used for each chemical or the paired canisters may be positioned side by side as observed from the front. Referring to FIG. 9, the cabinet may include a variety of advantageous components, such as a set of doors 330A and 330B, a user interface 331 such as a color liquid crystal display touchscreen, vent port 335, base 340 that serves as a containment reservoir in the event of a chemical spill, and lower ventilation slits 345 for influx of air flow into the cabinet. Optional flange 332 may be employed to affix the cabinet 310 to the floor.

25

Referring again to FIG. 10 there is shown a non-limiting representative configuration of canisters and manifolds in the cabinet. In FIG. 10, first, second, and third refill canisters 110 A, 110C, and 110E provide chemicals to first, second, and third supply canisters 110B, 110D, and 110F. Each of the set of refill and supply canisters may contain the same chemical, with each set of canisters containing a different chemical. As shown in FIG. 1, each pair of supply and refill canisters may be connected to a supply and a refill manifold that

30

form part of an overall manifold. In FIG. 10, three overall manifolds are employed, one manifold for each set of canisters. In FIG. 10, several details as depicted in FIG. 1 have been omitted for simplicity. In general it is seen that the cabinet includes supply (process) manifolds 2B, 3B, and 4B; refill manifolds 2C, 3C, and 4C which include four branch  
5 manifolds 162B, 163B, and 164B. FIG. 11 illustrates a three-dimensional representative view of certain components of the manifold 2A that could be mounted within a cabinet 310. As can be seen in FIG. 11, components of refill manifold 2B and supply manifold 2C are shown, including four branch supply manifold 162B, such as may be employed in FIG. 10.

10 FIGS. 12 and 12a depict additional manifold and canister configurations for delivery of a plurality of chemicals to a process tool. FIGS. 12 and 12a are similar to FIG. 1, but are different in certain ways. The system 1 in FIGS. 12 and 12a includes valves and lines which have been numbered to correspond with those of FIG. 1, to the extent there is overlap. In FIG. 12 there is shown another representative, non-limiting example of a system configuration of  
15 this invention. FIG. 12 shows a system 1 that in general provides for refill and delivery of three chemicals.

The system configuration in FIG. 12 employs three essentially identical manifolds 2A, 3A, and 4A. By increasing head pressure in supply canister 110B, liquid chemical may be  
20 forced out through line 121B, CI 101B, four branch supply valve 160A to four branch supply manifold 162B from which chemical is distributed to one or more process tools. Output lines may be connected to any of the four exit ports of the four branch supply manifold 162B, with such output lines leading to a canister, a valve manifold box containing another four branch supply manifold, or a process tool. Chemical may be dispensed from supply canisters 110D  
25 and 110F by a similar procedure. Chemical may be delivered to a process tool by use of a pump that withdraws chemical from the supply canisters rather than pushing, mechanical pressure, via a pneumatic cylinder, or via a bag of chemical in a canister that has pressure applied to it, or via a bag in the canister which supplies the pressure as by filling the bag with gas or liquid. In FIG.12, vacuum can be provided via line 37A, which ties in above valve  
30 17A, through open valve 17A to the four branch manifold 162B while the four branch manifold continues to provide chemical. Vacuum may also be provided to the valving



attached to canister 110B by opening valve 60B in 2C. It should be appreciated that the branched supply manifold 162B uses four branch valves, a supply manifold may use any number of valves. For instance, the branched supply manifold may employ two or more branch valves. Although there is no limit as to the number of branch valves in the branched supply manifold, typically the number of valves is 10 or less. It should be noted that the branched supply manifold is connected to and in communication with the process line. In FIG. 12, control valve 80B is connected to canister outlet 101B rather than inlet valve 100B as shown in FIG. 1. It may be appreciated that in FIG. 12 the valve configuration in 2C is substantially similar to the valve configuration in 2B, which is in contrast to the configuration shown in FIG. 1. Thus, in FIG. 12 while 2B employs valves 60A, 70A, 40A, 30A and 50A, 2C similarly employs valves 60B, 70B, 40B, 30B and 50B. In FIGS. 1, 12 and 12A, each of the process canisters (110B, 110D and 110F) has an outlet valve to which a dip tube is connected, an inlet valve through which chemical is provided to the process canister, and a third valve which serves to provide positive pressure or vacuum to the canister. The configuration of FIG. 12a is substantially similar to FIG. 12 except that distribution manifolds 162B have been removed. This is particularly applicable to systems that supply small quantities of chemicals during a fabrication process, or if only a single tool is being fed chemicals. In both FIG. 12 and FIG. 12a, the system provides a source of silicon, phosphorous and boron.

FIG 13 depicts one embodiment of a manifold used in the practice of this invention. This configuration is used in FIG. 12 and FIG. 12a. Thus, in FIG. 13, the manifold amounts to sections of 2B and 2C, for example, wherein the left side that connects to a refill canister includes valves 30A, 40A, 50A, 60A and 70A, and wherein the right side, which connects to a process canister, includes valves 30B, 40B, 50B, 60B and 70B. Each respective side also includes regulators 32A, 32B which serve to meter inert gas into the system and pressure transducers 75A and 75B which serve to monitor pressure.

FIGS. 14, 14a, 14b, 14c, 14d, 14e and 14f depict various exterior, interior, and cutaway views of a cabinet used in the practice of this invention. FIG. 14 shows a representative top for a cabinet of this invention. The top 1401 has dimensions appropriate to

fit a given width and length of the cabinet. The top 1401 includes a duct 1402 which serves as an exit conduit for exhaust gases. Three groups of four holes 1403, 1404 and 1405 for distribution manifold outlet lines are included in the top. It is contemplated that the outlet lines (e.g., stainless steel tubing) connect to the distribution manifold and are guided through  
5 an appropriate hole, then connect to a process tool or the like. Similarly, the holes may be fitted with fittings (such as male VCR fittings) so that the outlet lines connect to the fittings and then additional lines to the process tool or the like connect to the male fitting on the exterior side of the top. If distribution manifolds are omitted, as in FIG. 12a, then less holes need be bored in the top or, if a top is used which already has multiple holes drilled as in the  
10 configuration depicted in FIG. 14, the holes may be capped to close the opening. The top may also include other holes or fittings such as an inlet for a bulk chemical canister 1405, for inert gas source 1406, for Venturi vacuum 1407, 1408 and 1409, for electrical inlets 1410, for air inlet 1411. In this upper view of the top 1401, there are also shown option items such as removable wheels 1412, and the wheels may also be on the left side of the top. The wheels  
15 would attach to the base but are shown here from this perspective view. Hinges 1413 serve to attach a section 1414 so that an operator can access the inside of the cabinet from the top. In this embodiment, a circuit breaker 1415 is also depicted, which would connect to internal electrical instrumentation.

20 FIG. 14a shows the front 1420 of the cabinet. The placement of wheels 1412 are readily seen in this view as being attached to the lower section of the cabinet. The width "W" of the cabinet will vary based on the size and number of canisters in the cabinet. For instance, in one embodiment, the cabinet is wide enough to house three canisters. In another embodiment, the cabinet is wide enough to house four canisters. In FIG. 14a, the duct 1402  
25 protrudes from the top. Two doors 1421a, 1421b form part of the front. The doors may be on spring loaded hinges for ease of entry. Handles 1422a, 1422b are included on the doors, as are vents 1423a, 1423b. A touch screen 1424 provides a means for inputting instructions for the control instrumentation (not shown). A small window 1425 allows an operator to observe the inside of the cabinet without opening the doors 1422a, 1422b. The front 1420 includes an  
30 upper area 1426 and a lower area 1427. The upper area 1426 provides additional space for manifolds, instrumentation and the like that may be included in the cabinet. The lower area

1427 typically provides an area above the canisters that serves as a safety containment area in the event of leakage. The containment area is commonly angled as depicted by phantom line 1428 so that liquid chemical may gravity feed toward drain pan 1429. A sump (not shown) may also be included to pump off liquid chemical from the drain pan 1429.

5

FIG. 14b is a side view of the cabinet showing one of the sides 1430. In this partial cutaway view, inner aspects of certain components are shown, including the touch screen 1424 and duct 1402. In this embodiment, an area 1431 defines an area that serves to house control instrumentation. A second recess area 1432 is also shown. FIG. 14c shows the back 1435 of the cabinet. The cabinet shown in FIGS. 14-14c has a cabinet width (excluding appendages such as wheels) of about 44.75 inches (about 114 cm), a depth of about 28 inches (about 71 cm) and a height with wheels to the duct of about 79 1/8 inches (about 198 cm). It should be appreciated that these dimensions may vary depending on the number and size of the canisters.

15

FIG. 14d and 14e depict front and side views of a pair of canisters seated in a cutaway portion of a cabinet. In FIG. 14d a canister 1440 sits in an elevated position above the bottom 1441 of the cabinet and may rest on a shelf 1442. The valves, regulators and tubing shown in the upper half of the cabinet correspond to manifold 2A of FIG. 1 or FIG. 12. Since this is a cutaway view, additional canister pairs would be housed in the remainder of the cabinet. In this sense, FIG. 14d shows a representative "cell" of the system. It should be appreciated that while a cabinet having 3 cells is depicted in FIG. 14d, additional cells may be included such that a cabinet houses 4 pairs of canisters, 5 pairs of canisters and so forth. FIG. 14e shows a side view of the canister pair. Here it is seen that the back canister 1443 sits on the floor of the cabinet. Each of canisters 1440 and 1443 may be attached to respective portions of manifold 2A by stainless steel tubing, not shown. An upraised canister 1440 facilitates easier change out of the canister for the operator. FIG. 14f shows a perspective view of canisters 1440 and 1443. In this view it is seen that canister 1443 may be seated on a shelf 1450 to raise it just above the very base of the cabinet. This view also shows more detail of the hinges 1451 that may be used to attach the door 1421a to left side 1453, as well as a locking mechanism 1452 for the door that connect to handle 1422a.

30

Further modifications and alternative embodiments of this invention will be apparent to those skilled in the art in view of this description. Accordingly, this description is to be construed as illustrative only and is for the purpose of teaching those skilled in the art the manner of carrying out the invention. It is to be understood that the forms of the invention herein shown and described are to be taken as presently preferred embodiments. Equivalent elements may be substituted for those illustrated and described herein, and certain features of the invention may be utilized independently of the use of other features, all as would be apparent to one skilled in the art after having the benefit of this description of the invention.

**WHAT IS CLAIMED IS:**

1. A system for delivering multiple different chemicals to a process tool, comprising:

5 a first refill canister and a first process canister that are connected to a first manifold that connects to at least one first process line wherein the first refill canister refills a first chemical to the first process canister through the first manifold and wherein the first process canister supplies the first chemical to the process tool;

10 a second refill canister and a second process canister that are connected to a second manifold that connects to at least one second process line wherein the second refill canister refills a second chemical to the second process canister through the second manifold and wherein the second process canister supplies the second chemical to the process tool;

wherein the first refill canister, the first process canister, the second refill canister, the second process canister and the first and second manifolds are housed in a cabinet.

15

2. The system of claim 1 further comprising: a third refill canister and a third process canister are connected to a third manifold that connects to at least one third process line wherein the third refill canister refills the third process canister through the third manifold and wherein the third refill canister and the third process canister and third manifold are housed in the cabinet.

20

3. The system of claim 2 further comprising a fourth refill canister and a fourth process canister are connected to a fourth manifold that connects to at least one fourth process line wherein the fourth refill canister refills the fourth process canister through the fourth manifold and wherein the fourth refill canister and the fourth process canister and fourth manifold are housed in the cabinet.

25

4. The system of claim 1 wherein the cabinet houses a total of six or eight canisters.

30

5. The system of claim 1 wherein at least one of the manifolds comprises: a vacuum supply valve; a vacuum generator; a pressure vent valve; a gas inlet valve; a bypass valve; an isolation valve; a control valve; a canister inlet valve; a canister outlet valve; and a canister inlet coupler; wherein the vacuum supply valve is connected to the vacuum generator; wherein the vacuum generator is connected to the pressure vent valve and the control valve; wherein the gas inlet valve is connected to pressure vent valve and bypass valve; wherein the bypass valve is further connected to isolation valve and the canister inlet valve; wherein the isolation valve is also connected to canister outlet valve; wherein canister inlet valve is connected to control valve, and canister outlet valve.

6. The system of claim 1 wherein at least one manifold of the system comprises: a vacuum supply valve connected to a vacuum generator; a pressure vent valve connected to the vacuum generator and to a gas inlet valve; a control valve connected to vacuum generator; wherein the gas inlet valve is also connected to a bypass valve, an isolation valve connected to a canister outlet valve and to the bypass valve, and a canister inlet valve connected to the bypass valve, the control valve, and a canister outlet valve.

7. The system of claim 1 wherein the first refill canister contains tetraethylorthosilicate; wherein the second refill canister contains triethylphosphate or triethylphosphite; and wherein the third refill canister contains triethylborate.

8. The system of claim 1 wherein the cabinet is composed of two sides, a back, a top, a base and a front having at least one door, wherein the base optionally has wheels attached, wherein at least one of the at least one door has a touch screen.

9. The system of claim 8 wherein the cabinet includes an angled containment floor that directs chemical to a drain pan.

10. A method for manufacturing a system for delivery of multiple different chemicals, comprising:

connecting a first refill canister and a first process canister to a first manifold that connects to at least one first process line wherein the first refill canister refills a first chemical to the first process canister through the first manifold and wherein the first process canister supplies the first chemical to the process tool;

5        connecting a second refill canister and a second process canister to a second manifold that connects to at least one second process line wherein the second refill canister refills a second chemical to the second process canister through the second manifold and wherein the second process canister supplies the second chemical to the process tool;

10       connecting a third refill canister and a third process canister to a third manifold that connects to at least one third process line wherein the third refill canister refills a third chemical to the third process canister through the third manifold and wherein the third process canister supplies the third chemical to the process tool; and

15       housing the first refill canister, the first process canister, the second refill canister, the second process canister, the third refill canister, the third process canister, and the first, second and third manifolds in a cabinet.

11.     The method of claim 10 further comprising connecting a fourth refill canister and a fourth process canister to a fourth manifold that connects to at least one fourth process line wherein the fourth refill canister refills the fourth process canister through the fourth manifold and wherein the fourth refill canister and the fourth process canister and fourth manifold are housed in the cabinet.

12.     The method of claim 10 wherein at least one of the manifolds comprises: a vacuum supply valve; a vacuum generator; a pressure vent valve; a gas inlet valve; a bypass valve; an isolation valve; a control valve; a canister inlet valve; a canister outlet valve; and a canister inlet coupler; wherein the vacuum supply valve is connected to the vacuum generator; wherein the vacuum generator is connected to the pressure vent valve and the control valve; wherein the gas inlet valve is connected to pressure vent valve and bypass valve; wherein the bypass valve is further connected to isolation valve and the canister inlet valve; wherein the isolation valve is also connected to canister outlet valve; wherein canister inlet valve is connected to control valve, and canister outlet valve.

13. The method of claim 10 wherein at least one manifold of the system comprises: a vacuum supply valve connected to a vacuum generator; a pressure vent valve connected to the vacuum generator and to a gas inlet valve; a control valve connected to vacuum generator; wherein the gas inlet valve is also connected to a bypass valve, an isolation valve connected to a canister outlet valve and to the bypass valve, and a canister inlet valve connected to the bypass valve, the control valve, and a canister outlet valve.

14. The method of claim 10 wherein the first refill canister contains tetraethylorthosilicate; wherein the second refill canister contains triethylphosphate or triethylphosphite; and wherein the third refill canister contains triethylborate.

15. The method of claim 10 wherein the cabinet is composed of two sides, a back, a top, a base and a front having at least one door, wherein the base optionally has wheels attached, wherein at least one of the at least one door has a touch screen.

16. The method of claim 15 wherein the cabinet includes an angled containment floor that directs chemical to a drain pan.

17. A method for supplying multiple chemicals to a process tool, comprising: supplying a first chemical, a second chemical and a third chemical to a process tool from a system for delivering multiple different chemicals to a process tool,

wherein the system comprises:

a first refill canister and a first process canister that are connected to a first manifold that connects to at least one first process line wherein the first refill canister refills a first chemical to the first process canister through the first manifold and wherein the first process canister supplies the first chemical to the process tool;

a second refill canister and a second process canister that are connected to a second manifold that connects to at least one second process line wherein the second refill canister refills a second chemical to the second process canister through the second manifold and wherein the second process canister supplies the second chemical to the process tool;



a third refill canister and a third process canister that are connected to a third manifold that connects to at least one third process line wherein the third refill canister refills a third chemical to the third process canister through the third manifold and wherein the third process canister supplies the third chemical to the process tool;

5 wherein the first refill canister, the first process canister, the second refill canister, the second process canister, the third refill canister, the third process canister, and the first, second and third manifolds are housed in a cabinet.

10 18. The method of claim 17 further comprising a fourth refill canister and a fourth process canister are connected to a fourth manifold that connects to at least one fourth process line wherein the fourth refill canister refills the fourth process canister through the fourth manifold and wherein the fourth refill canister and the fourth process canister and fourth manifold are housed in the cabinet.

15 19. The method of claim 17 wherein the cabinet that houses a total of six or eight canisters.

20 20. The method of claim 17 wherein at least one of the manifolds comprises: a vacuum supply valve; a vacuum generator; a pressure vent valve; a gas inlet valve; a bypass valve; an isolation valve; a control valve; a canister inlet valve; a canister outlet valve; and a canister inlet coupler; wherein the vacuum supply valve is connected to the vacuum generator; wherein the vacuum generator is connected to the pressure vent valve and the control valve; wherein the gas inlet valve is connected to pressure vent valve and bypass valve; wherein the bypass valve is further connected to isolation valve and the canister inlet valve; wherein the isolation valve is also connected to canister outlet valve; wherein canister inlet valve is connected to control valve, and canister outlet valve.


30 21. The method of claim 17 wherein at least one manifold of the system comprises: a vacuum supply valve connected to a vacuum generator; a pressure vent valve connected to the vacuum generator and to a gas inlet valve; a control valve connected to vacuum generator; wherein the gas inlet valve is also connected to a bypass valve, an


isolation valve connected to a canister outlet valve and to the bypass valve, and a canister inlet valve connected to the bypass valve, the control valve, and a canister outlet valve.

22. The method of claim 17 wherein the first refill canister contains  
5 tetraethylorthosilicate; wherein the second refill canister contains triethylphosphate or triethylphosphite; and wherein the third refill canister contains triethylborate.

23. The method of claim 17 wherein the cabinet is composed of two sides, a back,  
a top, a base and a front having at least one door, wherein the base optionally has wheels  
10 attached, wherein at least one of the at least one door has a touch screen.

24. The method of claim 23 wherein the cabinet includes an angled containment  
floor that directs chemical to a drain pan.

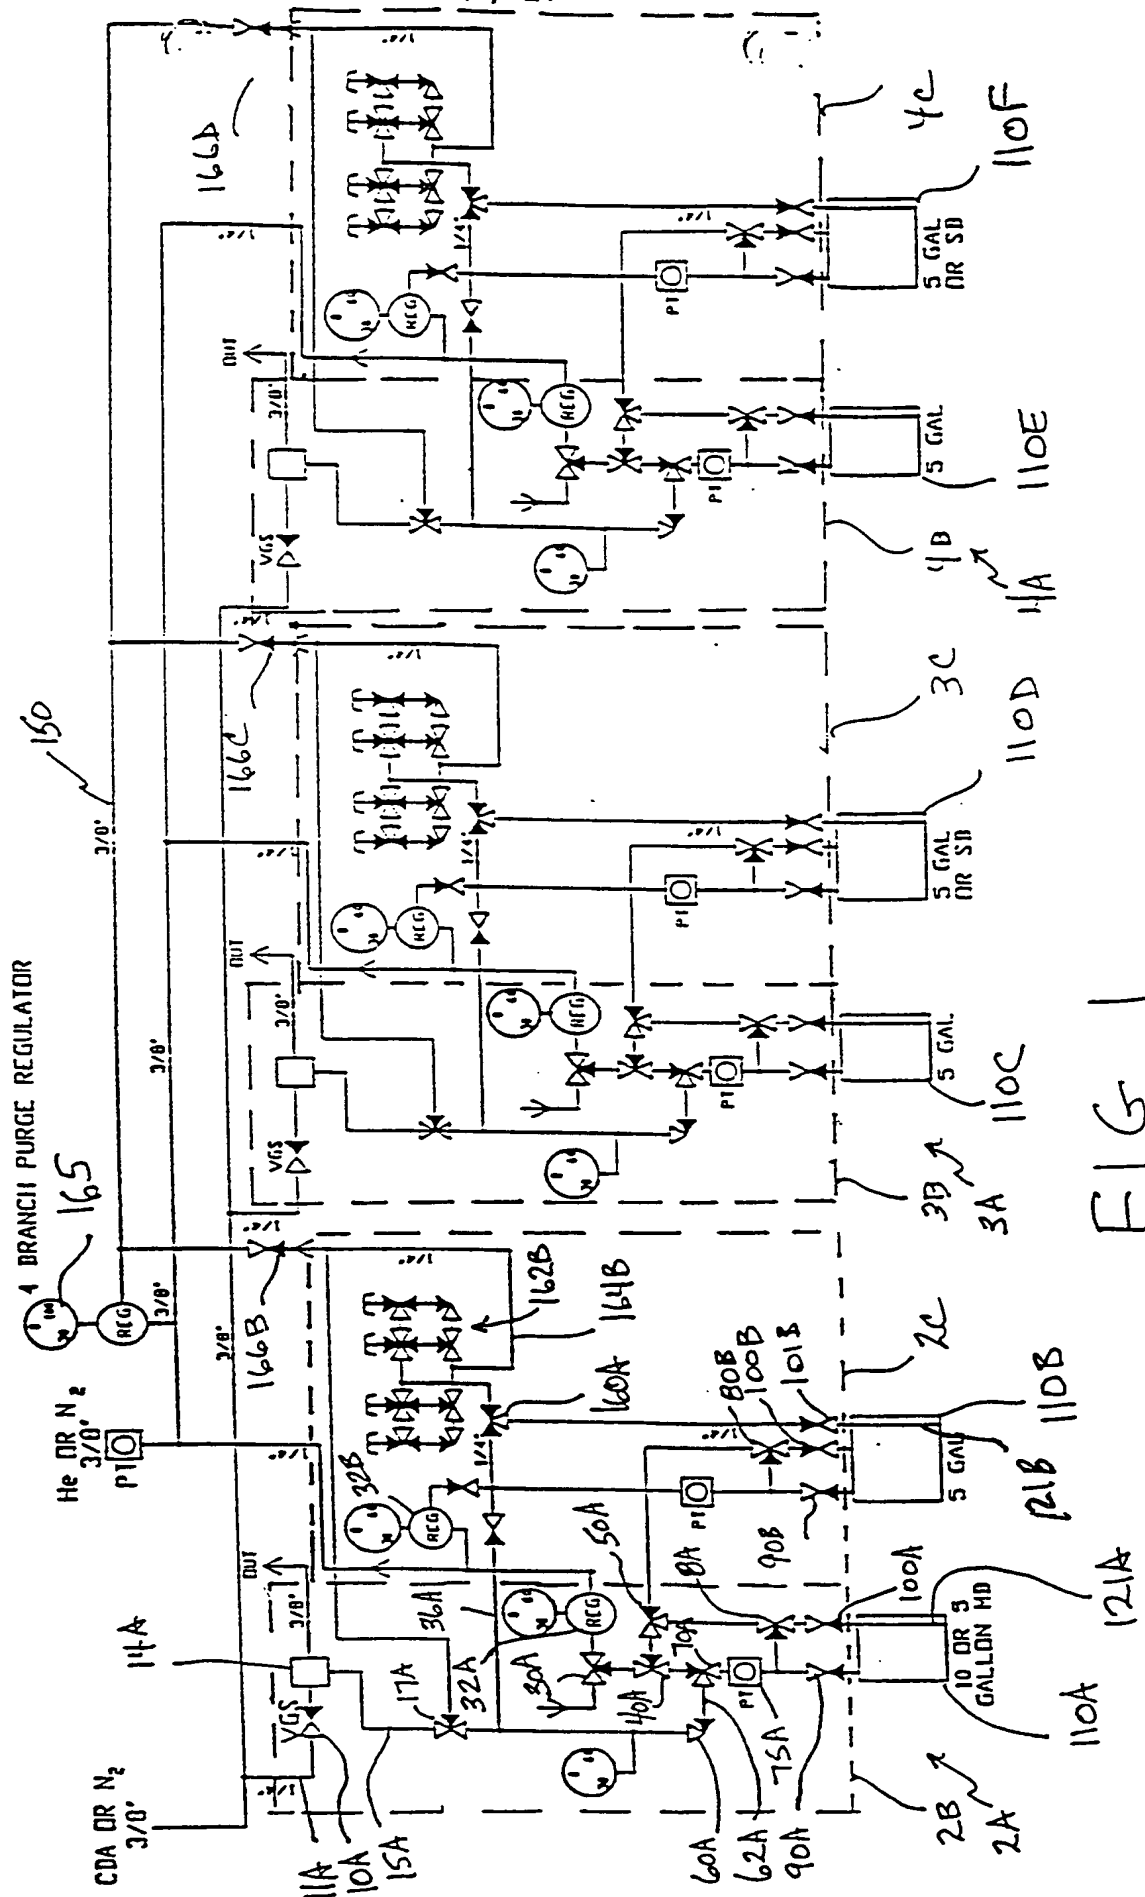

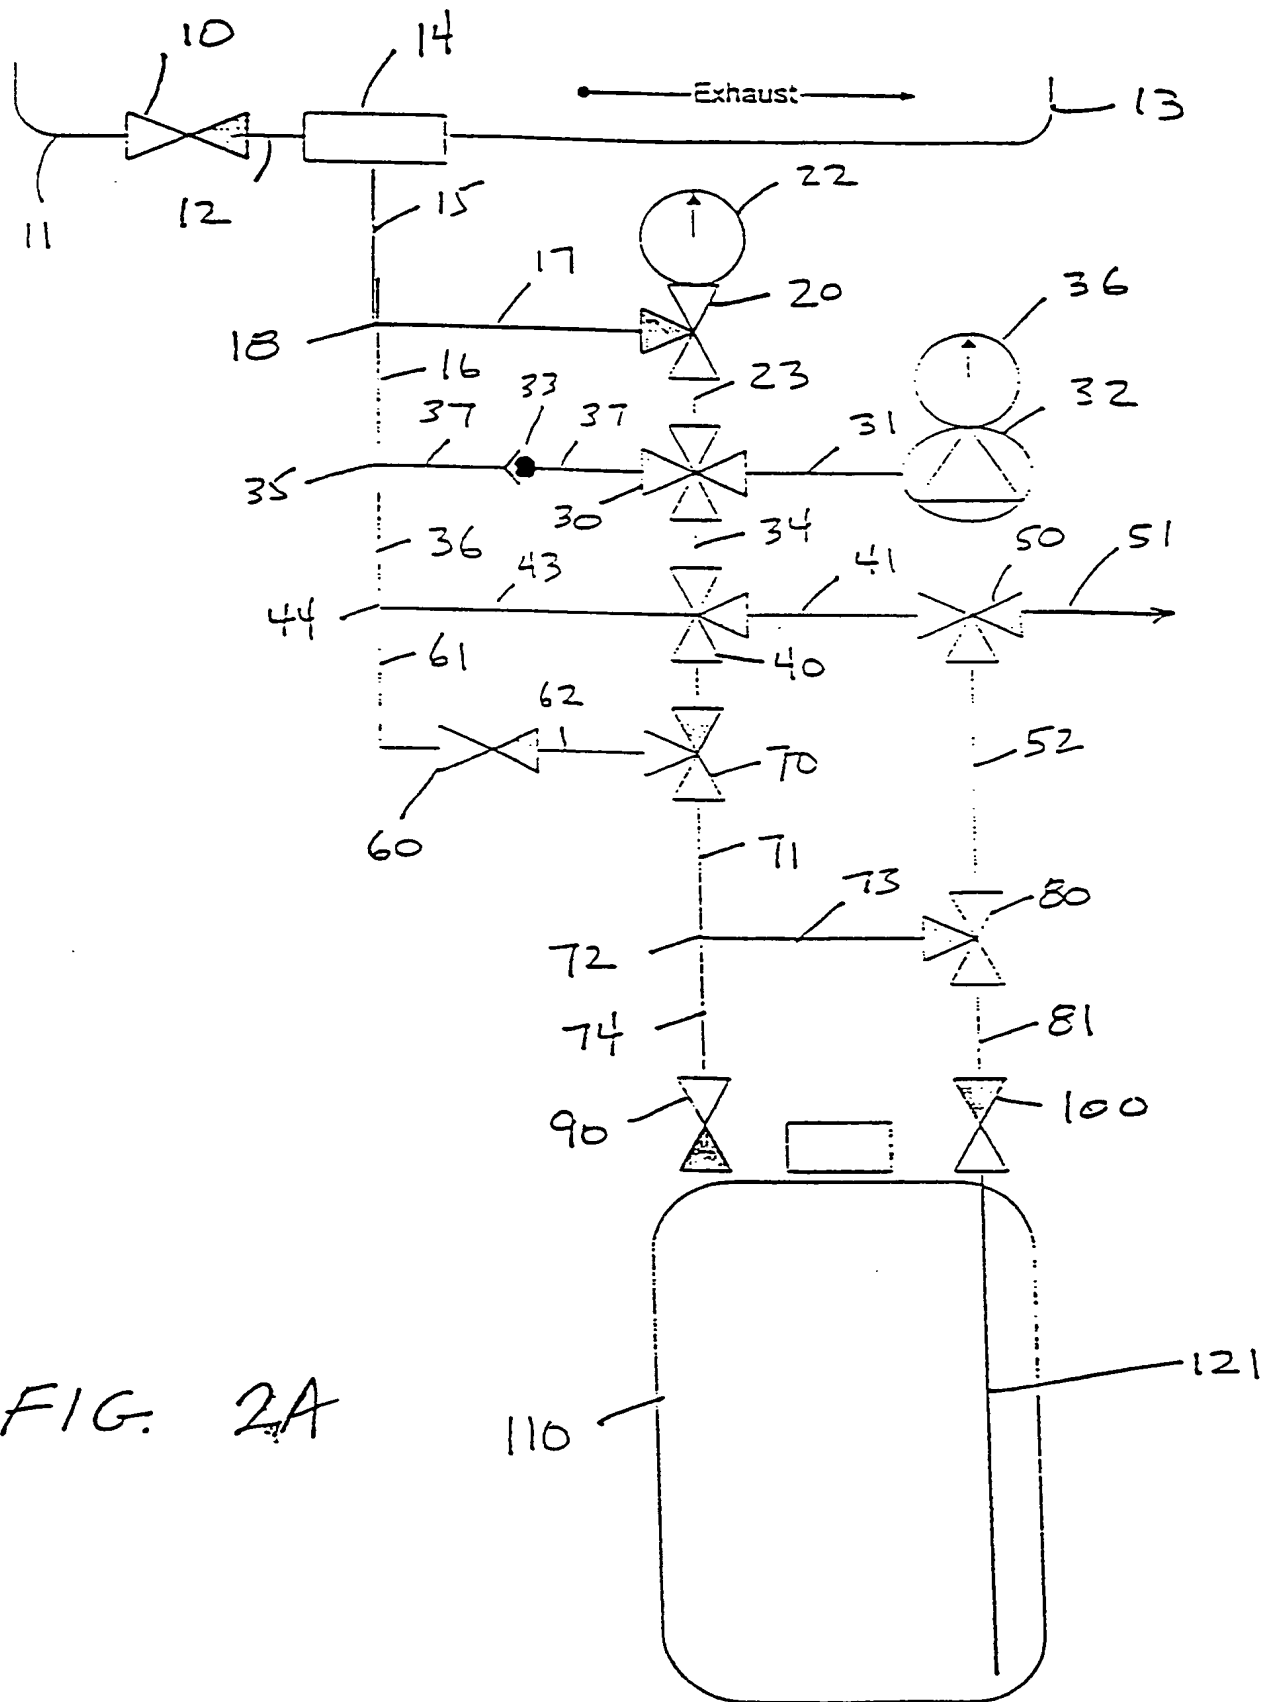

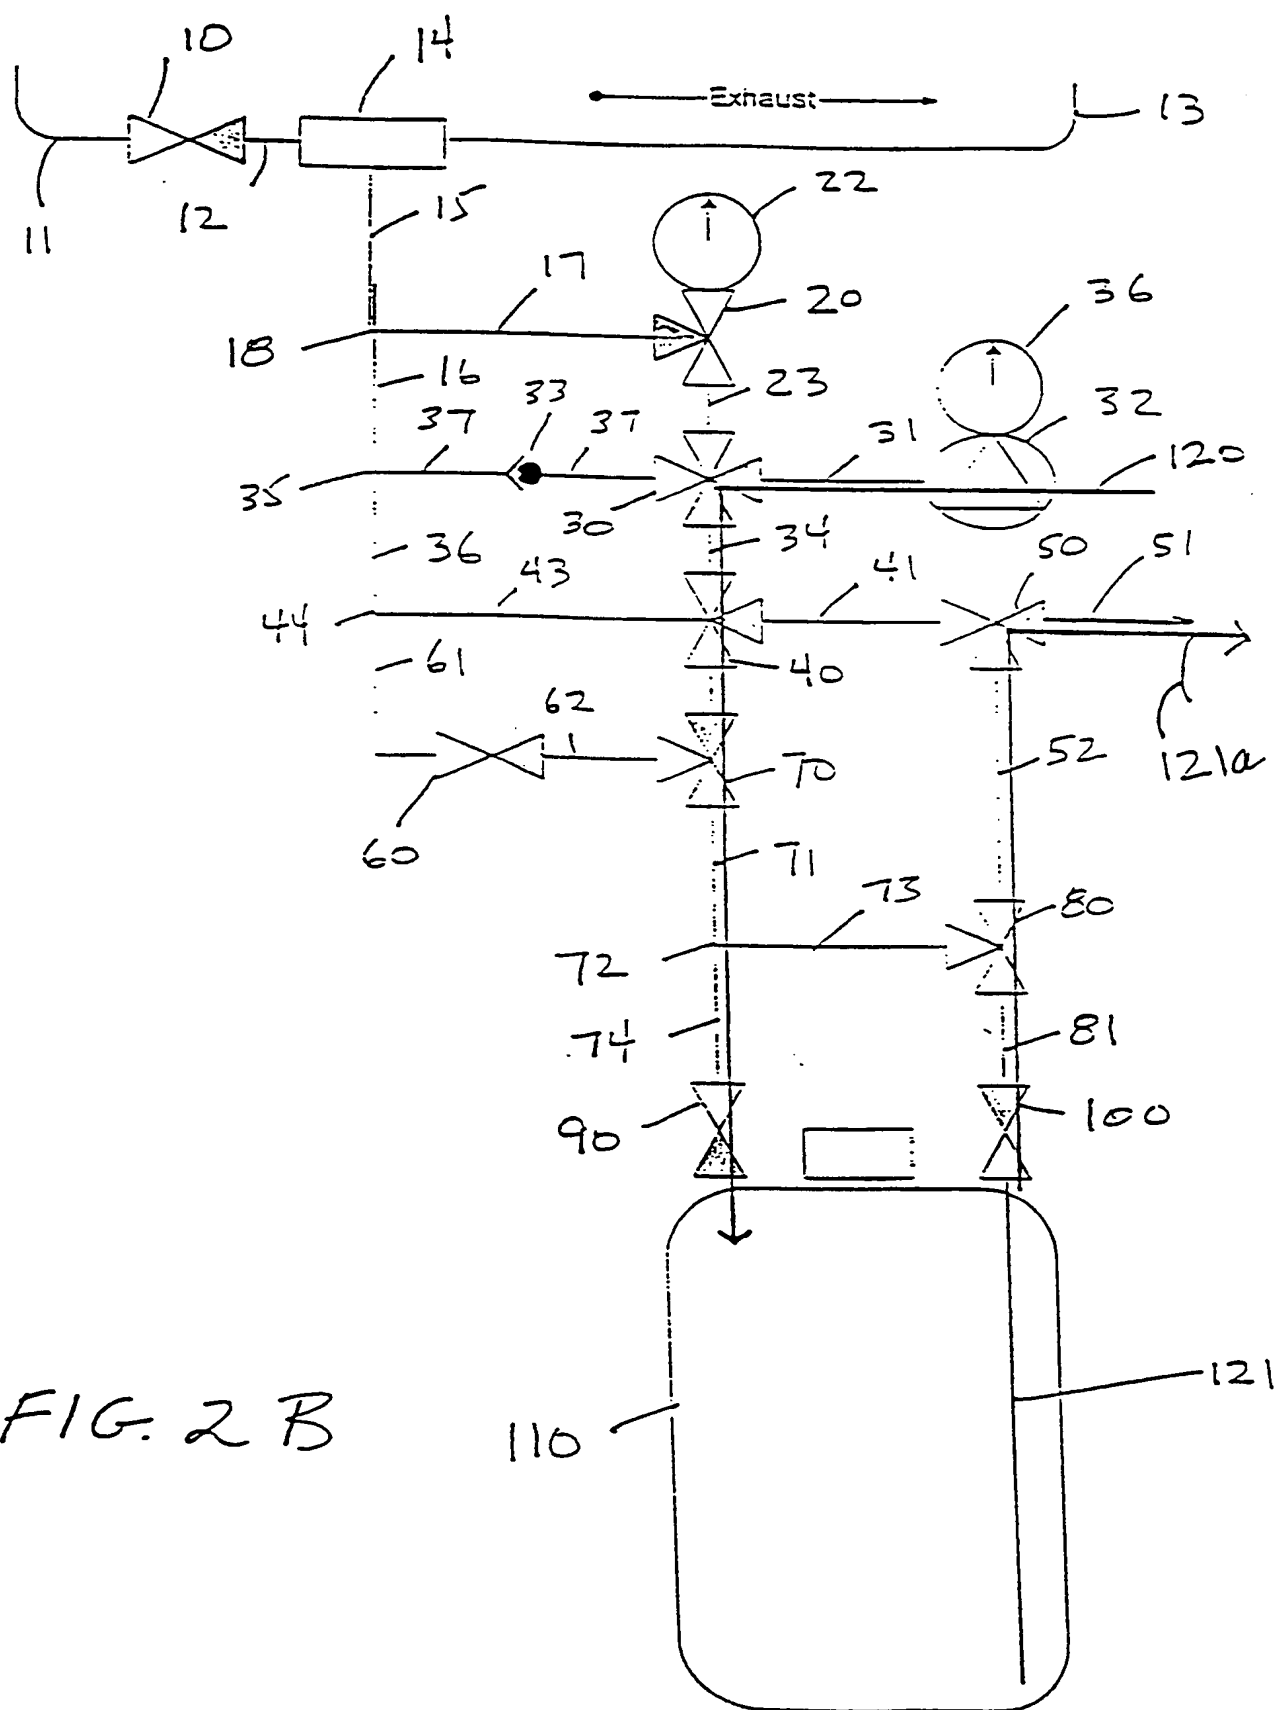


FIG. 2B

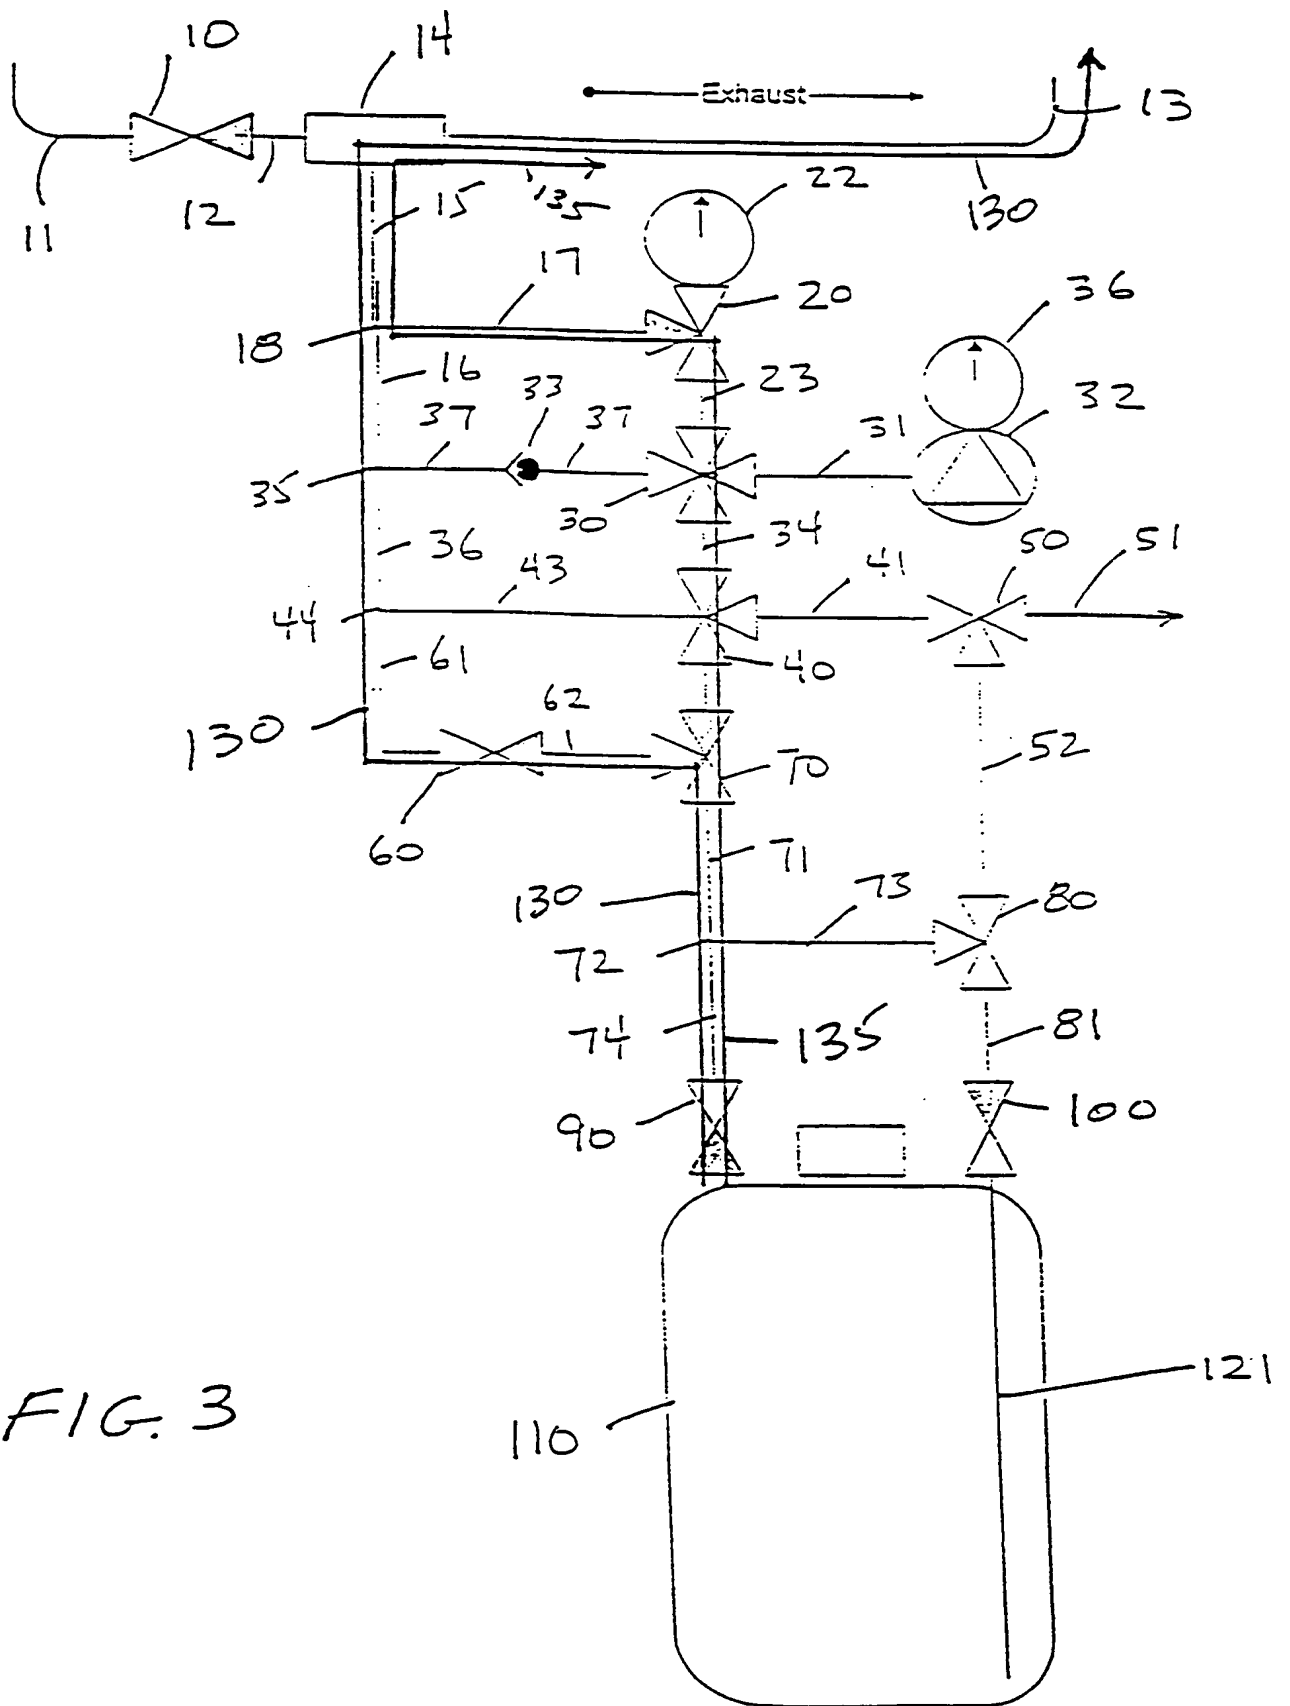


FIG. 3

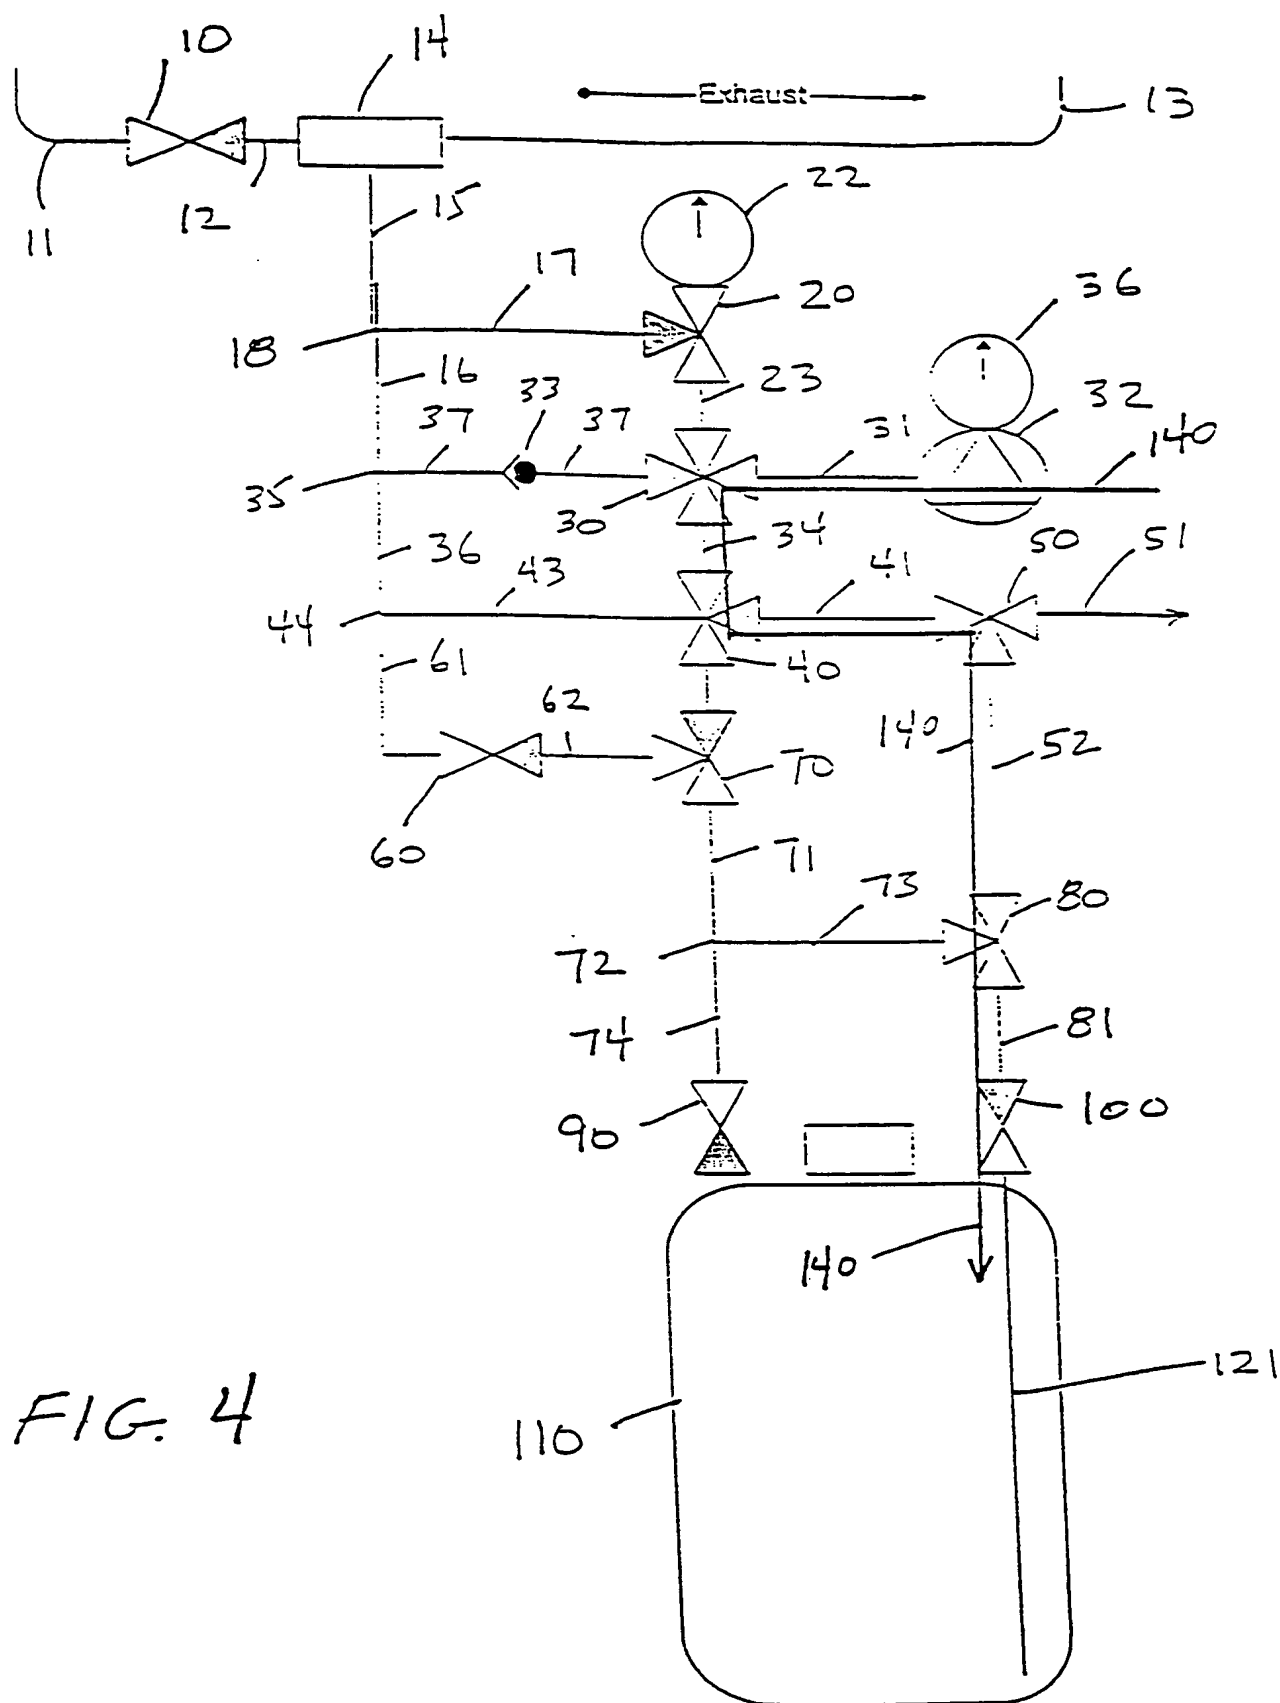


FIG. 4

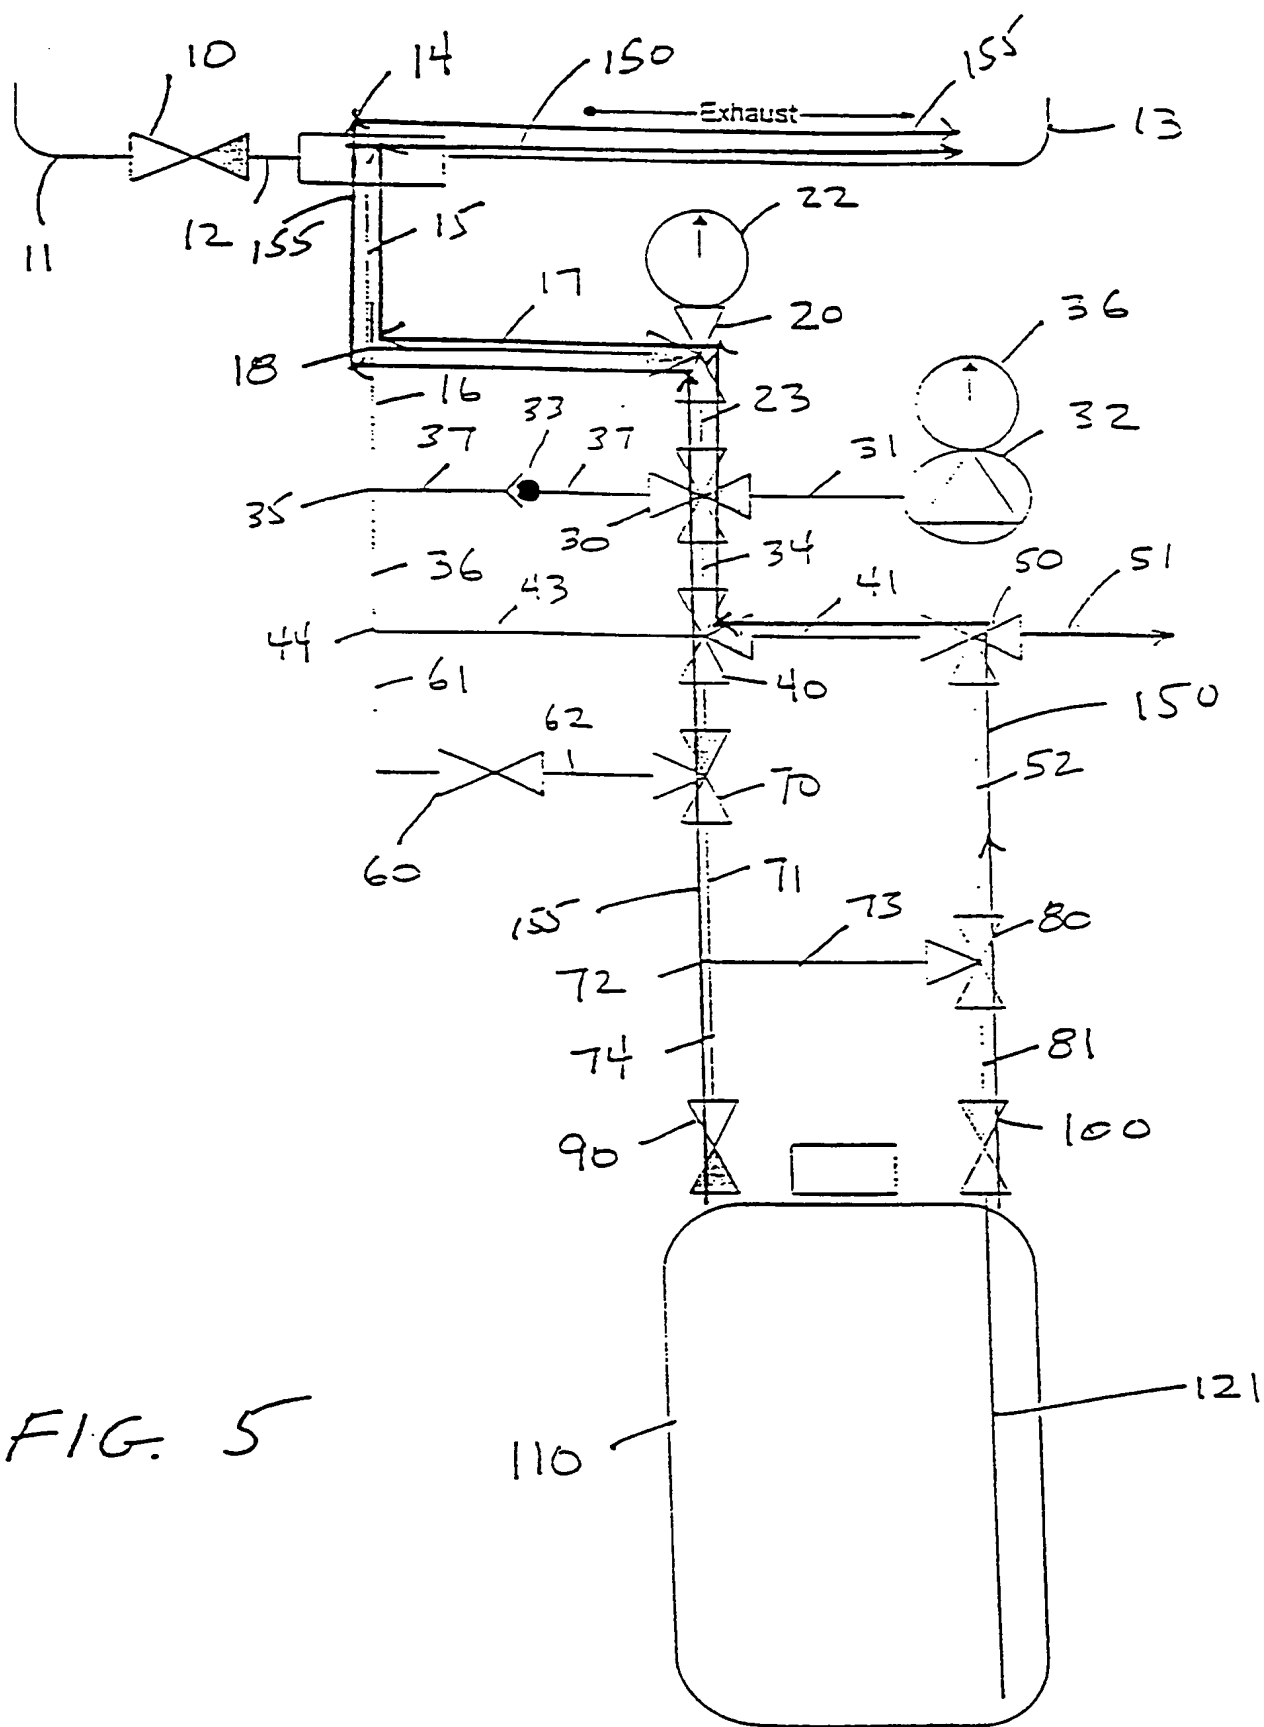
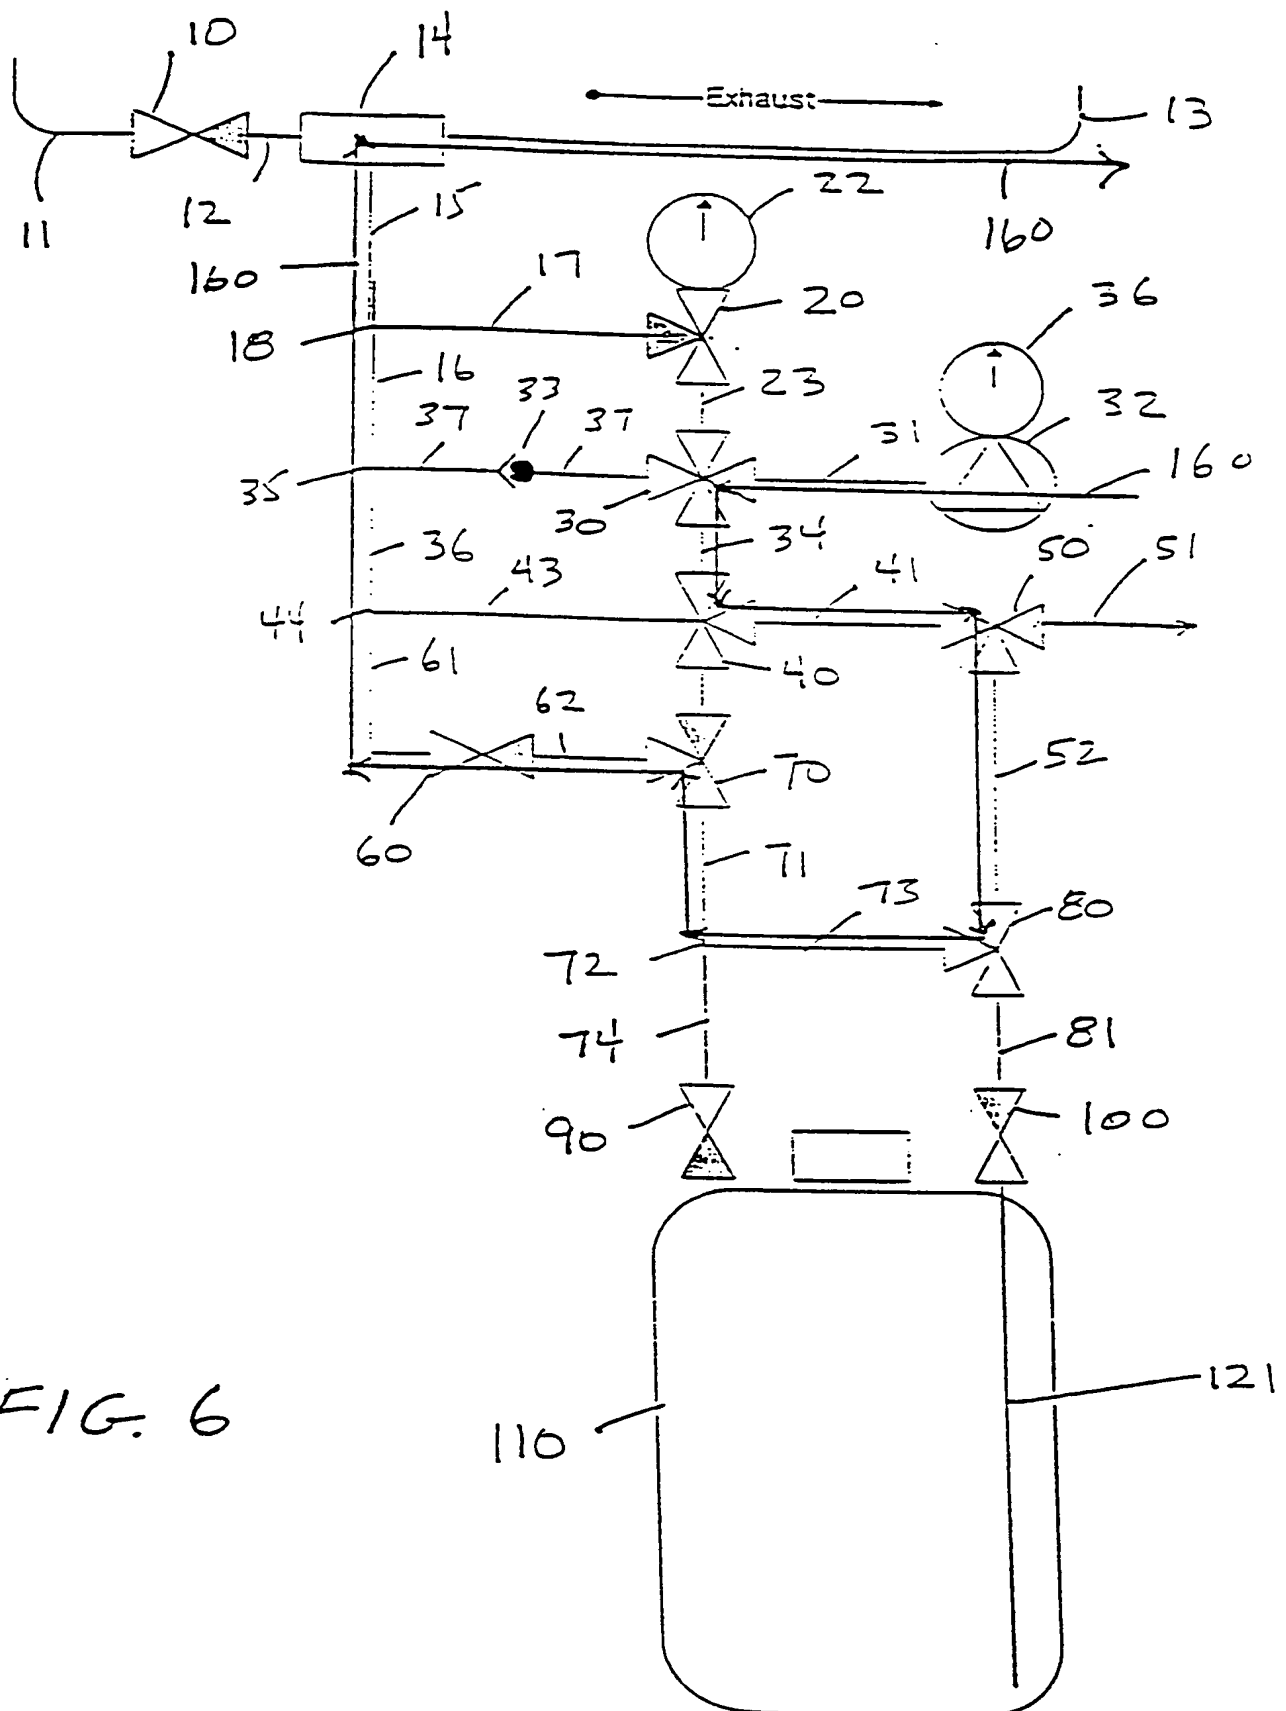
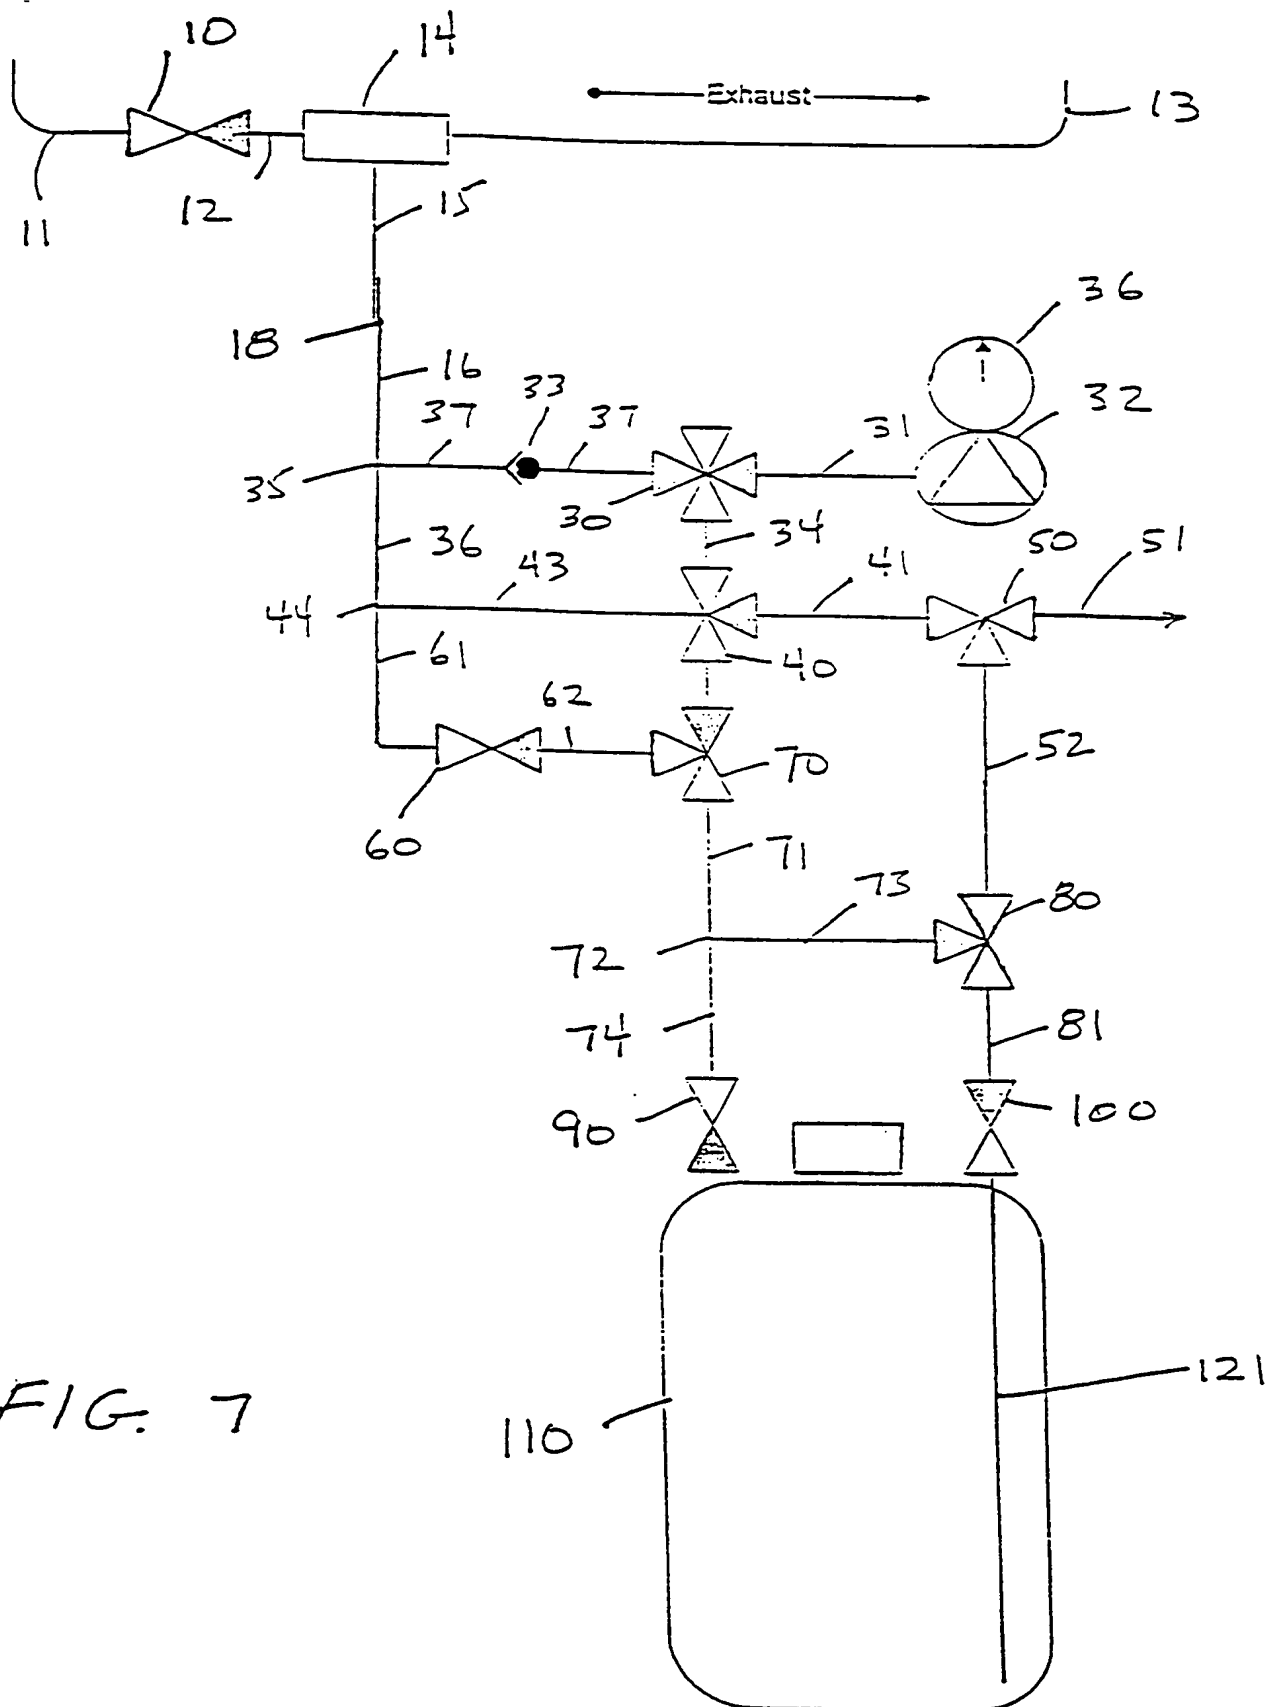
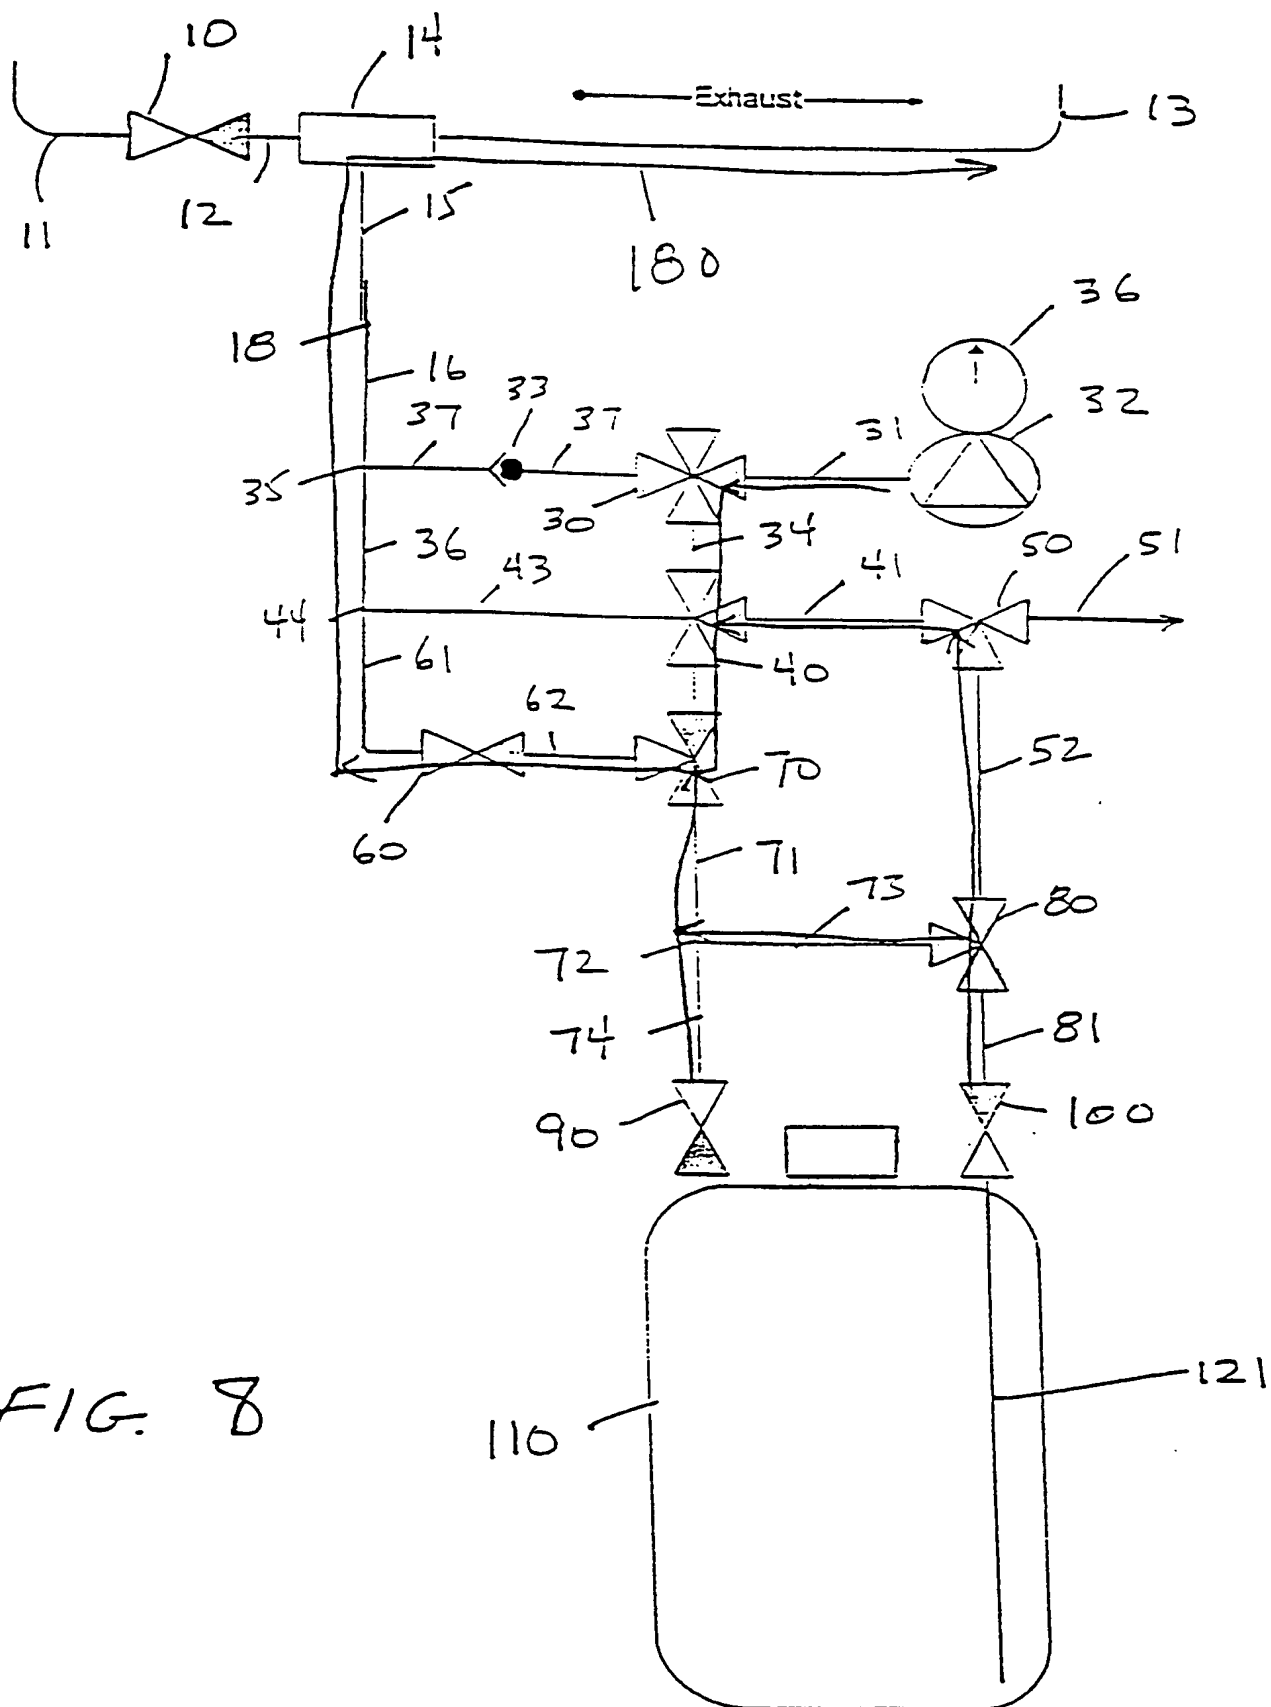



FIG. 5









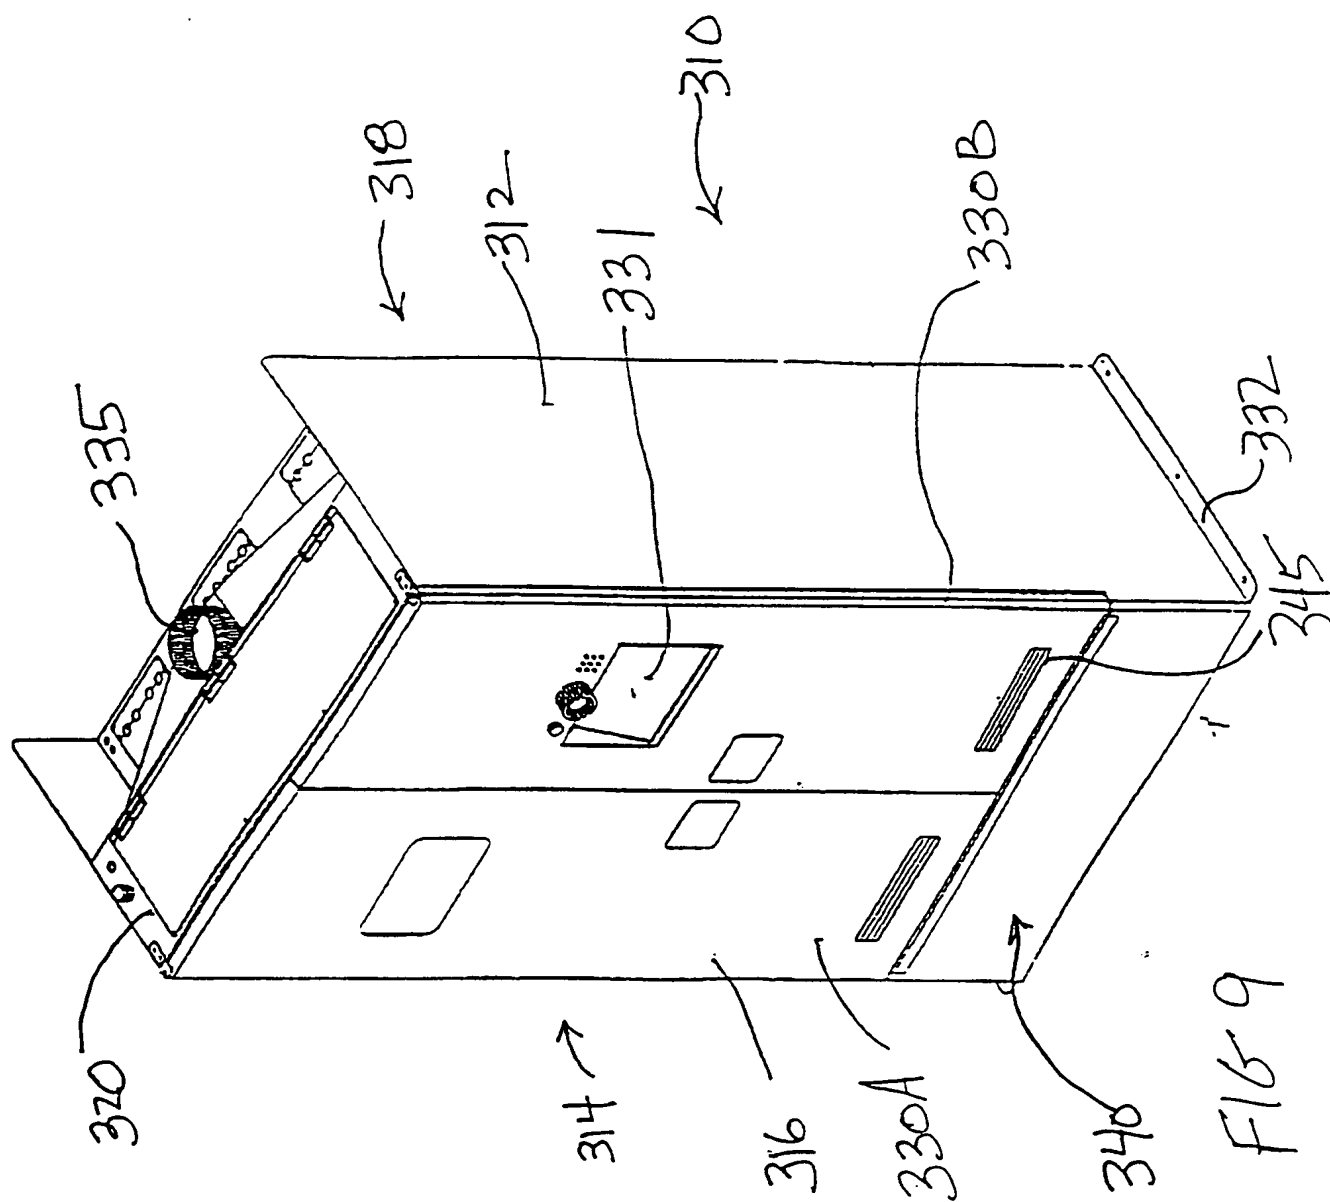

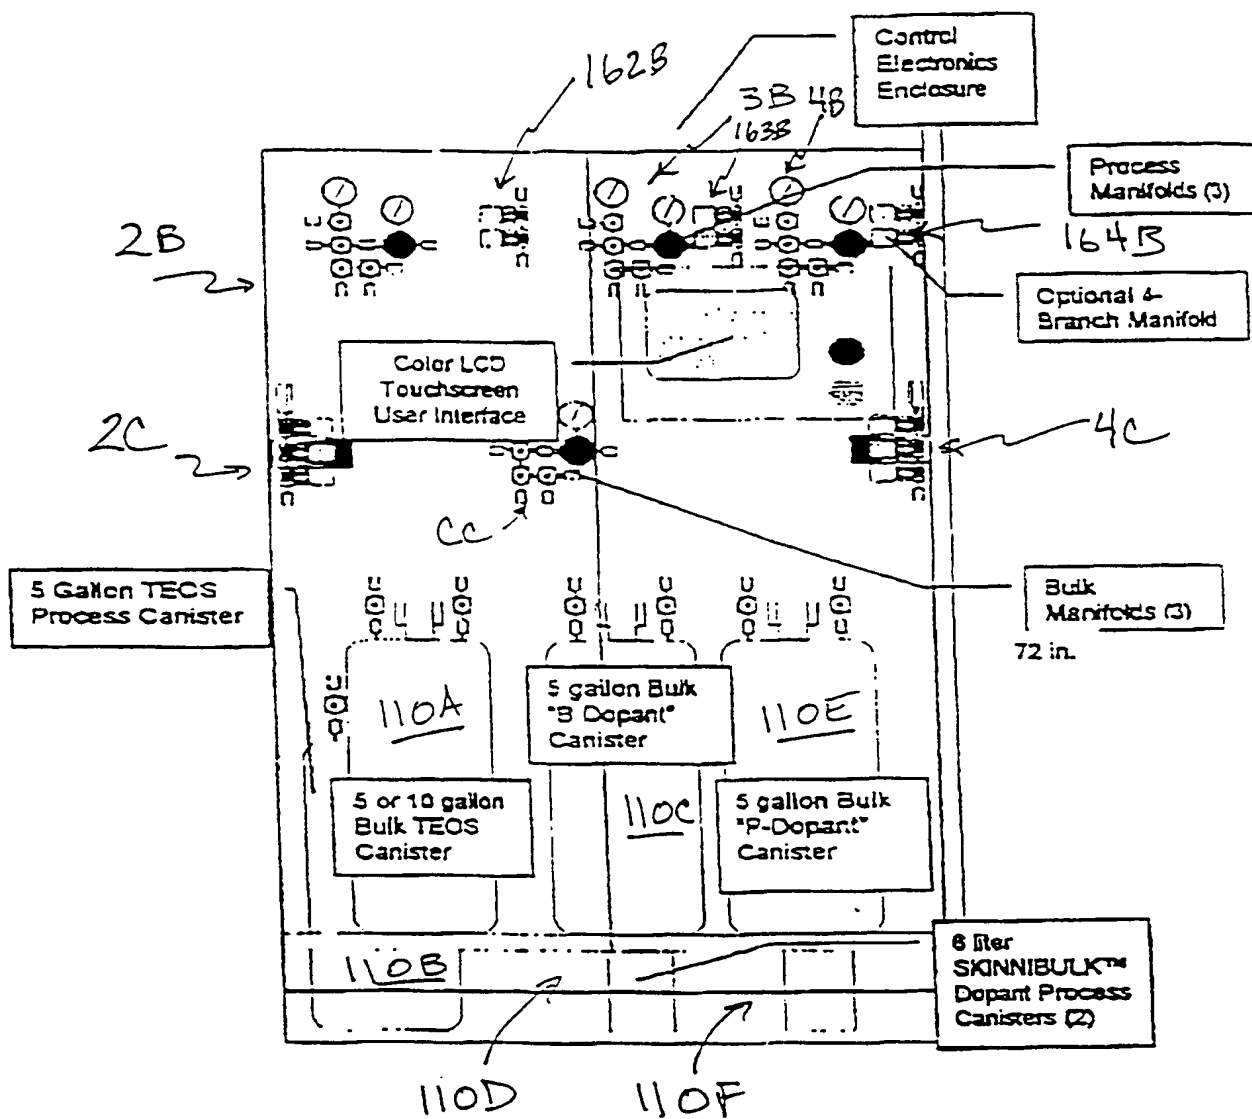
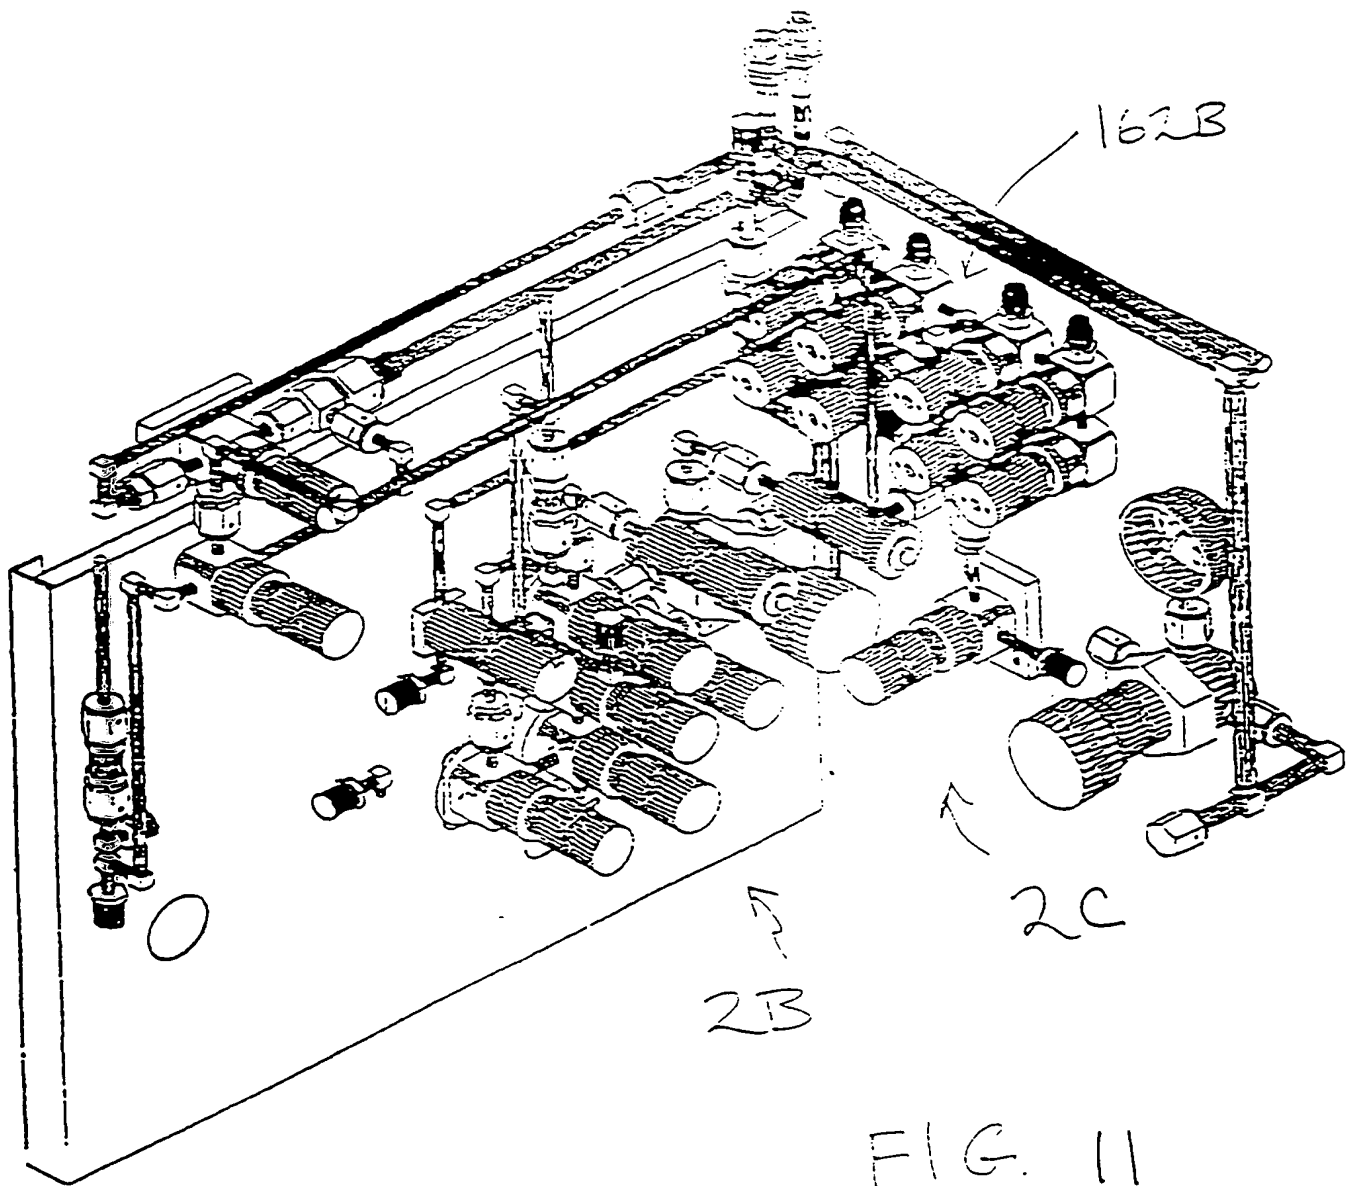


FIG. 10





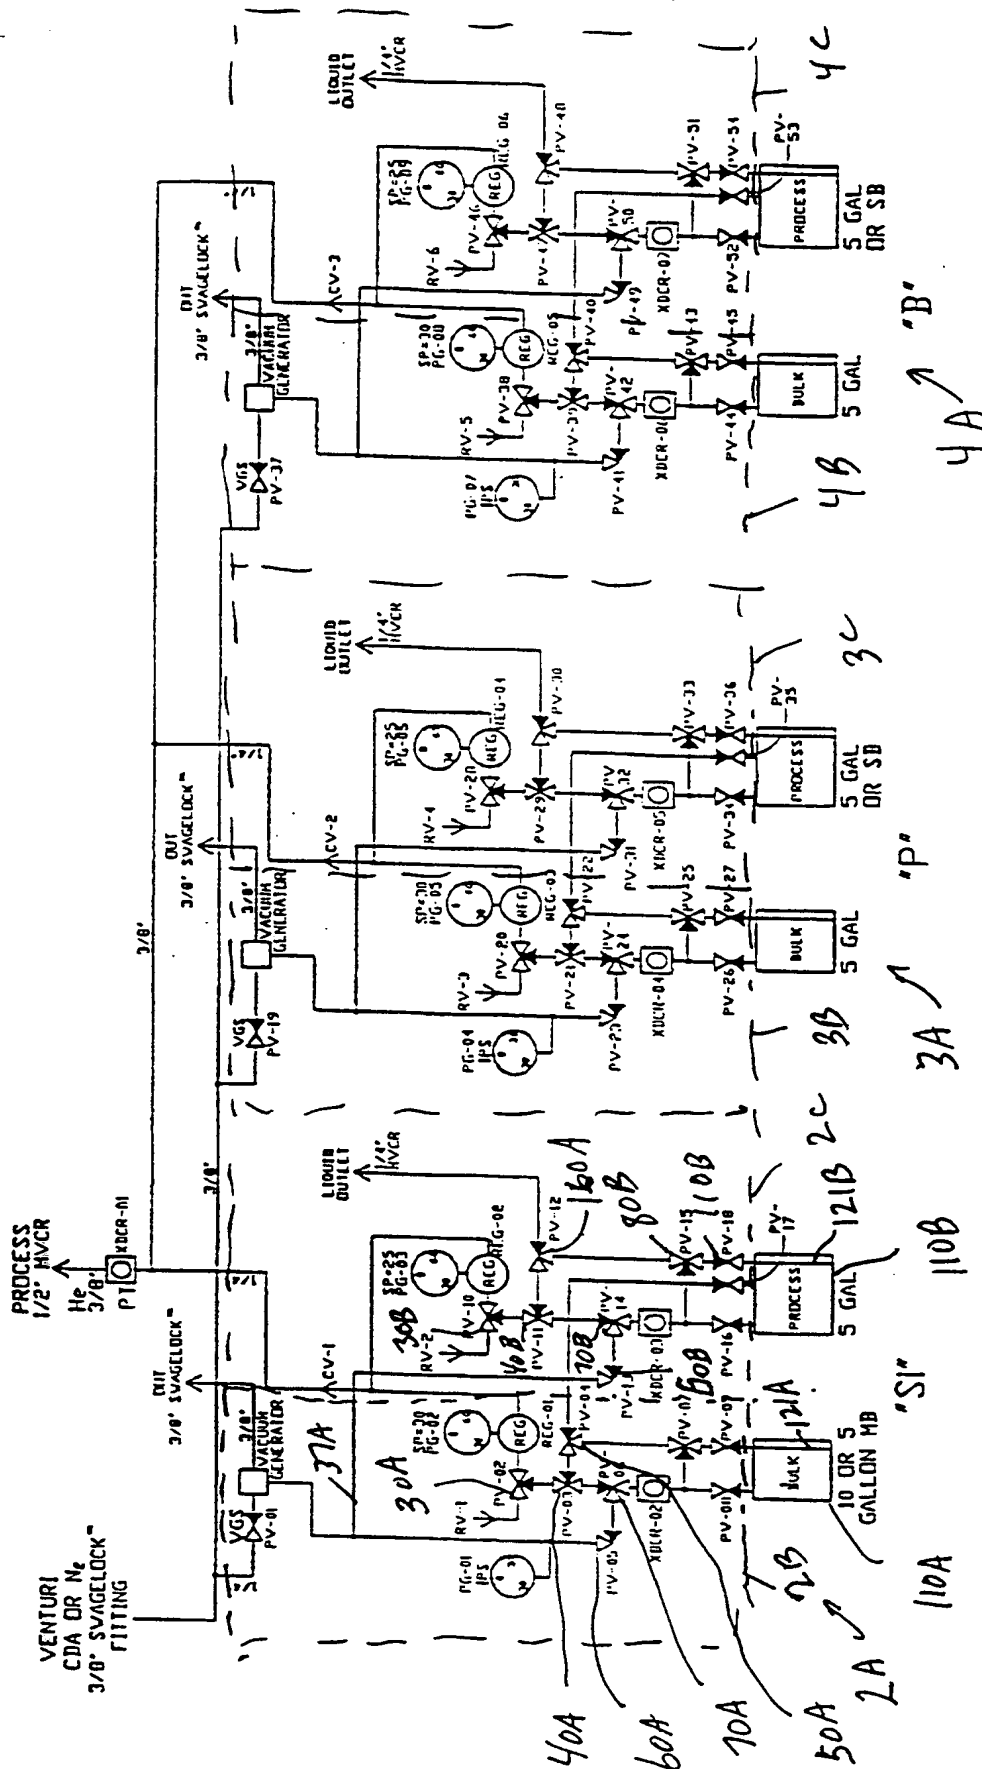


FIG. 12a



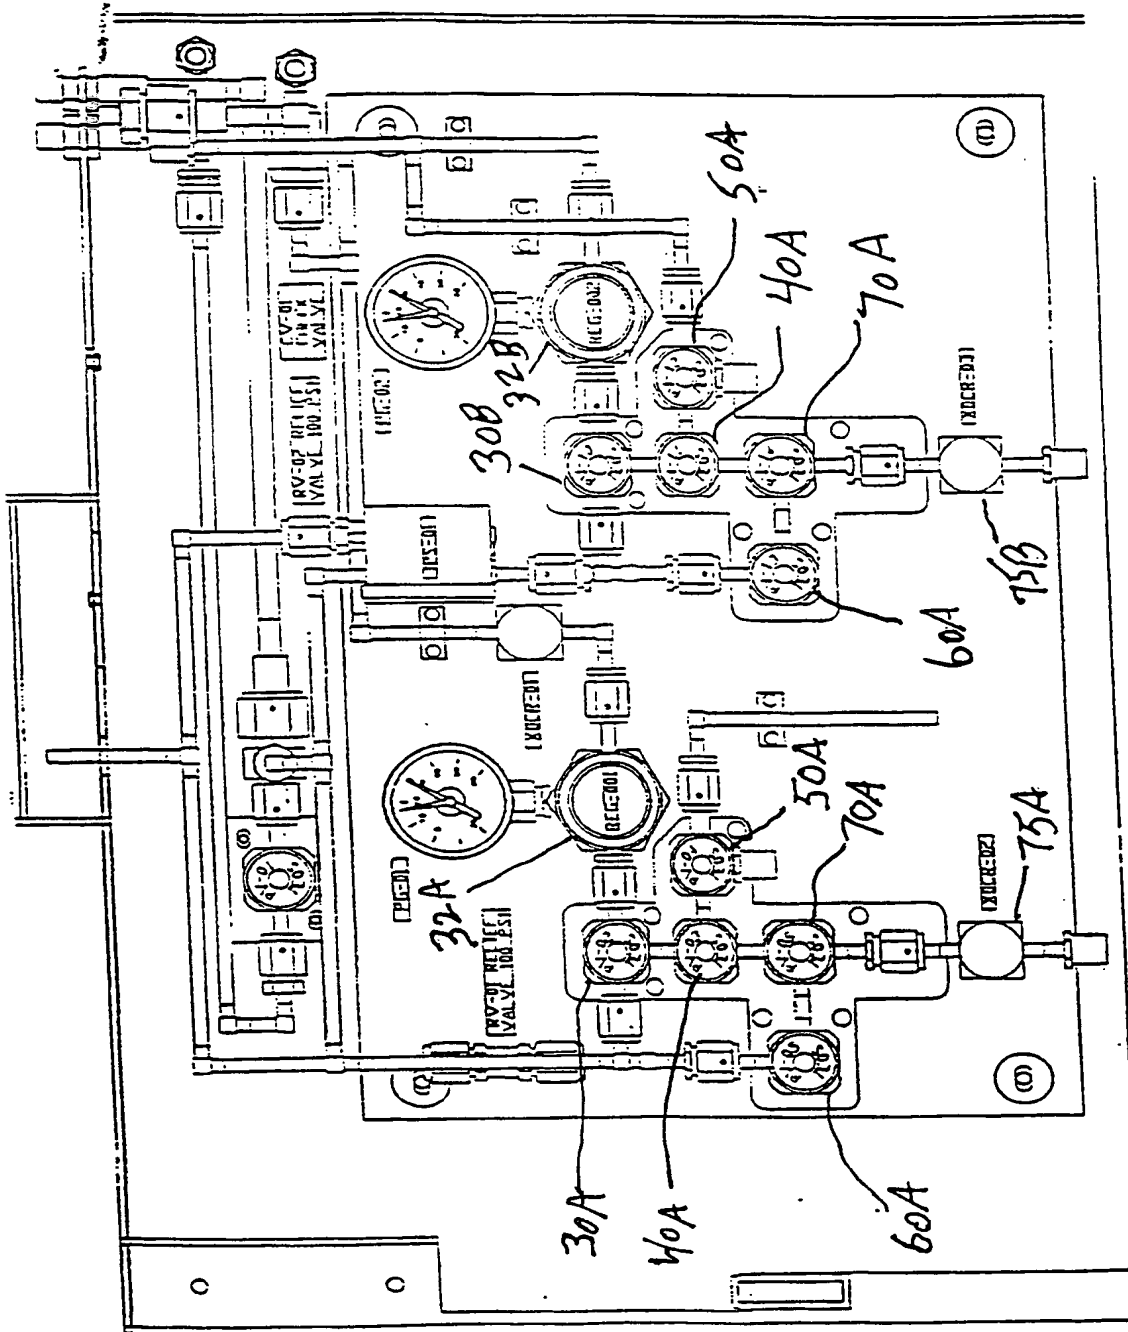


FIG. 13



FIG. 14a

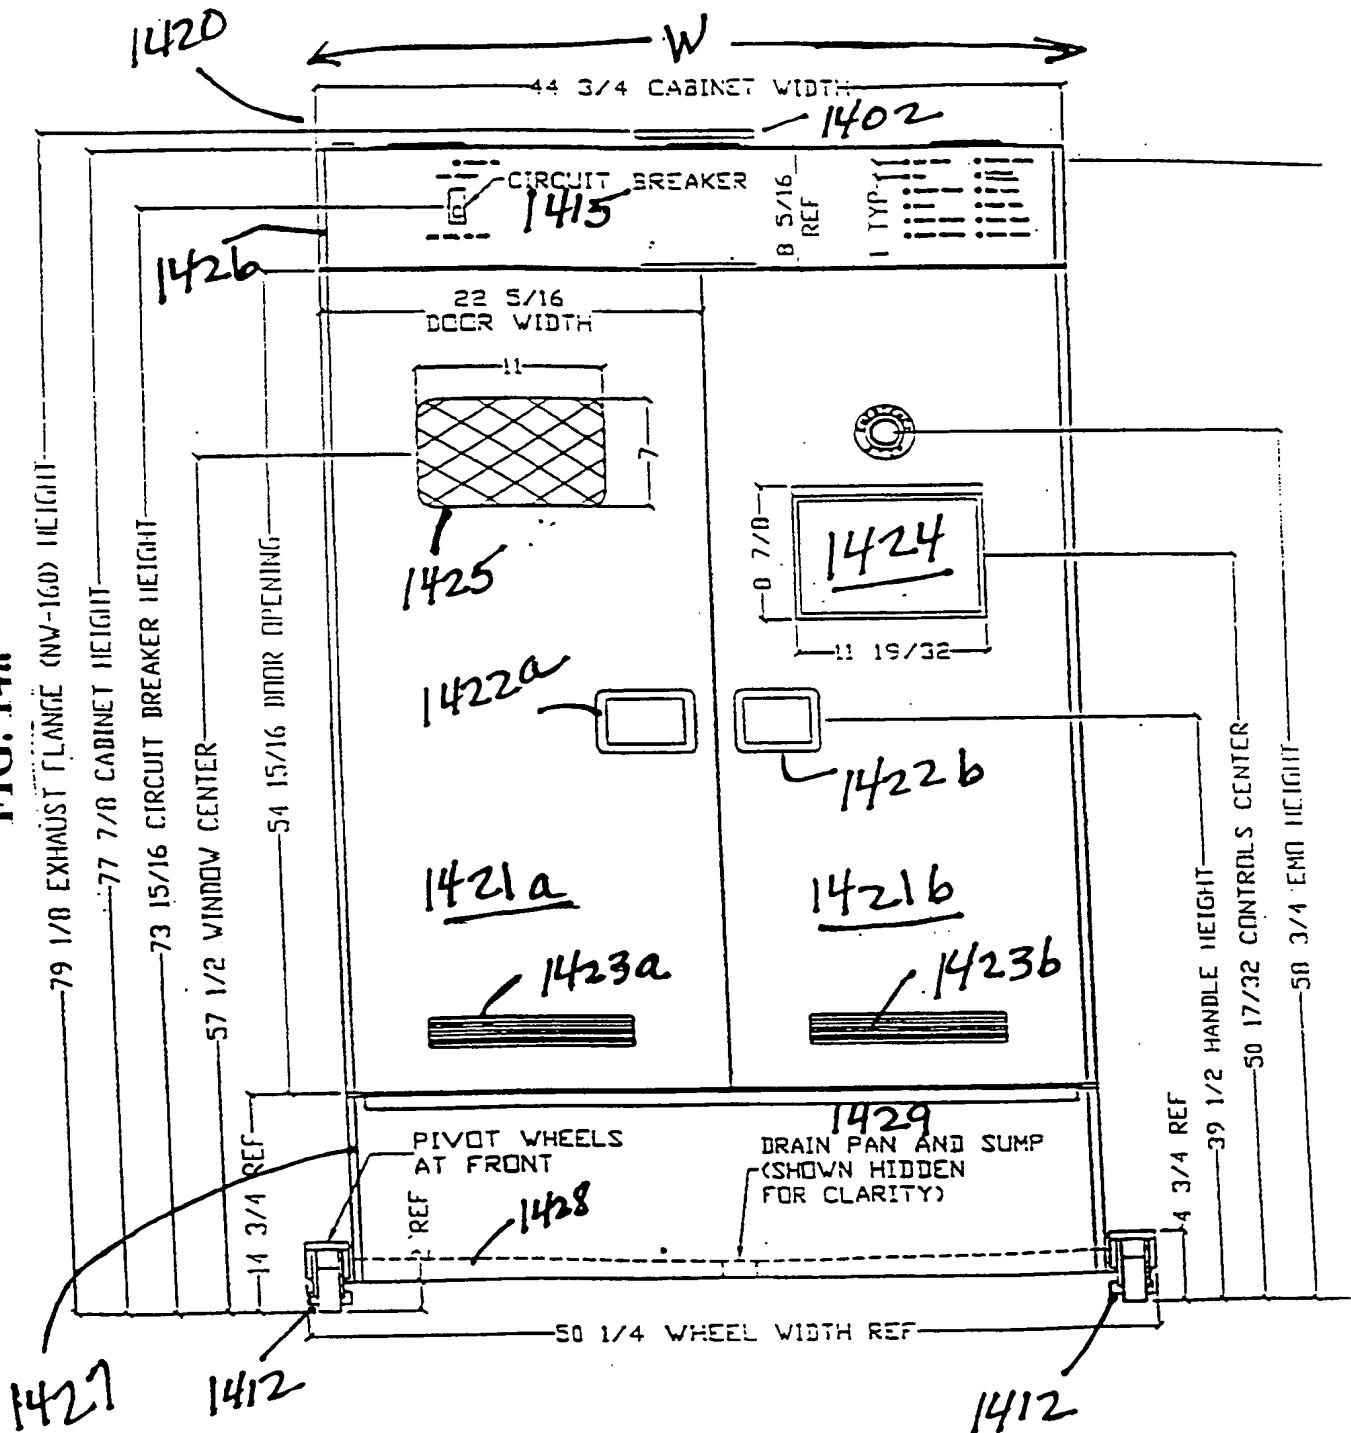
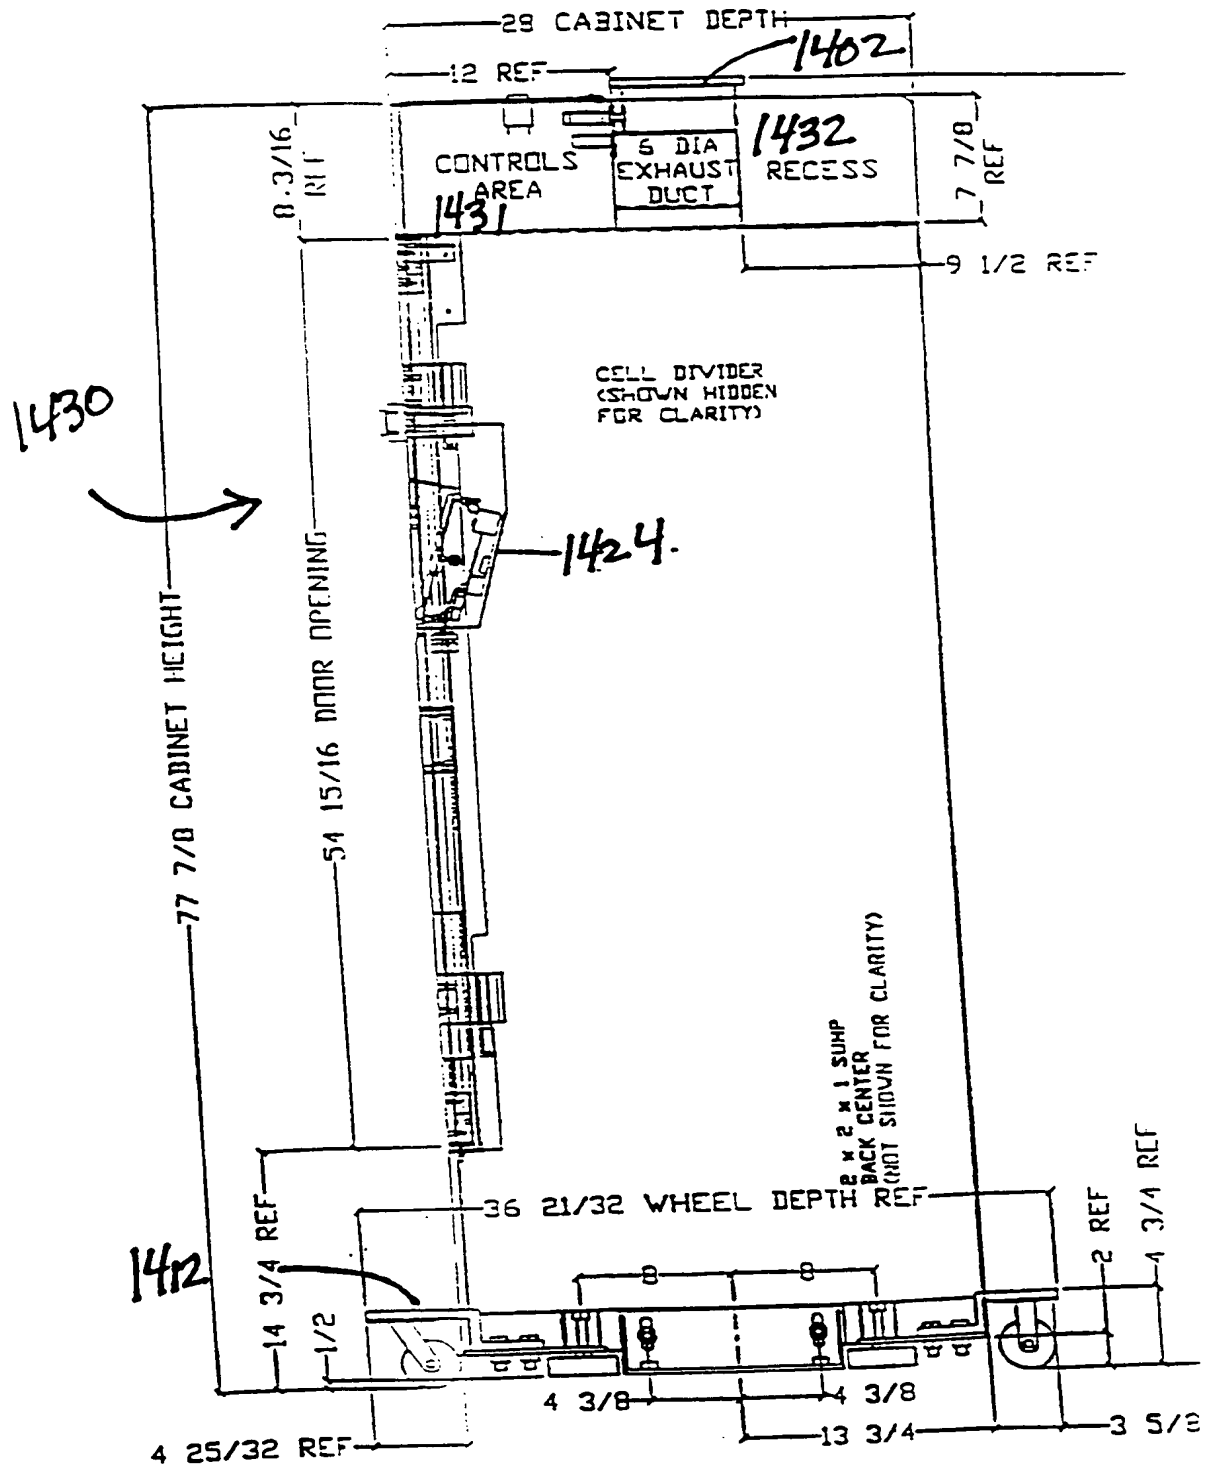


FIG. 14b



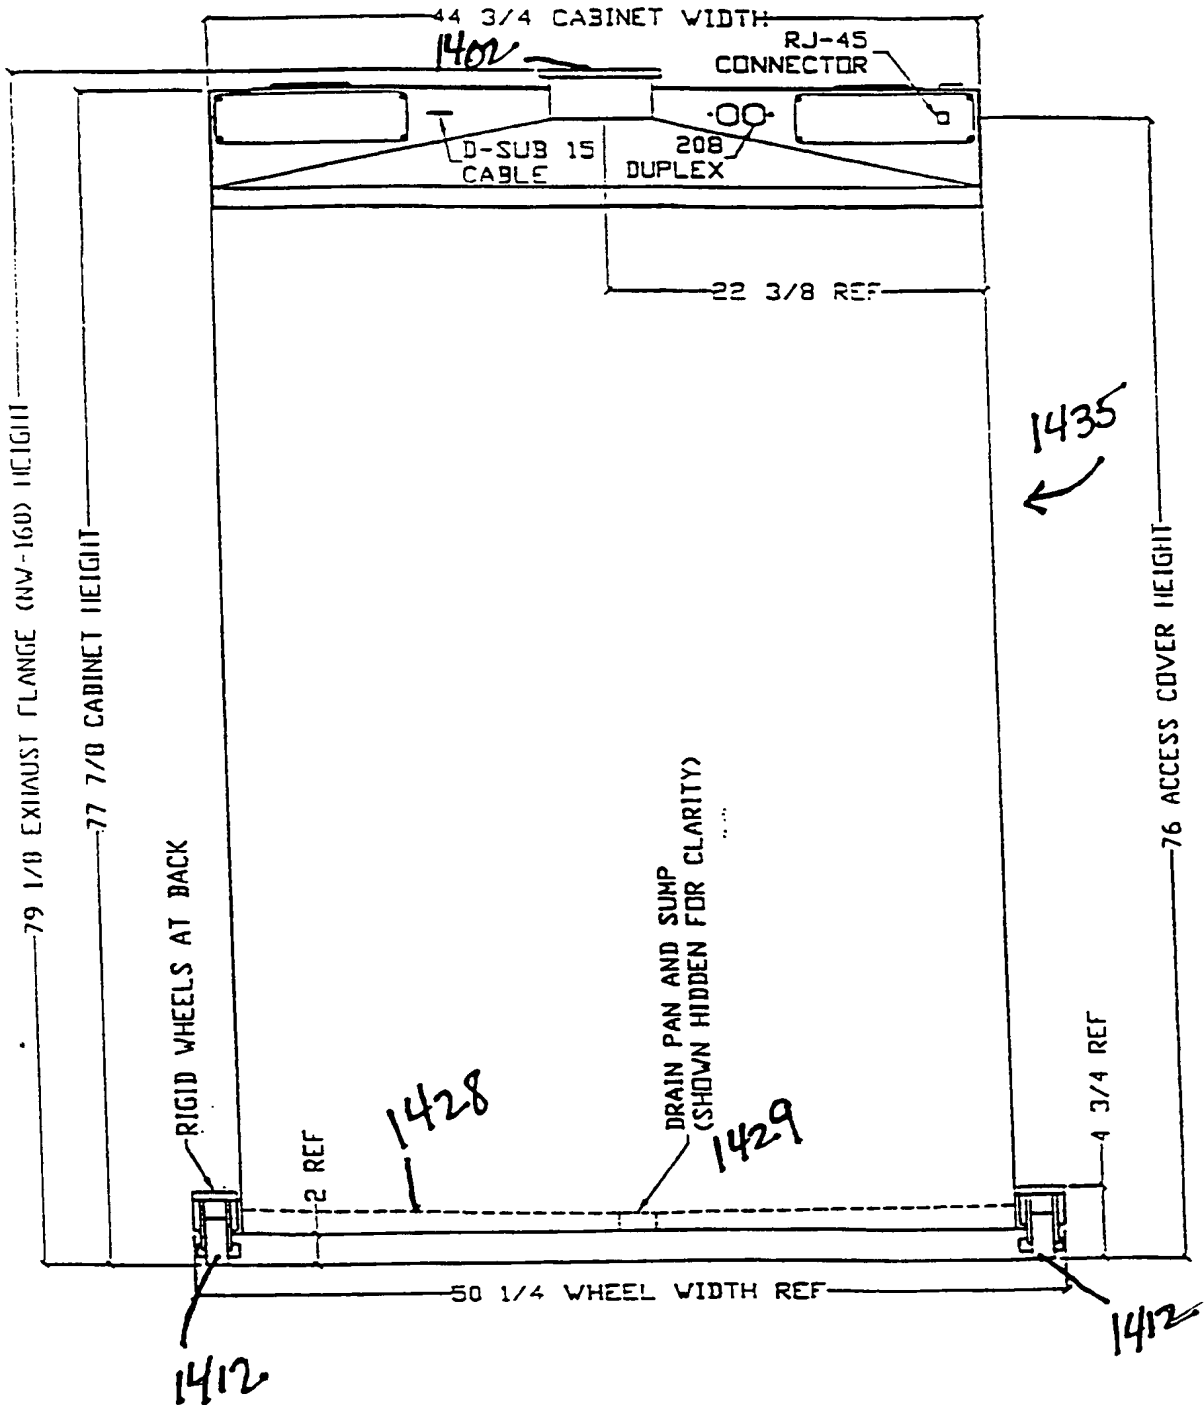
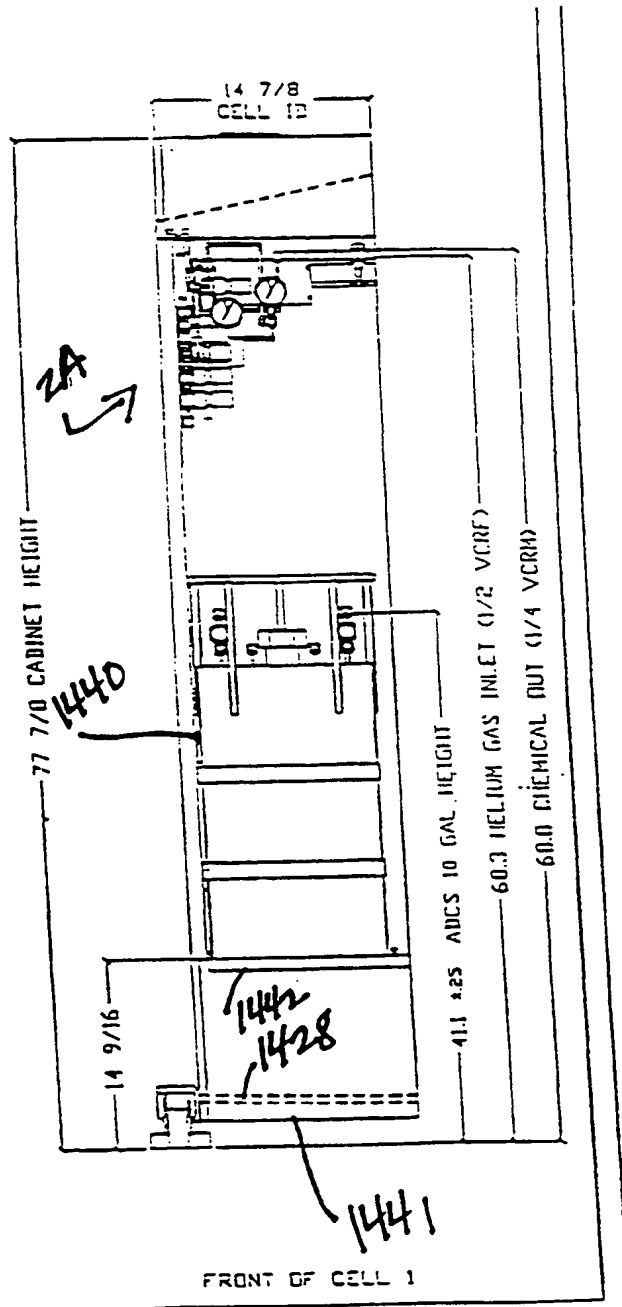


FIG. 14c

FIG. 149



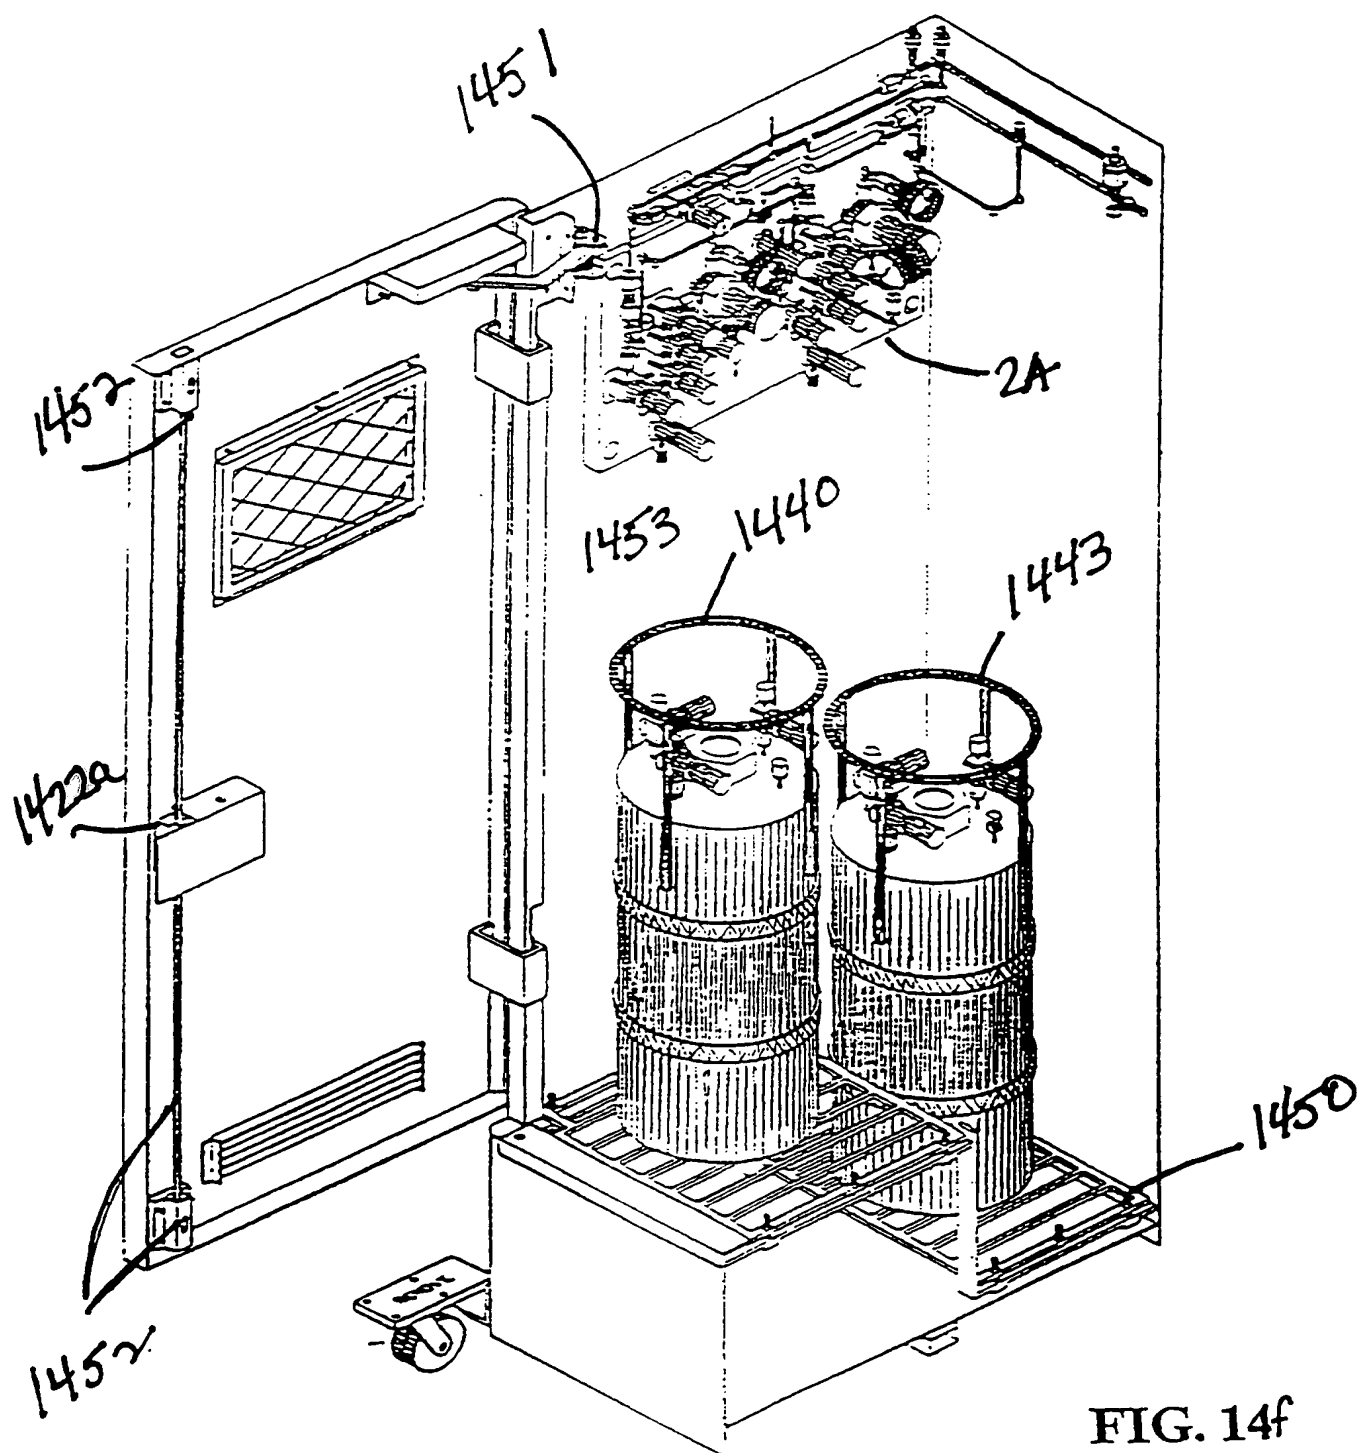


FIG. 14f

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/JS 99/14845

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 F17C13/04 F17C7/00

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F17C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 220 517 A (DUROSS RONALD R ET AL) 15 June 1993 (1993-06-15)	1-4, 7-11, 14-19, 22-24
Y	claims; figures 1,5,6,8	5,6,12, 13,20,21
Y	WO 95 20127 A (ADVANCED DELIVERY & CHEMICAL S) 27 July 1995 (1995-07-27) cited in the application claims; figure 37	5,6,12, 13,20,21
P,X	WO 99 02251 A (ESSER CRAIG ;GREGG JOHN N (US); NOAH CRAIG M (US); ADVANCED DELIVE) 21 January 1999 (1999-01-21) cited in the application page 9, line 26 -page 10, line 6; claims; figures	1-21

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

14 October 1999

Date of mailing of the international search report

22/10/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Meertens, J



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/14845

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5220517	A	15-06-1993	CA 2050247 A,C	01-03-1992
			CA 2165847 A,C	01-03-1992
			CA 2194855 A	01-03-1992
			US 5329463 A	12-07-1994
			US 5508947 A	16-04-1996
			US 5497316 A	05-03-1996
			US 5657254 A	12-08-1997
WO 9520127	A	27-07-1995	US 5607002 A	04-03-1997
			EP 0740757 A	06-11-1996
			JP 9508208 T	19-08-1997
			US 5590695 A	07-01-1997
			US 5562132 A	08-10-1996
			US 5711354 A	27-01-1998
			US 5878793 A	09-03-1999
WO 9902251	A	21-01-1999	AU 8481798 A	08-02-1999

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : F17C 13/04, 7/00	A1	(11) International Publication Number: WO 00/00767 (43) International Publication Date: 6 January 2000 (06.01.00)
--	----	--

(21) International Application Number: PCT/US99/14845

(22) International Filing Date: 30 June 1999 (30.06.99)

(30) Priority Data:  
60/091,191 30 June 1998 (30.06.98) US

(71) Applicant (for all designated States except US): ADCS, LTD.  
[US/US]; Suite 330, 6805 Capital of Texas Highway, Austin,  
TX 78731 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): NOAH, Craig, M.  
[US/US]; 881 San Ardo Way, Mountain View, CA 94043  
(US). GREGG, John, N. [US/US]; 100 5th Street, Marble  
Falls, TX 78611 (US).


(74) Agent: O'KEEFE, Robert, M.; Jones, O'Keefe, Egan &  
Peterman, Building C, Suite 200, 1101 Capital of Texas  
Highway South, Austin, TX 78746 (US).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG,  
BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB,  
GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG,  
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK,  
MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI,  
SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA,  
ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ,  
UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD,  
RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK,  
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI  
patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR,  
NE, SN, TD, TG).

Published

With international search report.

(54) Title: SYSTEM FOR SUPPLY OF MULTIPLE CHEMICALS TO A PROCESS TOOL

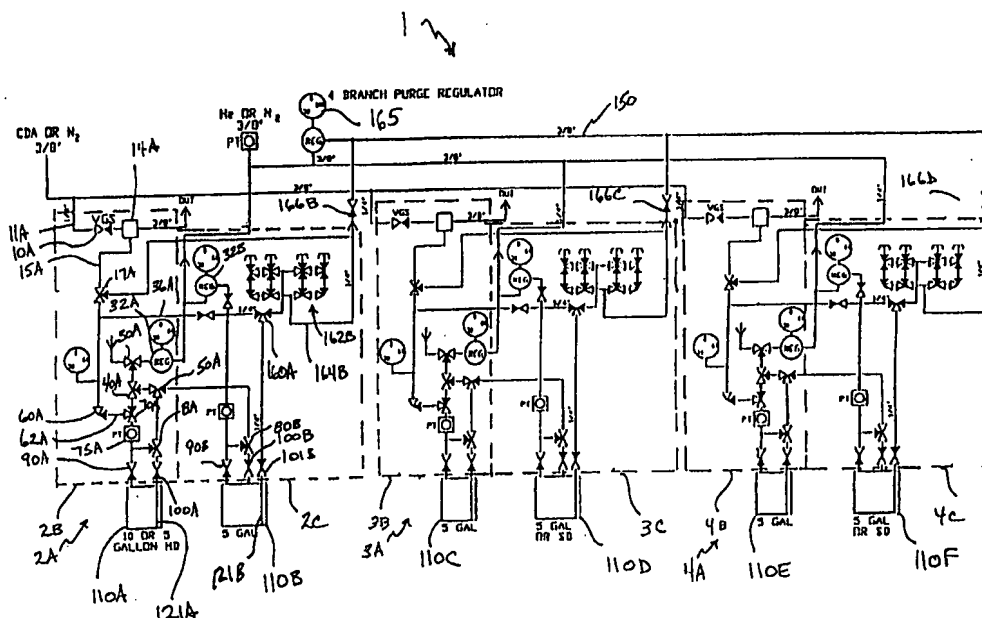

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/14845

**A. CLASSIFICATION OF SUBJECT MATTER**  
 IPC 7 F17C13/04 F17C7/00

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F17C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 220 517 A (DUROSS RONALD R ET AL) 15 June 1993 (1993-06-15)	1-4, 7-11, 14-19, 22-24
Y	claims; figures 1,5,6,8	5,6,12, 13,20,21
Y	WO 95 20127 A (ADVANCED DELIVERY & CHEMICAL S) 27 July 1995 (1995-07-27) cited in the application claims; figure 37	5,6,12, 13,20,21
P,X	WO 99 02251 A (ESSER CRAIG ;GREGG JOHN N (US); NOAH CRAIG M (US); ADVANCED DELIVE) 21 January 1999 (1999-01-21) cited in the application page 9, line 26 -page 10, line 6; claims; figures	1-21



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

14 October 1999

Date of mailing of the international search report

22/10/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Meertens, J

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/14845


Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5220517 A	15-06-1993	CA 2050247 A,C	01-03-1992
		CA 2165847 A,C	01-03-1992
		CA 2194855 A	01-03-1992
		US 5329463 A	12-07-1994
		US 5508947 A	16-04-1996
		US 5497316 A	05-03-1996
		US 5657254 A	12-08-1997
WO 9520127 A	27-07-1995	US 5607002 A	04-03-1997
		EP 0740757 A	06-11-1996
		JP 9508208 T	19-08-1997
		US 5590695 A	07-01-1997
		US 5562132 A	08-10-1996
		US 5711354 A	27-01-1998
WO 9902251 A	21-01-1999	US 5878793 A	09-03-1999
		AU 8481798 A	08-02-1999



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : <b>F17C 13/04, 7/00</b>		<b>A1</b>	(11) International Publication Number: <b>WO 00/00767</b>
			(43) International Publication Date: 6 January 2000 (06.01.00)
(21) International Application Number: PCT/US99/14845 (22) International Filing Date: 30 June 1999 (30.06.99) (30) Priority Data: 60/091,191 30 June 1998 (30.06.98) US (71) Applicant (for all designated States except US): ADCS, LTD. [US/US]; Suite 330, 6805 Capital of Texas Highway, Austin, TX 78731 (US). (72) Inventors; and (75) Inventors/Applicants (for US only): NOAH, Craig, M. [US/US]; 881 San Ardo Way, Mountain View, CA 94043 (US). GREGG, John, N. [US/US]; 100 5th Street, Marble Falls, TX 78611 (US). (74) Agent: O'KEEFE, Robert, M.; Jones, O'Keefe, Egan & Peterman, Building C, Suite 200, 1101 Capital of Texas Highway South, Austin, TX 78746 (US).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> With international search report.	

(54) Title: SYSTEM FOR SUPPLY OF MULTIPLE CHEMICALS TO A PROCESS TOOL

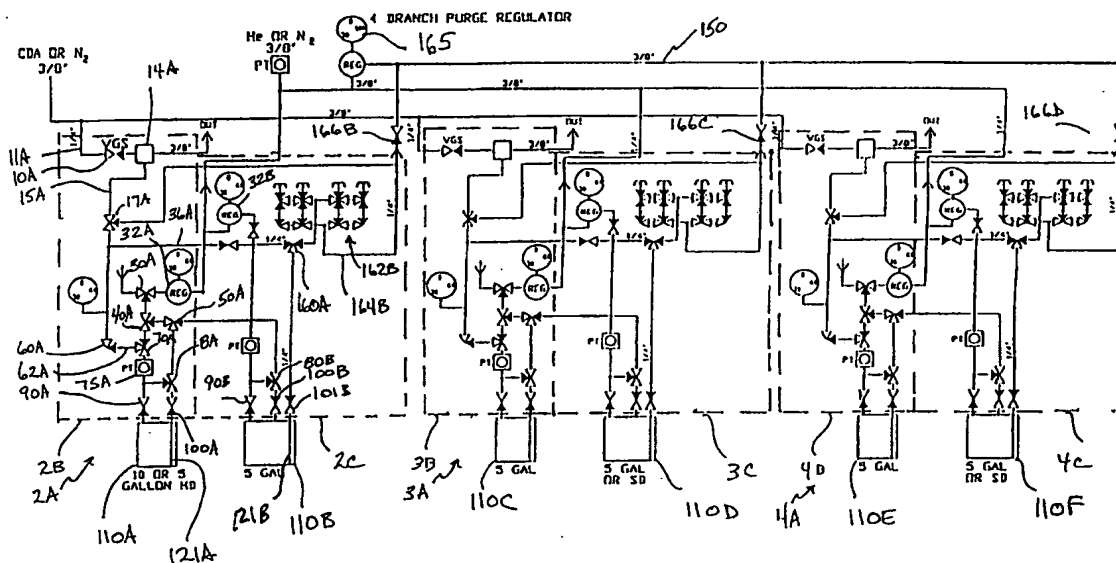

## (57) Abstract

This invention concerns a system for delivering multiple different chemicals to a process tool, comprising: a first supply canister connected to a first supply manifold that connects to a process line; a second supply canister connected to a second supply manifold that connects to the process line.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

# SYSTEM FOR SUPPLY OF MULTIPLE CHEMICALS TO A PROCESS TOOL

## BACKGROUND OF INVENTION

5        This invention generally pertains to a chemical delivery system.

      The chemicals used in the fabrication of integrated circuits must have an ultrahigh purity to allow satisfactory process yields. As integrated circuits have decreased in size, there has been a directly proportional increase in the need for maintaining the purity of source  
10    chemicals. This is because contaminants are more likely to deleteriously affect the electrical properties of integrated circuits as line spacing and interlayer dielectric thickness decrease.

      One ultrahigh purity chemical used in the fabrication of integrated circuits is tetraethylorthosilicate (TEOS). TEOS has been widely used in integrated circuit  
15    manufacturing operations such as chemical vapor deposition (CVD) to form silicon dioxide films. These conformal films are generated upon the molecular decomposition of TEOS at elevated temperatures in plasma enhanced and atmospheric pressure reactors (PECVD, APCVD). TEOS is typically used for undoped, and phosphorous and boron doped interlayer dielectrics, intermetal dielectrics, sidewall spacers, and trench filling applications.

20

      Traditionally, high purity TEOS (and dopants) has been fed to the CVD reaction chamber from small volume quartz containers. More recently, stainless steel containers have been developed, such as described in U.S. Patents 5,465,766; 5,562,132; 5,590,695; 5,607,002; and 5,711,354.

25

      In the production of some electronic devices, multiple chemical compounds have been fed to the reactor so that a layer containing multiple elements may be formed. This has been typically performed by pre-mixing the components and then delivering the mixture to the reactor. For example, TEOS and triethylborate may be fed to the process tool to provide a layer which is in situ doped with boron.

30

It would be highly desirable to provide a system that enables the delivery of each component separately such that proportions of components at the tool may be readily changed and optimized for the desired result. It would also be desirable to provide a system that enables chemicals to be mixed in the delivery system, prior to introduction into the process tool. It would also be desirable to provide a single unit having a smaller footprint than systems employing multiple dispensing points.

### SUMMARY OF INVENTION

This invention provides a solution to one or more of the needs, disadvantages, and shortcomings described above.

In one broad respect, this invention is system for delivering multiple different chemicals to a process tool, comprising: a first refill canister and a first process canister that are connected to a first manifold that connects to at least one first process line wherein the first refill canister refills a first chemical to the first process canister through the first manifold and wherein the first process canister supplies the first chemical to the process tool; a second refill canister and a second process canister that are connected to a second manifold that connects to at least one second process line wherein the second refill canister refills a second chemical to the second process canister through the second manifold and wherein the second process canister supplies the second chemical to the process tool; wherein the first refill canister, the first process canister, the second refill canister, the second process canister and the first and second manifolds are housed in a cabinet. Additional canisters, manifolds, and process lines may be added depending on the desired number of chemicals to be delivered by the system. As used herein, "process line" refers to a line that connects directly or indirectly from the system to the process tool which uses the chemicals being supplied by the system. One non-limiting, representative example of a process tool is a CVP reactor. The system may be housed in a single cabinet which provides containment for the chemicals in the canisters and in which the manifolds may be mounted. Typically, the different chemicals are mixed at the tool; however, the chemicals may be optionally mixed in-line before reaching the tool.



In another broad respect, this invention is a method for manufacturing a system for delivery of multiple different chemicals, comprising: connecting a first refill canister and a first process canister to a first manifold that connects to at least one first process line wherein the first refill canister refills a first chemical to the first process canister through the first manifold and wherein the first process canister supplies the first chemical to the process tool; connecting a second refill canister and a second process canister to a second manifold that connects to at least one second process line wherein the second refill canister refills a second chemical to the second process canister through the second manifold and wherein the second process canister supplies the second chemical to the process tool; connecting a third refill canister and a third process canister to a third manifold that connects to at least one third process line wherein the third refill canister refills a third chemical to the third process canister through the third manifold and wherein the third process canister supplies the third chemical to the process tool; and housing the first refill canister, the first process canister, the second refill canister, the second process canister, the third refill canister, the third process canister, and the first, second and third manifolds in a cabinet.

In some embodiments, this invention provides a system that enables the delivery of each component separately such that proportions of components at the process tool may be readily changed and optimized for the desired result. In certain embodiments, this invention also provides a system that enables chemicals to be mixed in the delivery system, prior to introduction into the process tool. Furthermore, the systems of this invention may advantageously, in certain embodiments, provide a smaller footprint resulting in cost savings due to exhaust for only one cabinet, simplification of maintenance and support for the system, all as otherwise would be provided by multiple systems each housing only one process canister or one pair of process/refill canisters. For chemicals used in the highest volume in the cabinet (e.g., TEOS), one or both of the canisters may be refilled from a larger bulk system (e.g., from a significantly larger canister as for example a 200 liter canister filling a 5 or 10 gallon canister in the cabinet). This has the added benefit that a fab may be supplied its source of TEOS from the system of this invention if the dedicated TEOS line and source is down.

In another broad respect, this invention is a method for supplying multiple chemicals to a process tool, comprising: supplying a first chemical, a second chemical and a third chemical to a process tool from a system for delivering multiple different chemicals to a process tool, wherein the system comprises: a first refill canister and a first process canister that are connected to a first manifold that connects to at least one first process line wherein the first refill canister refills a first chemical to the first process canister through the first manifold and wherein the first process canister supplies the first chemical to the process tool; a second refill canister and a second process canister that are connected to a second manifold that connects to at least one second process line wherein the second refill canister refills a second chemical to the second process canister through the second manifold and wherein the second process canister supplies the second chemical to the process tool; a third refill canister and a third process canister that are connected to a third manifold that connects to at least one third process line wherein the third refill canister refills a third chemical to the third process canister through the third manifold and wherein the third process canister supplies the third chemical to the process tool; wherein the first refill canister, the first process canister, the second refill canister, the second process canister, the third refill canister, the third process canister, and the first, second and third manifolds are housed in a cabinet.

Advantageously, the manifolds that may be employed in the practice of this invention may enable improved purge efficiency for low vapor pressure materials and toxic chemicals. The system of this invention may enable supply of multiple chemical reagents at any desired compositional proportion without the need to change out canisters and the like if the proportions are to be changed. The inventors recognized that a need existed for a system that provides multiple chemicals to a process tool and that provides both a process canister and a refill canister for each chemical, all within a single cabinet. Prior systems that were capable of providing multiple chemicals used a single canister for each chemical; hence, prior systems went down when a particular canister had to be changed out. An important advantage of this invention is that all three chemicals can be continuously supplied to a process tool as a given refill canister is being replenished or replaced with a fresh refill canister. This advantage allows a process tool to be continuously supplied and thus the process tool does not go down due to the system being down.

### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 depicts a manifold and canister configuration for delivery and in situ mixing of a plurality of chemicals to a process tool.

5

FIG. 2A depicts a representative manifold configuration of this invention.

FIG. 2B depicts the path of gas in the manifold while a canister is in service.

10 FIG. 3 depicts the path of flow in the manifold during a depressurization step to remove the head pressure in the canister.

FIG. 4 depicts the flow of gas in the manifold during a liquid drain.

15 FIG. 5 depicts the flow of gas in the manifold during a cycle purge.

FIG. 6 depicts a flowing purge in the manifold during a cycle purge.

FIG. 7 depicts another representative manifold configuration of this invention.

20

FIG. 8 depicts the flow of gas in the manifold of FIG. 7 during a cycle purge.

FIG. 9 depicts a representative cabinet that may house the canisters and manifolds of this invention.

25

FIG. 10 depicts a non-limiting representative configuration of canisters and manifolds in a cabinet of this invention.

FIG. 11 depicts components of refill manifold 2B and supply manifold 2C.

30

FIGS. 12 and 12a depict additional manifold and canister configurations for delivery of a plurality of chemicals to a process tool.

FIG 13 depicts one embodiment of a manifold used in the practice of this invention.

FIGS. 14, 14a, 14b, 14c, 14d, 14e and 14f depict various exterior, interior, and cutaway views of a cabinet used in the practice of this invention.

### DETAILED DESCRIPTION OF THE INVENTION

A general description of the metallic canisters, chemical refill system, operating procedures, components, starting manifold system, and so forth, which may be used in the practice of this invention is set forth in U.S. Patents 5,465,766; 5,562,132; 5,590,695; 5,607,002; and 5,711,354, and SN 08/893,913, filed July 11, 1997, the entire contents of which are incorporated by reference herein.

In FIG. 1 there is shown a representative, non-limiting example of a system configuration of this invention. The system 1 in FIG. 1 includes valves and lines which have been numbered to correspond with those of FIG. 7, to the extent there is overlap. FIG. 1 shows a system 1 that in general provides for refill and delivery of three chemicals. In general, canisters 110A and 110B may contain first chemical, such as TEOS. A manifold 2A includes refill manifold 2B, which connects to canister 110A, and supply manifold 2C which connects to supply canister 110B. Dotted lines 2B and 2C outline the refill and supply manifolds. In addition, system 1 includes manifolds 3A and 4A which comprise refill manifolds 3B and 4B and supply manifolds 3C and 4C, respectively. Refill manifolds 3B and 4B connect to canisters 110C and 110E, with supply manifolds 3C and 4C connecting to supply canisters 110D and 110F.

The system configuration in FIG. 1 employs three essentially identical manifolds 2A, 3A, and 4A. However, the individual manifold designs may vary widely, both individually and overall. For instance, while FIG. 1 depicts use of refill manifold 2B which corresponds to that shown in FIG. 7, the system 1 may instead employ the manifold shown in FIG. 2A or

in U.S. Patents in U.S. Patents 5,465,766; 5,562,132; 5,590,695; 5,607,002; and 5,711,354, incorporated herein by reference. The supply manifolds, likewise, may be of different design.

By increasing head pressure in supply canister 110B, liquid chemical may be forced  
5 out through line 121B, CI 101B, four branch supply valve 160A to four branch supply manifold 162B from which chemical is distributed to one or more process tools. Output lines may be connected to any of the four exit ports of the four branch supply manifold 162B, with such output lines leading to a canister, a valve manifold box containing another four branch supply manifold, or a process tool. Non-limiting examples of valve manifold boxes are  
10 described in U.S. Patent application Serial Number 09/046,907, filed May 24, 1998, incorporated herein by reference. Chemical may be dispensed from supply canisters 110D and 110F by a similar procedure. Chemical may be delivered to a process tool by use of a pump that withdraws chemical from the supply canisters rather than pushing, mechanical pressure, via a pneumatic cylinder, or via a bag of chemical in a canister that has pressure  
15 applied to it, or via a bag in the canister which supplies the pressure as by filling the bag with gas or liquid. In FIG.1, vacuum can be provided via open valve 17A to the four branch manifold 162B while the four branch manifold continues to provide chemical. It should be appreciated that the branched supply manifold 162B uses four branch valves, a supply manifold may use any number of valves. For instance, the branched supply manifold may  
20 employ two or more branch valves. Although there is no limit as to the number of branch valves in the branched supply manifold, typically the number of valves is 10 or less. It should be noted that the branched supply manifold is connected to and in communication with the process line.

25 Additional advantages of this invention include the controlling of valve sequence and flow of gas via a single control unit, with further economy from the capability of controlling a the system by a single off-site computer facilitated by use of a single process control unit in the system.

30 During a refill cycle, a controller (not shown) actuates valves such that pressurized gas is released by regulator 32A and flows through CGI 30A, CBV 40A, CP2 70A, and CI

90A into canister 110A. Similarly, line drain and flowing purge may be facilitated by introduction of inert gas through line 164B via regulator 165 and through valves 166B, 166C, and 166D. FIG. 1 also shows a pressure transducer 75A which serves to monitor pressure in the system.

5

In systems having two pressure transducers, the capability of balancing pressure in the system is improved. In this way, the configuration allows incremental release of head pressure off a process canister by closing 90B, pulling a vacuum on the line, closing off the vacuum, then opening 90B CI to incrementally drop pressure in the process canister. It should be noted that head pressure in the process canister is too high, refill of the process canister becomes problematic if not impossible. It is typically desirable for the process canister to have a pressure that is lower than the pressure in the refill canister by at least 5 psig. Reducing head pressure through practice of this invention may be automated and occur sequentially and in situ during use of the system.

15

The refill manifolds 2B, 3B, and 4B may be subjected to depressurization, liquid drain, vacuum, and flowing purge steps according to the procedures described below in connection with FIGS. 7 and 8. The depressurization, liquid drain, vacuum, and flowing purge steps may be effected on the supply manifolds 2C, 3C, and 4C through appropriate actuation of the refill manifolds.

20

In FIG. 2A there is shown a manifold system of this invention. In FIG. 2A, a vacuum source 14 such as a Venturi vacuum generator may be connected to vacuum supply valve ("VGS") 10 via line 12. VGS 10 functions to control the flow of gas (such as nitrogen, helium, or argon) via inert gas line 11 to the vacuum source 14 if the vacuum source is a Venturi vacuum generator. Vacuum source 14 may also be attached to exhaust line 13 which exits to exhaust. Vacuum source 14 may be connected to low pressure vent valve ("LPV") 20, carrier gas isolation valve ("CGI") 30, canister bypass valve ("CBV") 40, and control valve ("CP3") 60. For each of the valves in the FIGS., the open triangles represent lines which are always open, with the darkened triangles being closed until opened. In FIG. 2A, vacuum source 14 is connected to LPV 20 via line 15, tee 18, and line 17; to CGI 30 via line

25

30

15, tee 18, line 16, tee 35, and line 37; to CBV 40 via line 15, tee 18, line 16, tee 35, line 36, tee 44, and line 61. Check valve 33 in line 37 is closed unless and until the manifold eclipses the desired release pressure. Hence, vacuum source 14 is typically closed off to CGI 30 via line 37. Generally, the check valve 33 may be set to activate if the manifold pressure  
5 surpasses about 100 pounds per square inch. The check valve serves to vent gas if pressure in the system reaches a selected level. The function of LPV 20 is to control venting and evacuation of manifold and canister during start-up and canister change-out. Vacuum gauge 22 may also be connected to LPV 20. Vacuum gauge 22 may function to monitor vacuum during purge cycles. Line 23 may connect LPV 20 to carrier gas isolation valve ("CGI") 30.  
10 Line 31 may connect CGI 30 to regulator 32 which may supply a flow of pressurized inert gas. A delivery pressure gauge 36 may be tied into regulator 32 to monitor regulator pressure and pressure during all operations.

In FIG. 2A, line 34 may connect CGI 30 to CBV 40. Line 41 and 42 may attach CBV  
15 40 to process line isolation valve ("PLI") 50 and to control valve ("CP2") 70. The function of PLI 50 is to control the flow of chemical out of the manifold. CGI 30 functions to control the pressurized gas supply to the manifold. The function of CBV 40 is to control the supply of pressure or vacuum to PLI 50 and to line 71. Line 51 may carry chemicals to either a device outside the system, or to another canister to be refilled. Line 52 may serve to link PLI  
20 50 to control valve ("CP1") 80. Line 61 may connect control valve 60 to control valve 70. From control valve 70, line 71 may lead to tee fitting 72, with lines 73 and 74 running from tee 72 to control valve 80 and canister inlet ("CI") 90, respectively. CI 90 functions to control pressurization and evacuation of a canister. Control valve 80 may link to canister outlet ("CO") 100 via line 81. CO 100 functions to control the flow of chemical from a  
25 canister 110 during chemical delivery and the purging of the canister outlet weldment during canister changes. CI 90 and CO 100 serve to couple the manifold to the corresponding structures on a supply canister, such as male and female threaded joints. Fittings to join the manifold to canister 110 are typically present between CI 90 and tee 72, and between CO 100 and CP1 80. If CO 100 is a dual activator valve, tee 72 can be shifted down to directly  
30 connect with CI 90, such that a line connects the dual activator directly to CI 90.

Canisters 110 may be loaded with a variety of chemicals, and are typically burdened with high purity chemicals for use in semiconductor manufacture. For example, the canisters may contain TEOS, arsenic compounds, titanium compounds, boron compounds, and so forth. In one embodiment of this invention, the canister 110 is at least partially filled with a chemical which is at least 99.9999% pure based on the amount of trace metals in the chemical.

The aforementioned lines, which may also be referred to as conduits, tubing, pipes, passages, and the like, may be constructed of metal tubing, for example, such as stainless steel tubing. Each of the valves may be conventional pneumatically actuated valves, such as a NUPRO 6L-M2D-111-P-III gas control valve. Likewise, the regulator can be a standard type, such as an AP Tech 1806S 3PW F4-F4 V3 regulator. The system may be assembled using conventional methods, such as by using pressure fitting valves, by welding, and the like. The valves may be controlled using conventional process control such as an Omron programmable controller box wired to a touch screen control panel. Alternatively, the valves may be controlled using an ADCS APC<sup>TM</sup> Controller which incorporates an imbedded microprocessor for command sequence execution, with software residing on an EPROM. The control unit, for example, may control flow of pressurized gas to open or close pneumatic valves.

During use, the manifold of this invention may be operated as follows. To push chemical out of the canister 110 to the delivery point, the valves in the manifold are appropriately opened and closed to pressurized gas into the system and into the canister. In FIG. 2B, line 120 illustrates the path of pressurized gas entering canister 110, with line 121 showing the path of liquid chemical exiting canister 110 through a dip tube 111. Thus, pressurized gas from a source (not shown) is released by regulator 32 into line 31. The gas thereafter passes through open CGI 30, then through line 34, CBV 40, line 71, CI 90, and into canister 110. Pressure from entering gas forces liquid chemical up the dip tube, and through CO 100, line 81, CP1 80, line 52, PLI 50, and out line 51 to the receiving point.



When a supply canister (even a full canister) is being changed out, the lines may be purged to rid the manifold of residual chemicals. The first step is depressurization, which functions to remove the head pressure in canister 110. Depressurization may be affected in a few ways. For example, two procedures by which depressurization may occur are depicted in FIG. 3. In one depressurization method, depicted by solid line 130, VGS 10 is opened to allow gas to flow from line 11 through line 12 and into vacuum source 14 such that a vacuum is generated with the flow exiting via line 13 to exhaust. The vacuum which is generated in source 14 pulls a vacuum on line 15, tee 18, line 16, tee 35, line 36, tee 44, line 61, through open CPI 60, line 62, CP2 70, line 71, tee 72, line 74, and open CI 90, thereby pulling a vacuum on the head space of canister 110. Alternatively, depressurization can be affected by opening LPV 20, CP2, and CI 90 so that the vacuum is pulled via solid line 135.

After depressurization, a liquid drain is instituted to clear the lines (weldments) of liquid. Thus, in FIG. 4 gas is introduced via regulator 32 into line 31. CGI 30, CBV 40, and CO 100 are open such that gas flows through lines 34, 41, 52, and 81 such that liquid chemical is forced back into canister 110. The flow of gas during the line drain is illustrated by solid line 140.

Thereafter, a cycle purge is instituted which includes a vacuum step and a flowing purge step as illustrated in FIGS. 5 and 6, respectively. The vacuum step may be accomplished in a variety of ways, including via the configurations depicted by solid lines 150 and 155 in FIG. 5. Thus, in one embodiment, CBV 40 and LPV 20 is open such that when VGS 10 is opened to allow gas into vacuum source 14 via lines 11 and 12, a vacuum is drawn out to exhaust via line 13, with a vacuum thus being pulled on lines 15, 17, 23, 34, 41, 52, and 81. Alternatively, LPV 20 and CP2 70 are open such that a vacuum is pulled on lines 15, 17, 23, 34, 42, 71 and 74. In addition, LPV 20, CP2 70 and CBV 40 can all be open such that a vacuum is pulled on lines 42, 71, and 74 as well as on lines 41, 52, and 81. The openings can be alternated so that lines 42/71/74 and 41/52/81 are intermittently evacuated.

In FIG. 6, a flowing purge of the cycle purge is illustrated. In FIG. 6, regulator 32 allows pressurized gas to enter line 31. With CGI 30, CBV 40, CPI 80, and CPI 60 open

(note CI 90 and CO 100 are closed), the gas flows through lines 34, 41, 52, 73, 71, 62, 61, 36, 16, 15, and 13 to thereby purge the manifold, as depicted in FIG. 6 by solid line 160. LPV 20 may be intermittently opened so that lines 23 and 17 may be purged. After purge, the fittings are typically broken while a positive pressure on the manifold is maintained so that moisture does not enter the manifold. For instance, CGI 30, CBV 40, and CP2 70 may be opened so that gas flows out lines 74 and 81 after the fittings are broken. After a new canister is seated, the purge cycle is typically repeated to remove any water or other contaminant that might have entered the manifold, as well as any water in the fittings and weldments of the new canister.

In FIG. 7 there is shown an alternative embodiment of this invention which is similar to the embodiment depicted in FIG. 1 except that LPV 20, lines 17 and 23, and gauge 22 are absent. If CO 100 is a dual activator valve, tee 72 can be shifted down to directly connect with CI 90 and control valve 80 directly attached to the dual activator, such that a line connects the dual activator directly to CI 90 and such that the number of potential dead legs in the manifold is reduced. In the embodiment shown in FIG. 7, line 43 to CBV 40 may be optionally removed. The same flow scheme shown in FIG. 2 may be employed to push chemicals out of canister 110 for the configuration in FIG. 7. Depressurization of the configuration shown in FIG. 7 may be accomplished using the flow scheme depicted as line 130 in FIG. 3. The liquid drain depicted as solid line 140 in FIG. 4 may then be employed for the configuration of FIG. 7. The vacuum step may be accomplished as set forth in FIG. 8 as depicted by line 180. The flowing purge of FIG. 6 may be used for the configuration in FIG. 7. The embodiment of the invention has many advantages including a reduced number of valves which results in lower cost of the manifold, a reduction in the number of points where a leak may occur as well as a reduction in the chances for valve failure for a given manifold. This embodiment also reduces the number of dead legs in the system, resulting in a more effective flowing purge.

The types of chemicals which may be transferred using the delivery system of this invention may vary widely depending on the type of process tool and desired outcome. Non-limiting examples of representative chemicals include tetraethylorthosilicate ("TEOS"),

triethylphosphate, trimethyl phosphite, trimethyl borate, titanium tetrachloride, tantalum compounds, and the like; solvents such as chlorinated hydrocarbons, ketones such as acetone and methylethylketone, esters such as ethyl acetate, hydrocarbons, glycols, ethers, hexamethyldisilazane ("HMDS"), and the like; solid compounds dispersed in a liquid such as barium/strontium/titanate cocktails (mixtures). These examples of chemicals are not intended to be limiting in any way. The chemicals may be of a variety of purities, and mixtures of chemicals can be used. In one embodiment, a single type of chemical is employed. A given chemical may advantageously have a purity of 99.999% or more with respect to trace metals. If dispersions are employed, it is preferable to flush the lines out with liquid solvents such as triglyme or tetrahydrofuran (THF) so that compounds are not precipitated in the lines when the lines are depressurized. Additionally, for any of the embodiments of this invention, it is contemplated that the manifold can be heated to accelerate evaporation of chemicals in the lines. In this regard, the manifold can be maintained in a heated environment, wrapped with heating tape connected to a variac or the like. To facilitate evaporation during a flowing purge, heated gas could alternatively be employed, such as heated argon, nitrogen, or other inert gas. Similarly, a vaporizer for chemicals containing solid active components may be interposed at a point in the process line. U. S. Patent 5,362,328 incorporated herein by reference, describes a non-limiting example of a vaporizer. Combinations of these techniques can also be employed. For some types of chemicals, it may be possible to purge with reactive chemicals, which react with one or more of the compounds in the line to produce more readily evacuated compounds.

Advantageously, the system of this invention may be used to deliver three or more chemicals to a process tool which uses the mixture of chemicals. The system of this invention may thus provide chemicals to any process tool which requires a chemical during its use. Such process tools may include apparatuses for chemical vapor deposition, photolithography, and etch applications. These process tools are frequently used in the fabrication of electronic devices such as integrated circuits, memory circuits, flat panel display, possibly fiber optic manufacturing, multichip modules (e.g., "MCMs"), and so forth. In addition, it should be appreciated that while this invention may be used to supply a chemical such as TEOS to a

process tool such as a CVD reactor used in the fabrication of integrated circuits, memory devices, and the like, the system may be used in other processes.

5 A pressure transducer may be added on a spare port of the canister to allow for pressure management control to keep an inlet valve for helium or the like closed during operation and to only open when the volume is down.

10 The manifolds of this invention may include a sensor attached, for example, in line 15 to determine whether the lines manifold contains chemicals. Similarly, a sample port could be included in line 15 where a sample of gas from the line can be withdrawn and tested using an analytical device to test for the presence of the chemical.

15 In FIG. 9 there is shown a non-limiting representative example of a cabinet 310 that may be used in the practice of this invention. The cabinet 310 may include front 316, sides 312 and 314 (not shown), and back (not seen) 318 panels, together with top 320 and bottom (not shown). The dimensions and configuration of the sides may vary widely depending on the size, number, and configuration of the canisters and manifolds. For example, while the canisters may be arranged in pairs, two deep, as in FIG. 10, a single canister can be used for each chemical or the paired canisters may be positioned side by side as observed from the front. Referring to FIG. 9, the cabinet may include a variety of advantageous components, such as a set of doors 330A and 330B, a user interface 331 such as a color liquid crystal display touchscreen, vent port 335, base 340 that serves as a containment reservoir in the event of a chemical spill, and lower ventilation slits 345 for influx of air flow into the cabinet. Optional flange 332 may be employed to affix the cabinet 310 to the floor.

25 Referring again to FIG. 10 there is shown a non-limiting representative configuration of canisters and manifolds in the cabinet. In FIG. 10, first, second, and third refill canisters 110 A, 110C, and 110E provide chemicals to first, second, and third supply canisters 110B, 110D, and 110F. Each of the set of refill and supply canisters may contain the same chemical, with each set of canisters containing a different chemical. As shown in FIG. 1, each pair of supply and refill canisters may be connected to a supply and a refill manifold that

form part of an overall manifold. In FIG. 10, three overall manifolds are employed, one manifold for each set of canisters. In FIG. 10, several details as depicted in FIG. 1 have been omitted for simplicity. In general it is seen that the cabinet includes refill manifolds 2B, 3B, and 4B; supply (process) manifolds 2C, 3C, and 4C which include four branch manifolds  
5 162B, 163B, and 164B. FIG. 11 illustrates a three-dimensional representative view of certain components of the manifold 2A that could be mounted within a cabinet 310. As can be seen in FIG. 11, components of refill manifold 2B and supply manifold 2C are shown, including four branch supply manifold 162B, such as may be employed in FIG. 10.

10 FIGS. 12 and 12a depict additional manifold and canister configurations for delivery of a plurality of chemicals to a process tool. FIGS. 12 and 12a are similar to FIG. 1, but are different in certain ways. The system 1 in FIGS. 12 and 12a includes valves and lines which have been numbered to correspond with those of FIG. 1, to the extent there is overlap. In FIG. 12 there is shown another representative, non-limiting example of a system configuration of  
15 this invention. FIG. 12 shows a system 1 that in general provides for refill and delivery of three chemicals.

The system configuration in FIG. 12 employs three essentially identical manifolds 2A, 3A, and 4A. By increasing head pressure in supply canister 110B, liquid chemical may be  
20 forced out through line 121B, CI 101B, four branch supply valve 160A to four branch supply manifold 162B from which chemical is distributed to one or more process tools. Output lines may be connected to any of the four exit ports of the four branch supply manifold 162B, with such output lines leading to a canister, a valve manifold box containing another four branch supply manifold, or a process tool. Chemical may be dispensed from supply canisters 110D  
25 and 110F by a similar procedure. Chemical may be delivered to a process tool by use of a pump that withdraws chemical from the supply canisters rather than pushing, mechanical pressure, via a pneumatic cylinder, or via a bag of chemical in a canister that has pressure applied to it, or via a bag in the canister which supplies the pressure as by filling the bag with gas or liquid. In FIG. 12, vacuum can be provided via line 37A, which ties in above valve  
30 17A, through open valve 17A to the four branch manifold 162B while the four branch manifold continues to provide chemical. Vacuum may also be provided to the valving

attached to canister 110B by opening valve 60B in 2C. It should be appreciated that the branched supply manifold 162B uses four branch valves, a supply manifold may use any number of valves. For instance, the branched supply manifold may employ two or more branch valves. Although there is no limit as to the number of branch valves in the branched supply manifold, typically the number of valves is 10 or less. It should be noted that the branched supply manifold is connected to and in communication with the process line. In FIG. 12, control valve 80B is connected to canister outlet 101B rather than inlet valve 100B as shown in FIG. 1. It may be appreciated that in FIG. 12 the valve configuration in 2C is substantially similar to the valve configuration in 2B, which is in contrast to the configuration shown in FIG. 1. Thus, in FIG. 12 while 2B employs valves 60A, 70A, 40A, 30A and 50A, 2C similarly employs valves 60B, 80B, 70B, 40B, and 30B. In FIGS. 1, 12 and 12A, each of the process canisters (110B, 110D and 110F) has an outlet valve to which a dip tube is connected, an inlet valve through which chemical is provided to the process canister, and a third valve which serves to provide positive pressure or vacuum to the canister. The configuration of FIG. 12a is substantially similarly to FIG. 12 except that distribution manifolds 162B have been removed. This is particularly applicable to systems that supply small quantities of chemicals during a fabrication process, or if only a single tool is being fed chemicals. In both FIG. 12 and FIG. 12a, the system provides a source of silicon, phosphorous and boron.

20

FIG 13 depicts one embodiment of a manifold used in the practice of this invention. This configuration is used in FIG. 12 and FIG. 12a. Thus, in FIG. 13, the manifold amounts to sections of 2B and 2C, for example, wherein the left side that connects to a refill canister includes valves 30A, 40A, 50A, 60A and 70A, and wherein the right side, which connects to a process canister, includes valves 30B, 40B, 50B, 60B and 70B. Each respective side also includes regulators 32A, 32B which serve to meter inert gas into the system and pressure transducers 75A and 75B which serve to monitor pressure.

FIGS. 14, 14a, 14b, 14c, 14d, 14e and 14f depict various exterior, interior, and cutaway views of a cabinet used in the practice of this invention. FIG. 14 shows a representative top for a cabinet of this invention. The top 1401 has dimensions appropriate to

30

fit a given width and length of the cabinet. The top 1401 includes a duct 1402 which serves as an exit conduit for exhaust gases. Three groups of four holes 1403, 1404 and 1405 for distribution manifold outlet lines are included in the top. It is contemplated that the outlet lines (e.g., stainless steel tubing) connect to the distribution manifold and are guided through an appropriate hole, then connect to a process tool or the like. Similarly, the holes may be fitted with fittings (such as male VCR fittings) so that the outlet lines connect to the fittings and then additional lines to the process tool or the like connect to the male fitting on the exterior side of the top. If distribution manifolds are omitted, as in FIG. 12a, then less holes need be bored in the top or, if a top is used which already has multiple holes drilled as in the configuration depicted in FIG. 14, the holes may be capped to close the opening. The top may also include other holes or fittings such as an inlet for a bulk chemical canister 1405, for inert gas source 1406, for Venturi vacuum 1407, 1408 and 1409, for electrical inlets 1410, for air inlet 1411. In this upper view of the top 1401, there are also shown option items such as removable wheels 1412, and the wheels may also be on the left side of the top. The wheels would attach to the base but are shown here from this perspective view. Hinges 1413 serve to attach a section 1414 so that an operator can access the inside of the cabinet from the top. In this embodiment, a circuit breaker 1415 is also depicted, which would connect to internal electrical instrumentation.

FIG. 14a shows the front 1420 of the cabinet. The placement of wheels 1412 are readily seen in this view as being attached to the lower section of the cabinet. The width "W" of the cabinet will vary based on the size and number of canisters in the cabinet. For instance, in one embodiment, the cabinet is wide enough to house three canisters. In another embodiment, the cabinet is wide enough to house four canisters. In FIG. 14a, the duct 1402 protrudes from the top. Two doors 1421a, 1421b form part of the front. The doors may be on spring loaded hinges for ease of entry. Handles 1422a, 1422b are included on the doors, as are vents 1423a, 1423b. A touch screen 1424 provides a means for inputting instructions for the control instrumentation (not shown). A small window 1425 allows an operator to observe the inside of the cabinet without opening the doors 1421a, 1421b. The front 1420 includes an upper area 1426 and a lower area 1427. The upper area 1426 provides additional space for manifolds, instrumentation and the like that may be included in the cabinet. The lower area

1427 typically provides an area above the canisters that serves as a safety containment area in the event of leakage. The containment area is commonly angled as depicted by phantom line 1428 so that liquid chemical may gravity feed toward drain pan 1429. A sump (not shown) may also be included to pump off liquid chemical from the drain pan 1429.

5

FIG. 14b is a side view of the cabinet showing one of the sides 1430. In this partial cutaway view, inner aspects of certain components are shown, including the touch screen 1424 and duct 1402. In this embodiment, an area 1431 defines an area that serves to house control instrumentation. A second recess area 1432 is also shown. FIG. 14c shows the back 1435 of the cabinet. The cabinet shown in FIGS. 14-14c has a cabinet width (excluding appendages such as wheels) of about 44.75 inches (about 114 cm), a depth of about 28 inches (about 71 cm) and a height with wheels to the duct of about 79 1/8 inches (about 198 cm). It should be appreciated that these dimensions may vary depending on the number and size of the canisters.

15

FIG. 14d and 14e depict front and side views of a pair of canisters seated in a cutaway portion of a cabinet. In FIG. 14d a canister 1440 sits in an elevated position above the bottom 1441 of the cabinet and may rest on a shelf 1442. The valves, regulators and tubing shown in the upper half of the cabinet correspond to manifold 2A of FIG. 1 or FIG. 12. Since this is a cutaway view, additional canister pairs would be housed in the remainder of the cabinet. In this sense, FIG. 14d shows a representative "cell" of the system. It should be appreciated that while a cabinet having 3 cells is depicted in FIG. 14d, additional cells may be included such that a cabinet houses 4 pairs of canisters, 5 pairs of canisters and so forth. FIG. 14e shows a side view of the canister pair. Here it is seen that the back canister 1443 sits on the floor of the cabinet. Each of canisters 1440 and 1443 may be attached to respective portions of manifold 2A by stainless steel tubing, not shown. An upraised canister 1440 facilitates easier change out of the canister for the operator. FIG. 14f shows a perspective view of canisters 1440 and 1443. In this view it is seen that canister 1443 may be seated on a shelf 1450 to raise it just above the very base of the cabinet. This view also shows more detail of the hinges 1451 that may be used to attach the door 1421a to left side 1453, as well as a locking mechanism 1452 for the door that connect to handle 1422a.

20

25

30



Further modifications and alternative embodiments of this invention will be apparent to those skilled in the art in view of this description. Accordingly, this description is to be construed as illustrative only and is for the purpose of teaching those skilled in the art the manner of carrying out the invention. It is to be understood that the forms of the invention herein shown and described are to be taken as presently preferred embodiments. Equivalent elements may be substituted for those illustrated and described herein, and certain features of the invention may be utilized independently of the use of other features, all as would be apparent to one skilled in the art after having the benefit of this description of the invention.

**WHAT IS CLAIMED IS:**

1. A system for delivering multiple different chemicals to a process tool, comprising:

5 a first refill canister and a first process canister that are connected to a first manifold that connects to at least one first process line wherein the first refill canister refills a first chemical to the first process canister through the first manifold and wherein the first process canister supplies the first chemical to the process tool;

10 a second refill canister and a second process canister that are connected to a second manifold that connects to at least one second process line wherein the second refill canister refills a second chemical to the second process canister through the second manifold and wherein the second process canister supplies the second chemical to the process tool;

wherein the first refill canister, the first process canister, the second refill canister, the second process canister and the first and second manifolds are housed in a cabinet.

15 2. The system of claim 1 further comprising: a third refill canister and a third process canister are connected to a third manifold that connects to at least one third process line wherein the third refill canister refills the third process canister through the third manifold and wherein the third refill canister and the third process canister and third manifold  
20 are housed in the cabinet.

3. The system of claim 2 further comprising a fourth refill canister and a fourth process canister are connected to a fourth manifold that connects to at least one fourth process line wherein the fourth refill canister refills the fourth process canister through the fourth  
25 manifold and wherein the fourth refill canister and the fourth process canister and fourth manifold are housed in the cabinet.

4. The system of claim 1 wherein the cabinet houses a total of six or eight canisters.

5. The system of claim 1 wherein at least one of the manifolds comprises: a vacuum supply valve; a vacuum generator; a pressure vent valve; a gas inlet valve; a bypass valve; an isolation valve; a control valve; a canister inlet valve; a canister outlet valve; and a canister inlet coupler; wherein the vacuum supply valve is connected to the vacuum generator; wherein the vacuum generator is connected to the pressure vent valve and the control valve; wherein the gas inlet valve is connected to pressure vent valve and bypass valve; wherein the bypass valve is further connected to isolation valve and the canister inlet valve; wherein the isolation valve is also connected to canister outlet valve; wherein canister inlet valve is connected to control valve, and canister outlet valve.

6. The system of claim 1 wherein at least one manifold of the system comprises: a vacuum supply valve connected to a vacuum generator; a pressure vent valve connected to the vacuum generator and to a gas inlet valve; a control valve connected to vacuum generator; wherein the gas inlet valve is also connected to a bypass valve, an isolation valve connected to a canister outlet valve and to the bypass valve, and a canister inlet valve connected to the bypass valve, the control valve, and a canister outlet valve.

7. The system of claim 1 wherein the first refill canister contains tetraethylorthosilicate; wherein the second refill canister contains triethylphosphate or triethylphosphite; and wherein the third refill canister contains triethylborate.

8. The system of claim 1 wherein the cabinet is composed of two sides, a back, a top, a base and a front having at least one door, wherein the base optionally has wheels attached, wherein at least one of the at least one door has a touch screen.

9. The system of claim 8 wherein the cabinet includes an angled containment floor that directs chemical to a drain pan.

10. A method for manufacturing a system for delivery of multiple different chemicals, comprising:

connecting a first refill canister and a first process canister to a first manifold that connects to at least one first process line wherein the first refill canister refills a first chemical to the first process canister through the first manifold and wherein the first process canister supplies the first chemical to the process tool;

5 connecting a second refill canister and a second process canister to a second manifold that connects to at least one second process line wherein the second refill canister refills a second chemical to the second process canister through the second manifold and wherein the second process canister supplies the second chemical to the process tool;

10 connecting a third refill canister and a third process canister to a third manifold that connects to at least one third process line wherein the third refill canister refills a third chemical to the third process canister through the third manifold and wherein the third process canister supplies the third chemical to the process tool; and

housing the first refill canister, the first process canister, the second refill canister, the second process canister, the third refill canister, the third process canister, and the first, 15 second and third manifolds in a cabinet.

11. The method of claim 10 further comprising connecting a fourth refill canister and a fourth process canister to a fourth manifold that connects to at least one fourth process line wherein the fourth refill canister refills the fourth process canister through the fourth manifold and wherein the fourth refill canister and the fourth process canister and fourth 20 manifold are housed in the cabinet.

12. The method of claim 10 wherein at least one of the manifolds comprises: a vacuum supply valve; a vacuum generator; a pressure vent valve; a gas inlet valve; a bypass 25 valve; an isolation valve; a control valve; a canister inlet valve; a canister outlet valve; and a canister inlet coupler; wherein the vacuum supply valve is connected to the vacuum generator; wherein the vacuum generator is connected to the pressure vent valve and the control valve; wherein the gas inlet valve is connected to pressure vent valve and bypass valve; wherein the bypass valve is further connected to isolation valve and the canister inlet 30 valve; wherein the isolation valve is also connected to canister outlet valve; wherein canister inlet valve is connected to control valve, and canister outlet valve.

13. The method of claim 10 wherein at least one manifold of the system comprises: a vacuum supply valve connected to a vacuum generator; a pressure vent valve connected to the vacuum generator and to a gas inlet valve; a control valve connected to vacuum generator; wherein the gas inlet valve is also connected to a bypass valve, an isolation valve connected to a canister outlet valve and to the bypass valve, and a canister inlet valve connected to the bypass valve, the control valve, and a canister outlet valve.

14. The method of claim 10 wherein the first refill canister contains tetraethylorthosilicate; wherein the second refill canister contains triethylphosphate or triethylphosphite; and wherein the third refill canister contains triethylborate.

15. The method of claim 10 wherein the cabinet is composed of two sides, a back, a top, a base and a front having at least one door, wherein the base optionally has wheels attached, wherein at least one of the at least one door has a touch screen.

16. The method of claim 15 wherein the cabinet includes an angled containment floor that directs chemical to a drain pan.

17. A method for supplying multiple chemicals to a process tool, comprising: supplying a first chemical, a second chemical and a third chemical to a process tool from a system for delivering multiple different chemicals to a process tool,

wherein the system comprises:

a first refill canister and a first process canister that are connected to a first manifold that connects to at least one first process line wherein the first refill canister refills a first chemical to the first process canister through the first manifold and wherein the first process canister supplies the first chemical to the process tool;

a second refill canister and a second process canister that are connected to a second manifold that connects to at least one second process line wherein the second refill canister refills a second chemical to the second process canister through the second manifold and wherein the second process canister supplies the second chemical to the process tool;

a third refill canister and a third process canister that are connected to a third manifold that connects to at least one third process line wherein the third refill canister refills a third chemical to the third process canister through the third manifold and wherein the third process canister supplies the third chemical to the process tool;

5 wherein the first refill canister, the first process canister, the second refill canister, the second process canister, the third refill canister, the third process canister, and the first, second and third manifolds are housed in a cabinet.

10 18. The method of claim 17 further comprising a fourth refill canister and a fourth process canister are connected to a fourth manifold that connects to at least one fourth process line wherein the fourth refill canister refills the fourth process canister through the fourth manifold and wherein the fourth refill canister and the fourth process canister and fourth manifold are housed in the cabinet.

15 19. The method of claim 17 wherein the cabinet that houses a total of six or eight canisters.

20 20. The method of claim 17 wherein at least one of the manifolds comprises: a vacuum supply valve; a vacuum generator; a pressure vent valve; a gas inlet valve; a bypass valve; an isolation valve; a control valve; a canister inlet valve; a canister outlet valve; and a canister inlet coupler; wherein the vacuum supply valve is connected to the vacuum generator; wherein the vacuum generator is connected to the pressure vent valve and the control valve; wherein the gas inlet valve is connected to pressure vent valve and bypass valve; wherein the bypass valve is further connected to isolation valve and the canister inlet valve; wherein the isolation valve is also connected to canister outlet valve; wherein canister inlet valve is connected to control valve, and canister outlet valve.


30 21. The method of claim 17 wherein at least one manifold of the system comprises: a vacuum supply valve connected to a vacuum generator; a pressure vent valve connected to the vacuum generator and to a gas inlet valve; a control valve connected to vacuum generator; wherein the gas inlet valve is also connected to a bypass valve, an

isolation valve connected to a canister outlet valve and to the bypass valve, and a canister inlet valve connected to the bypass valve, the control valve, and a canister outlet valve.


22. The method of claim 17 wherein the first refill canister contains  
5 tetraethylorthosilicate; wherein the second refill canister contains triethylphosphate or triethylphosphite; and wherein the third refill canister contains triethylborate.

23. The method of claim 17 wherein the cabinet is composed of two sides, a back,  
a top, a base and a front having at least one door, wherein the base optionally has wheels  
10 attached, wherein at least one of the at least one door has a touch screen.

24. The method of claim 23 wherein the cabinet includes an angled containment  
floor that directs chemical to a drain pan.

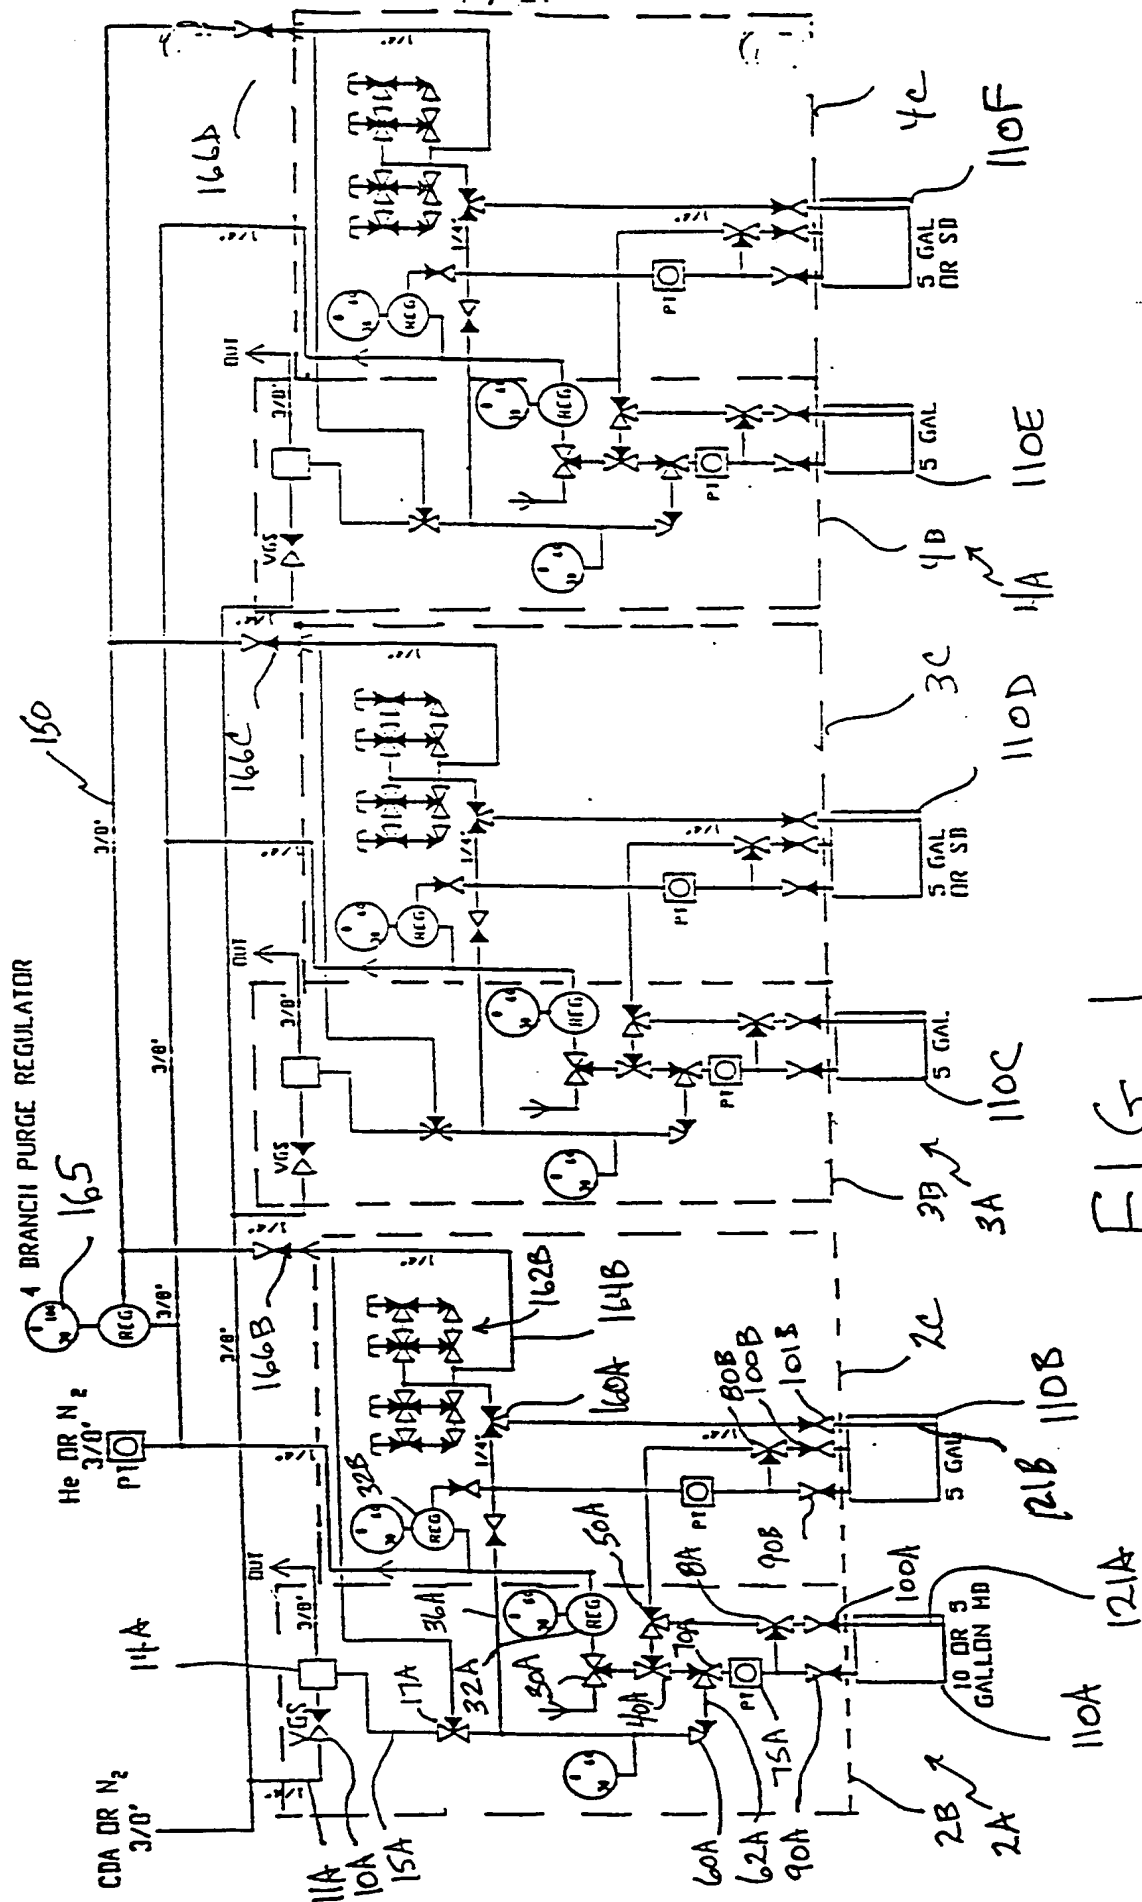



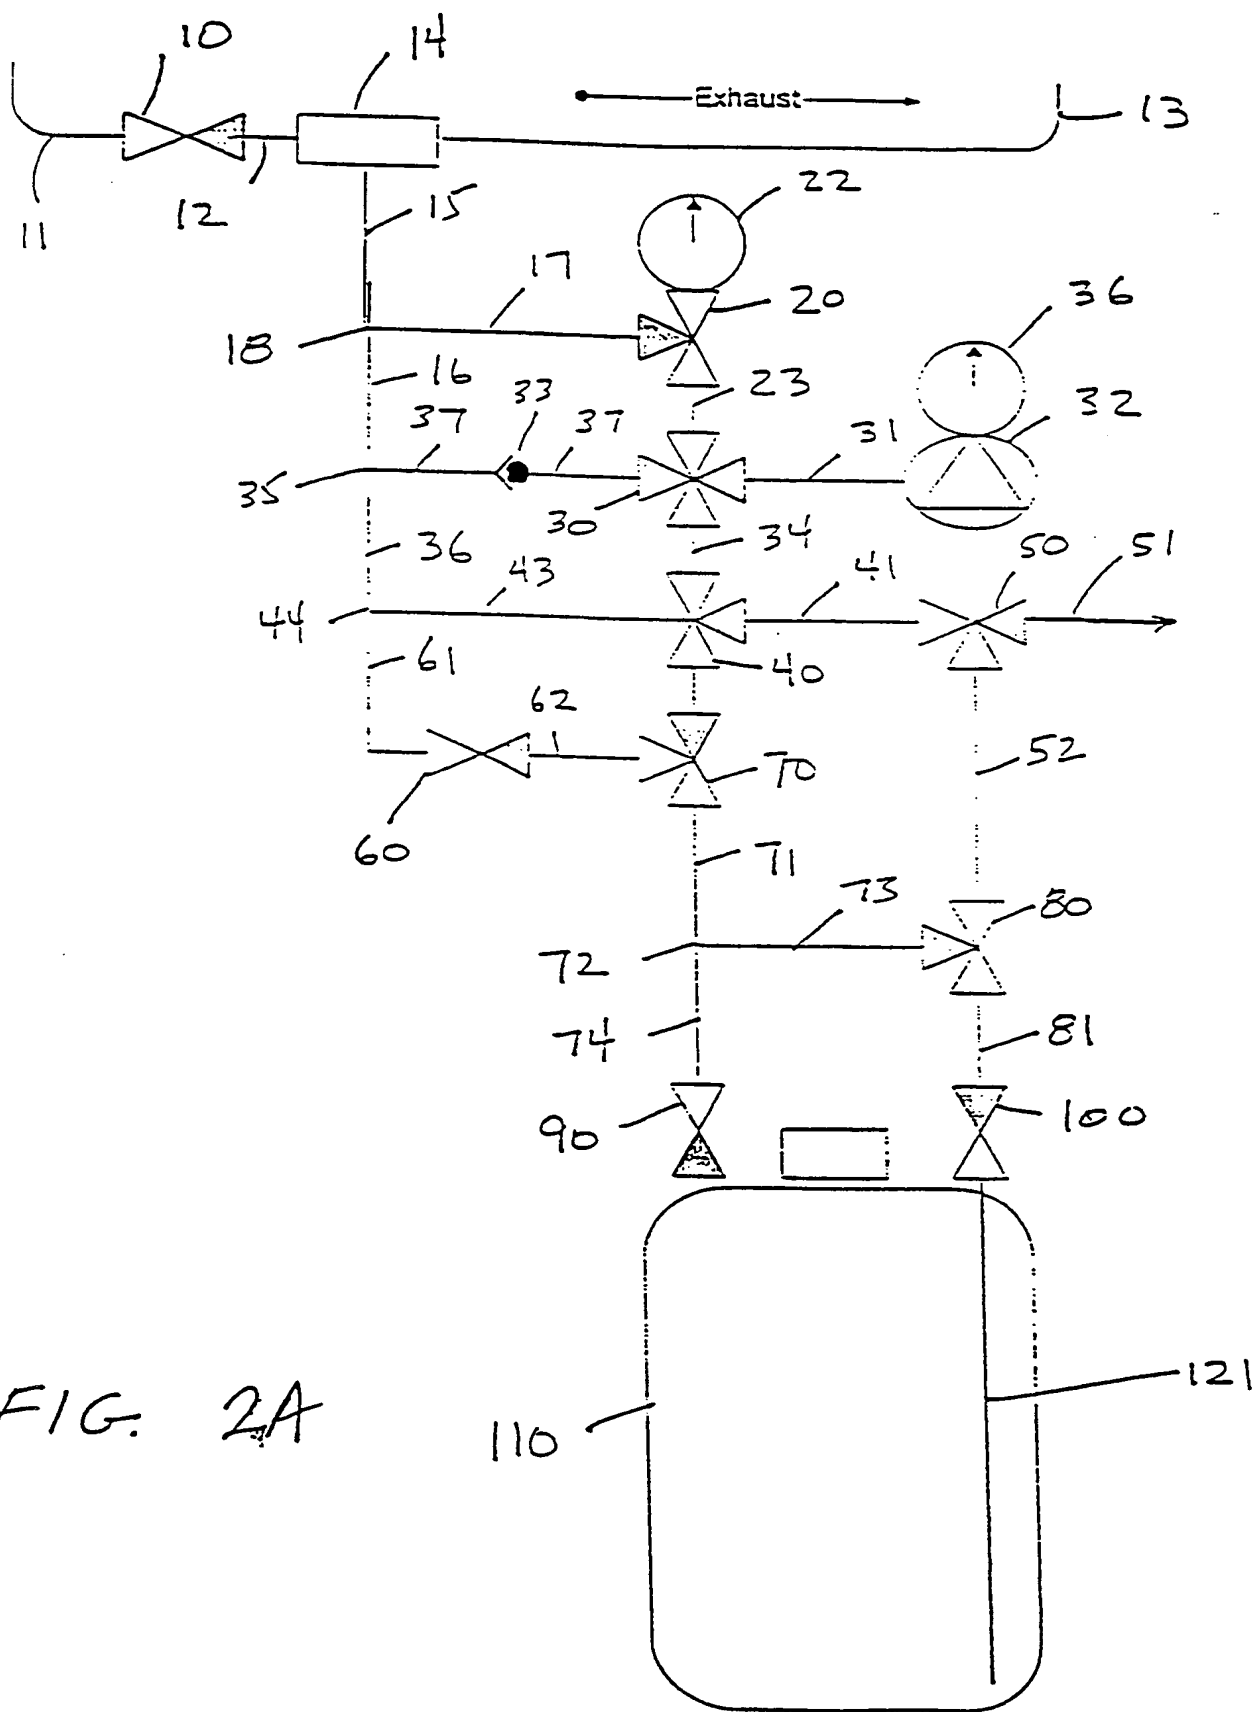

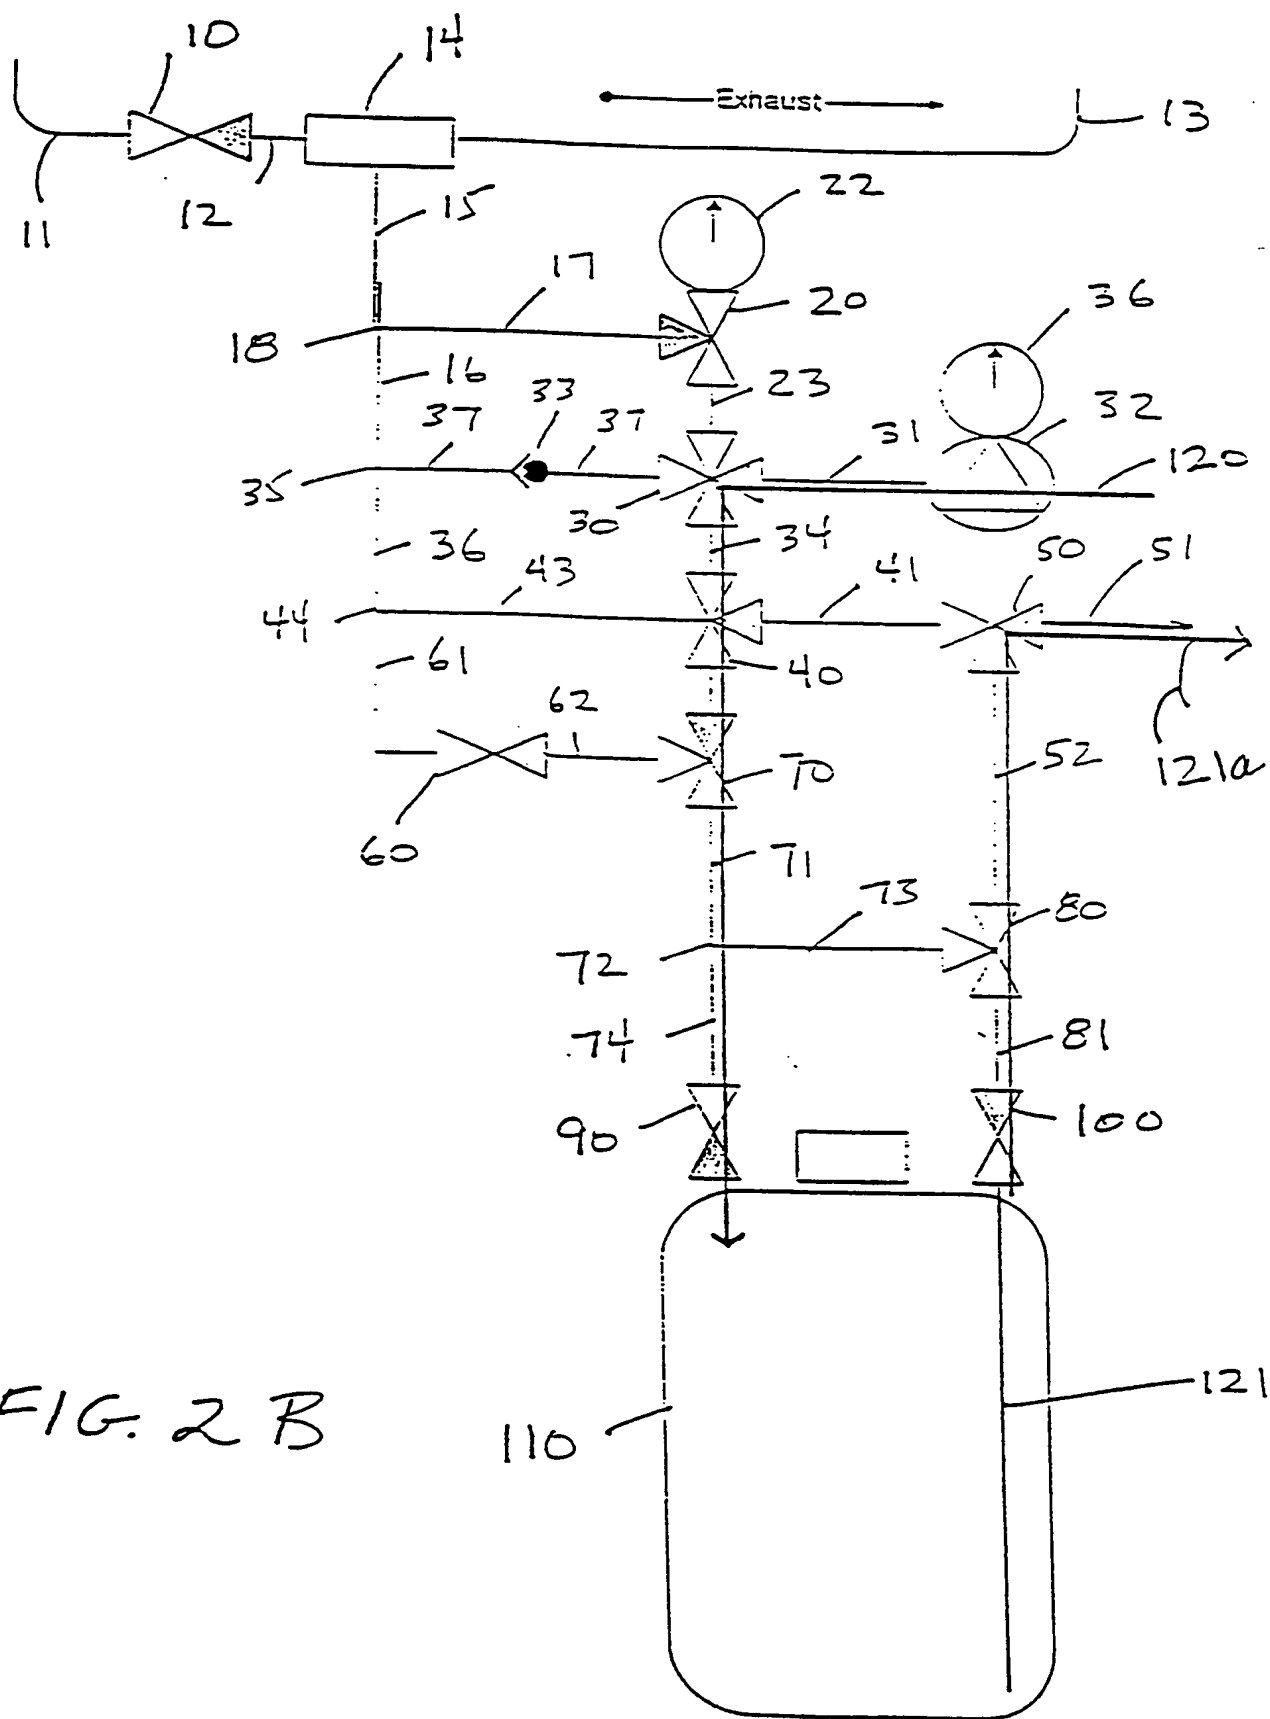
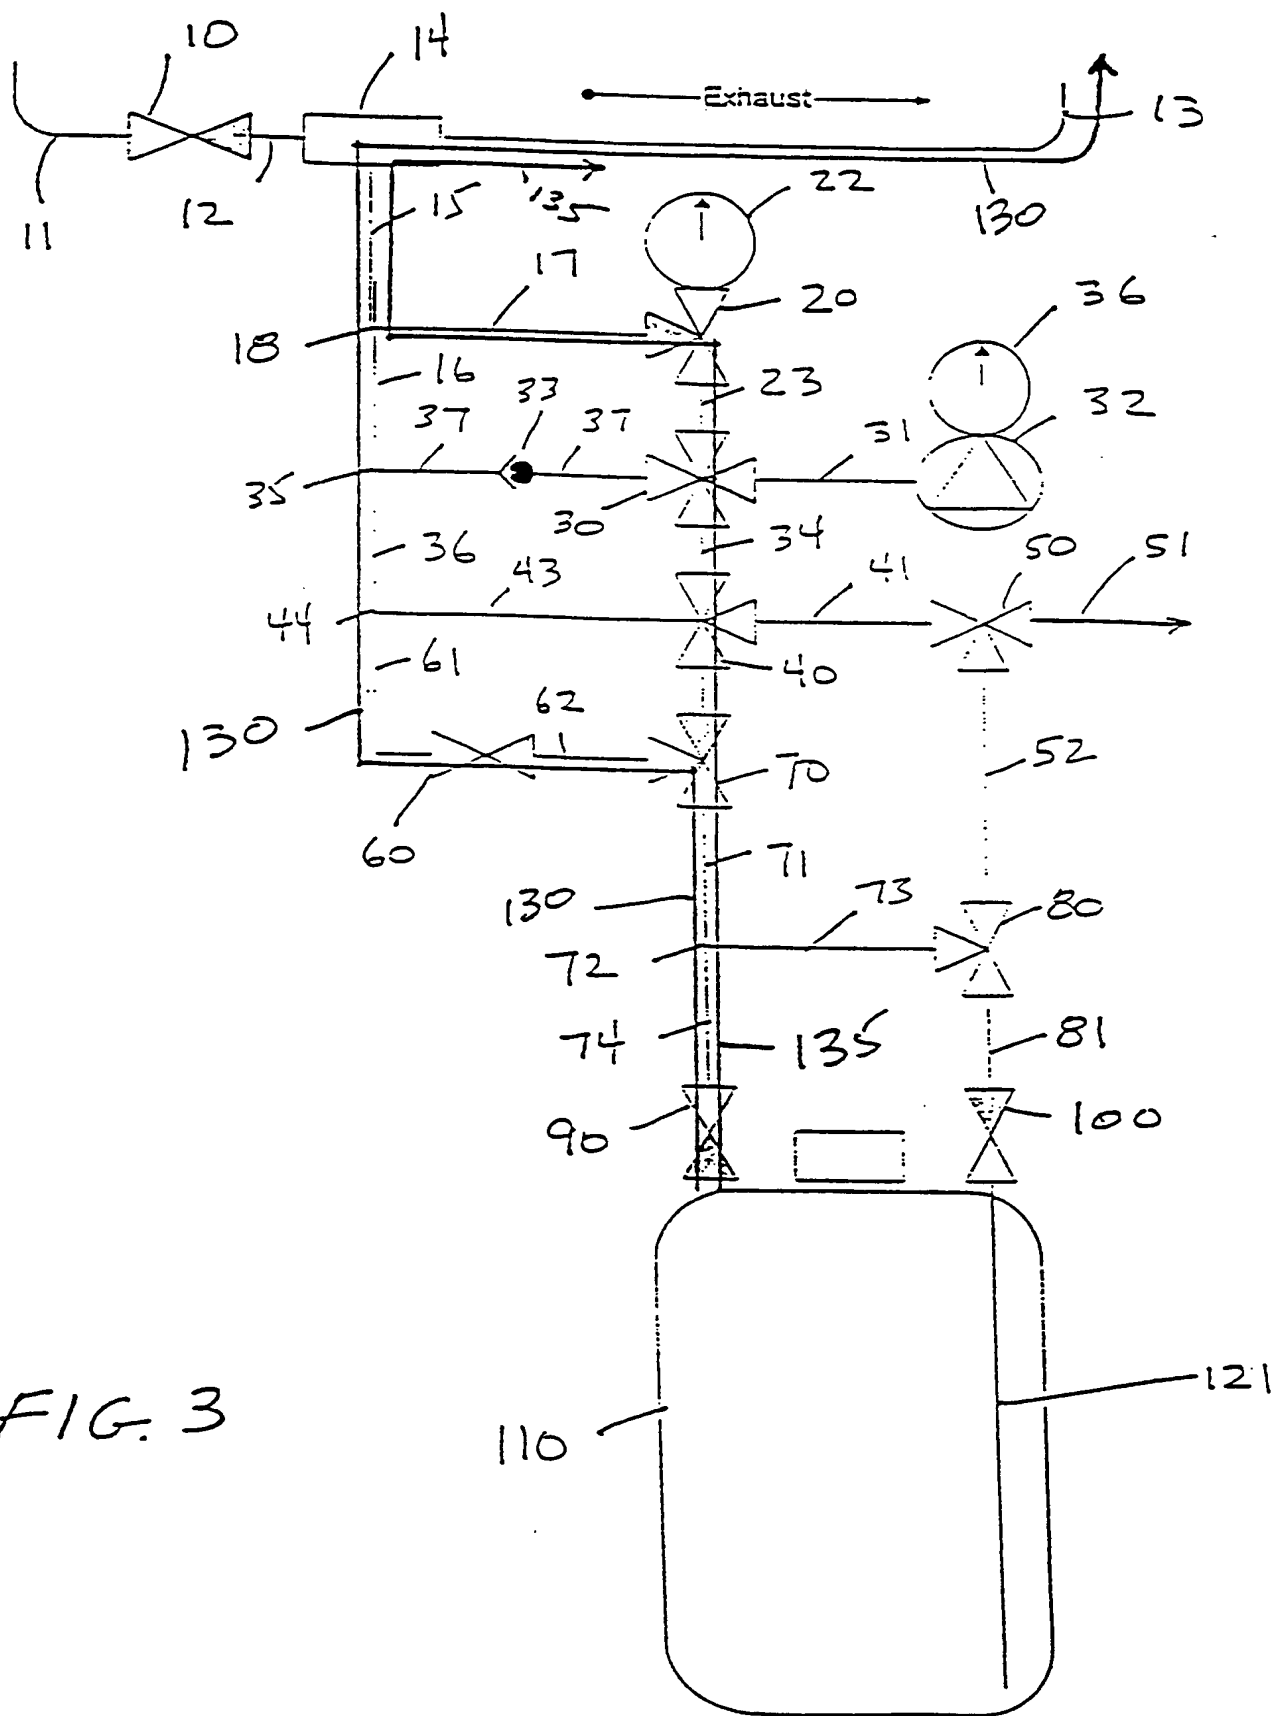
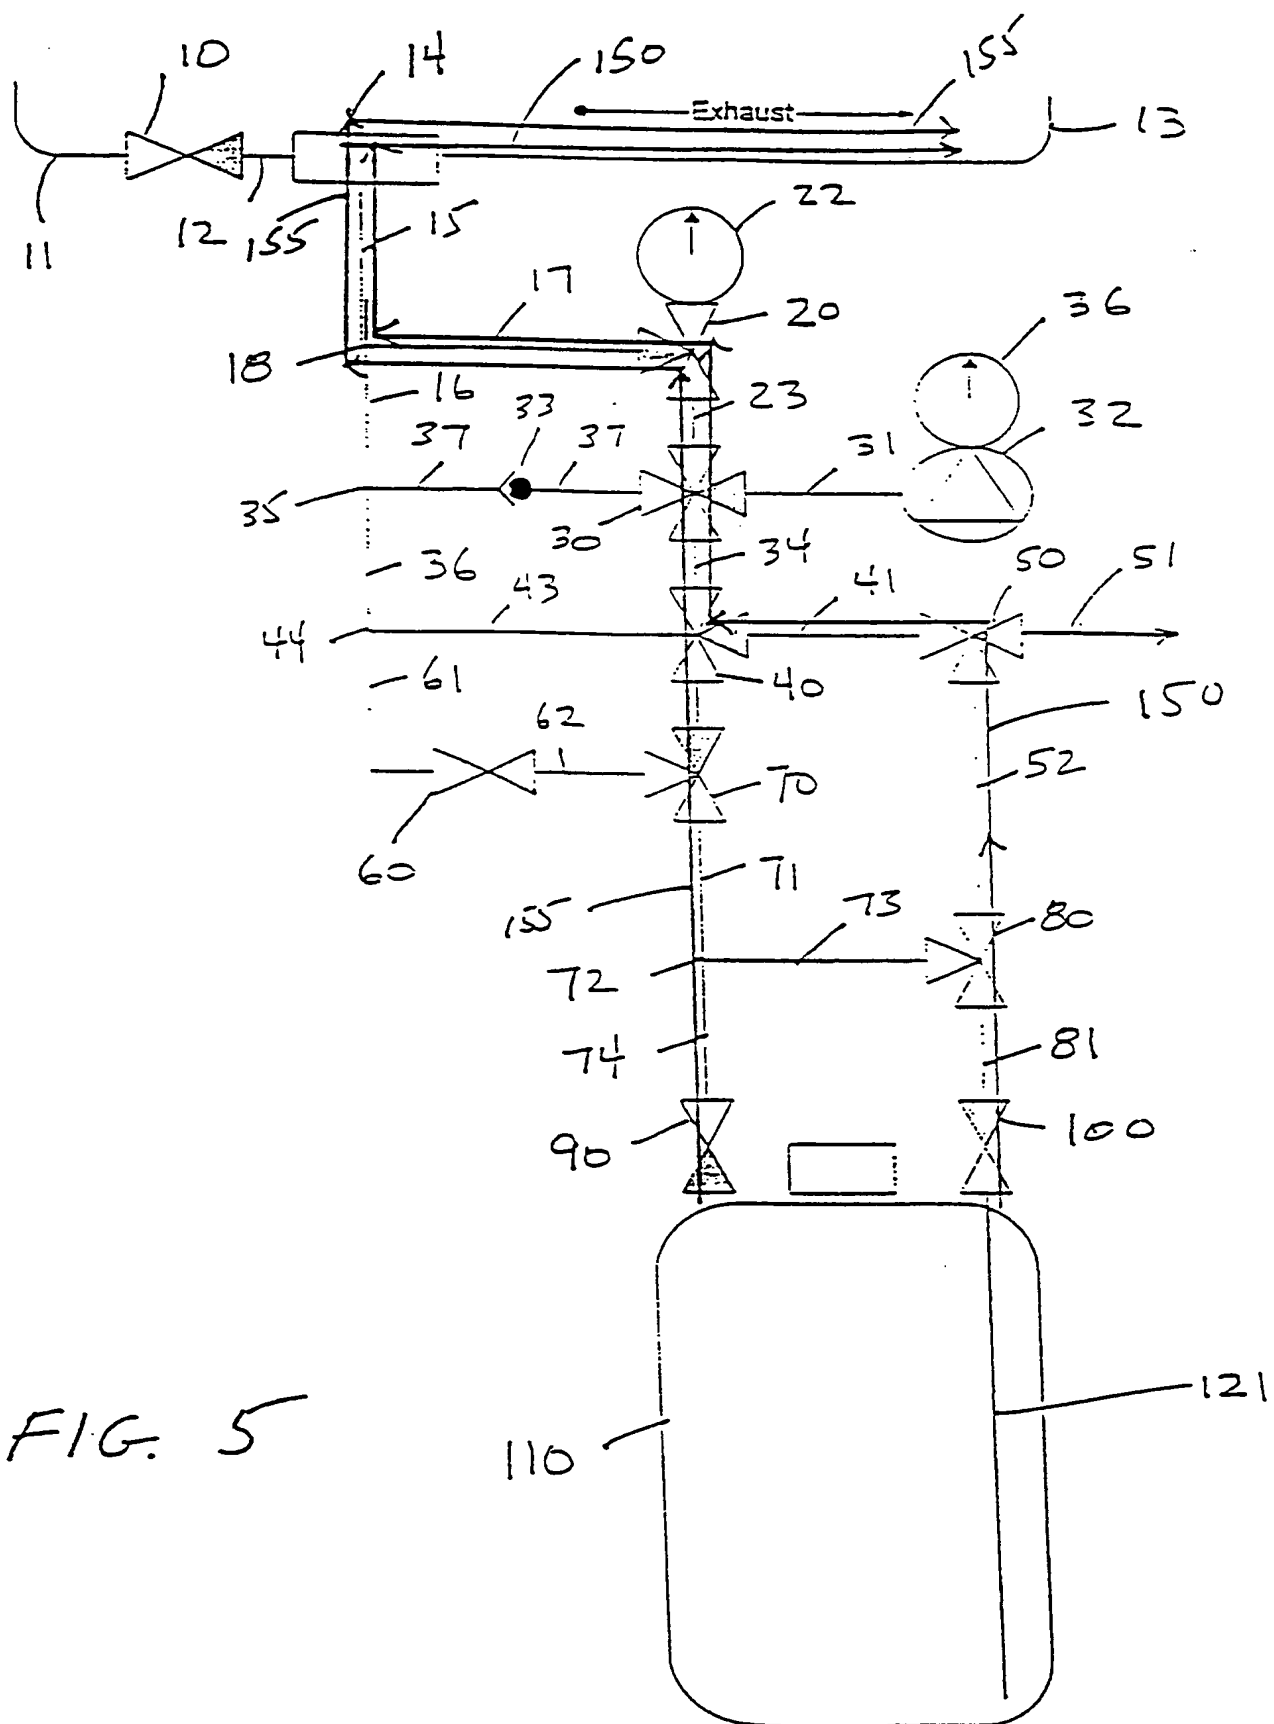


FIG. 2B







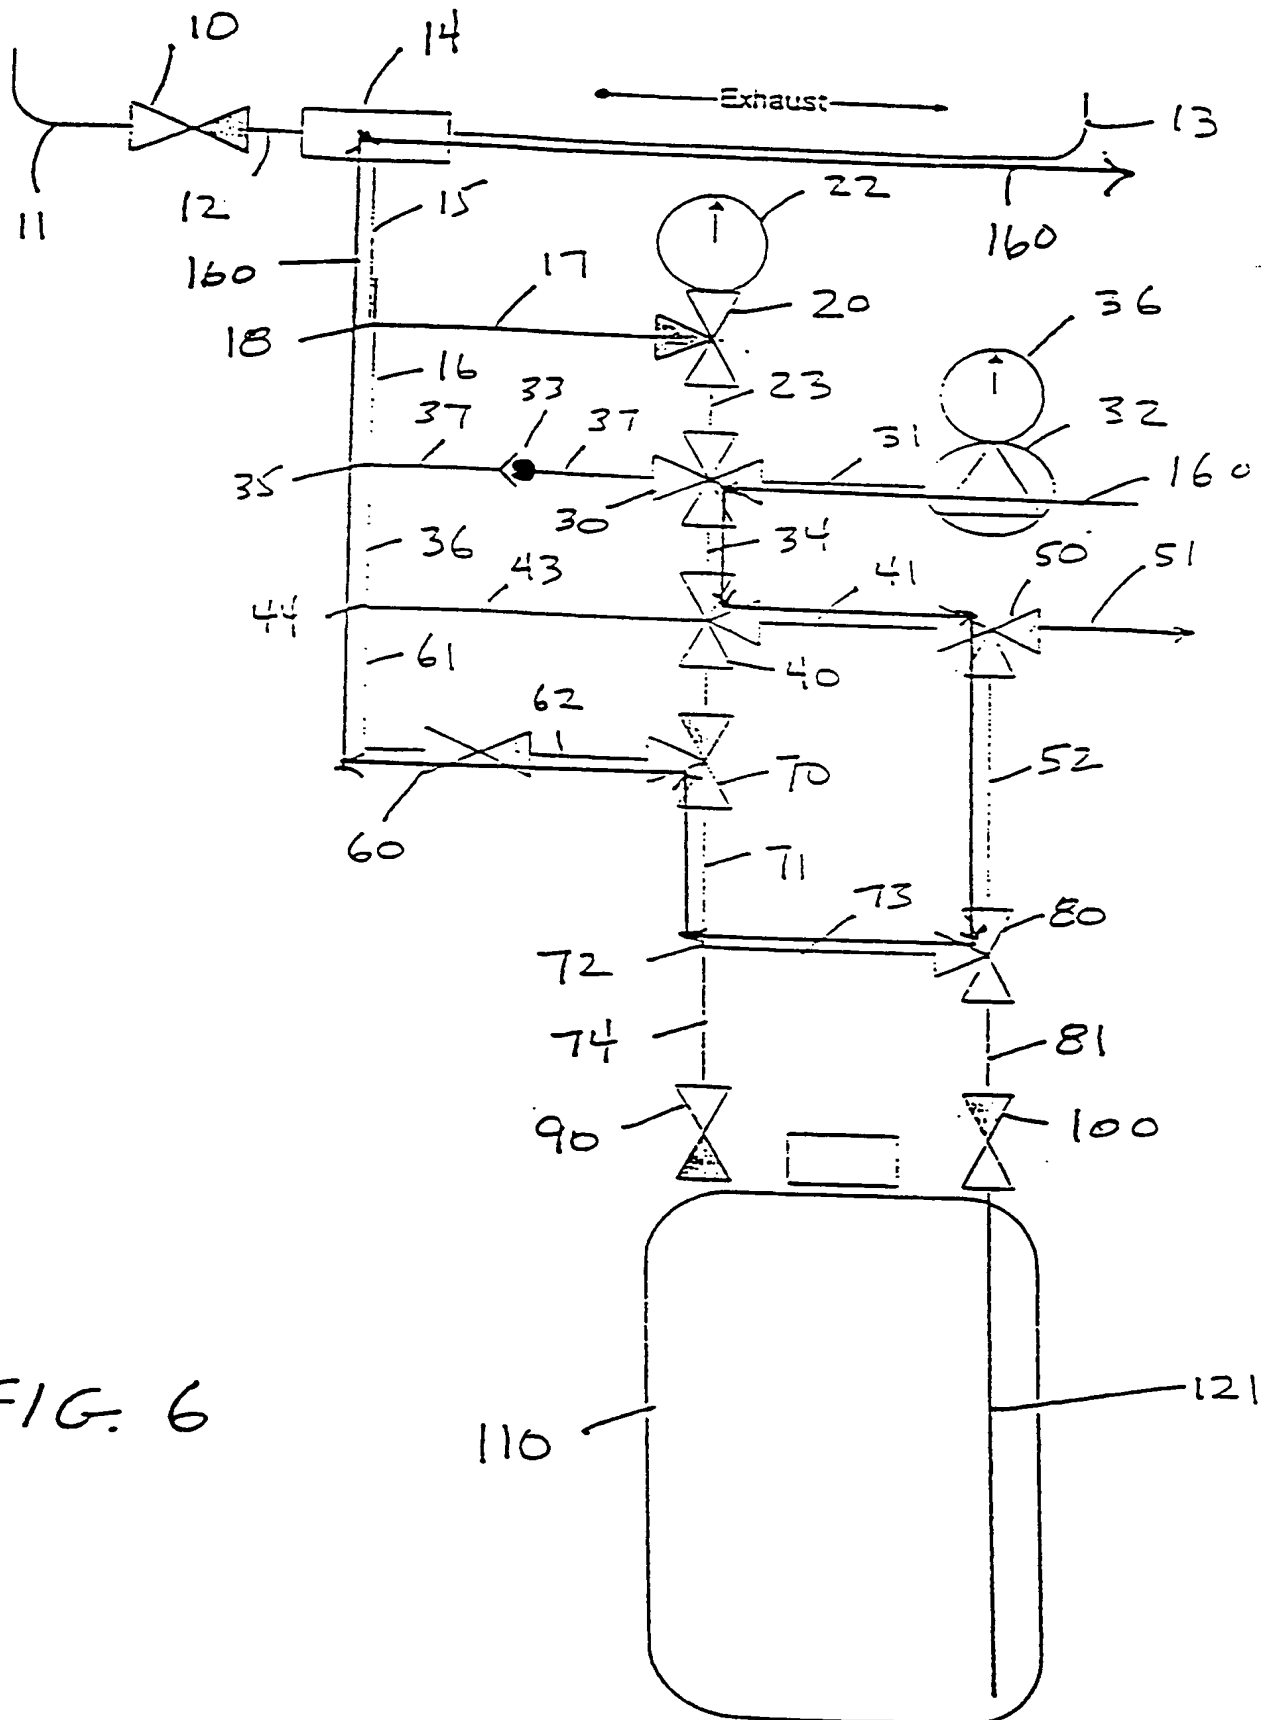


FIG. 6

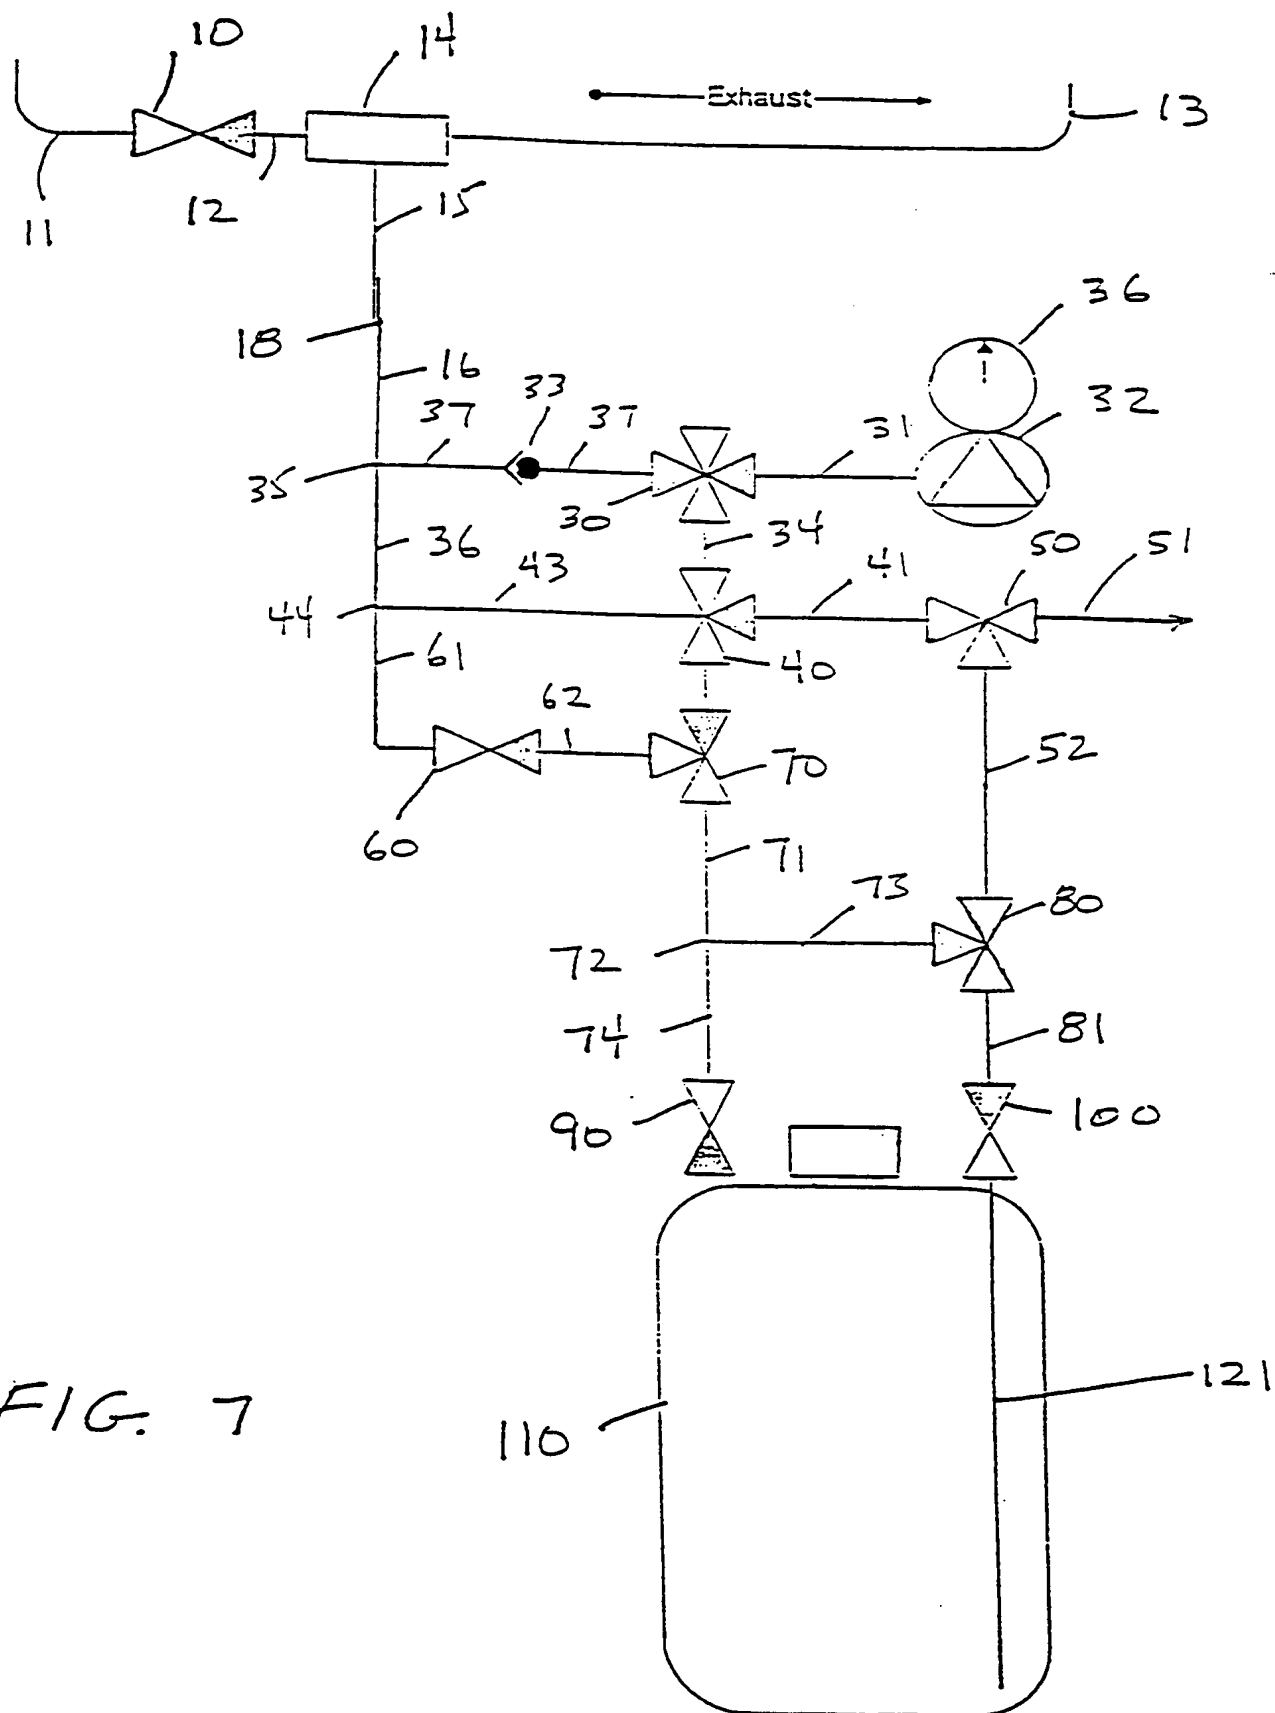


FIG. 7

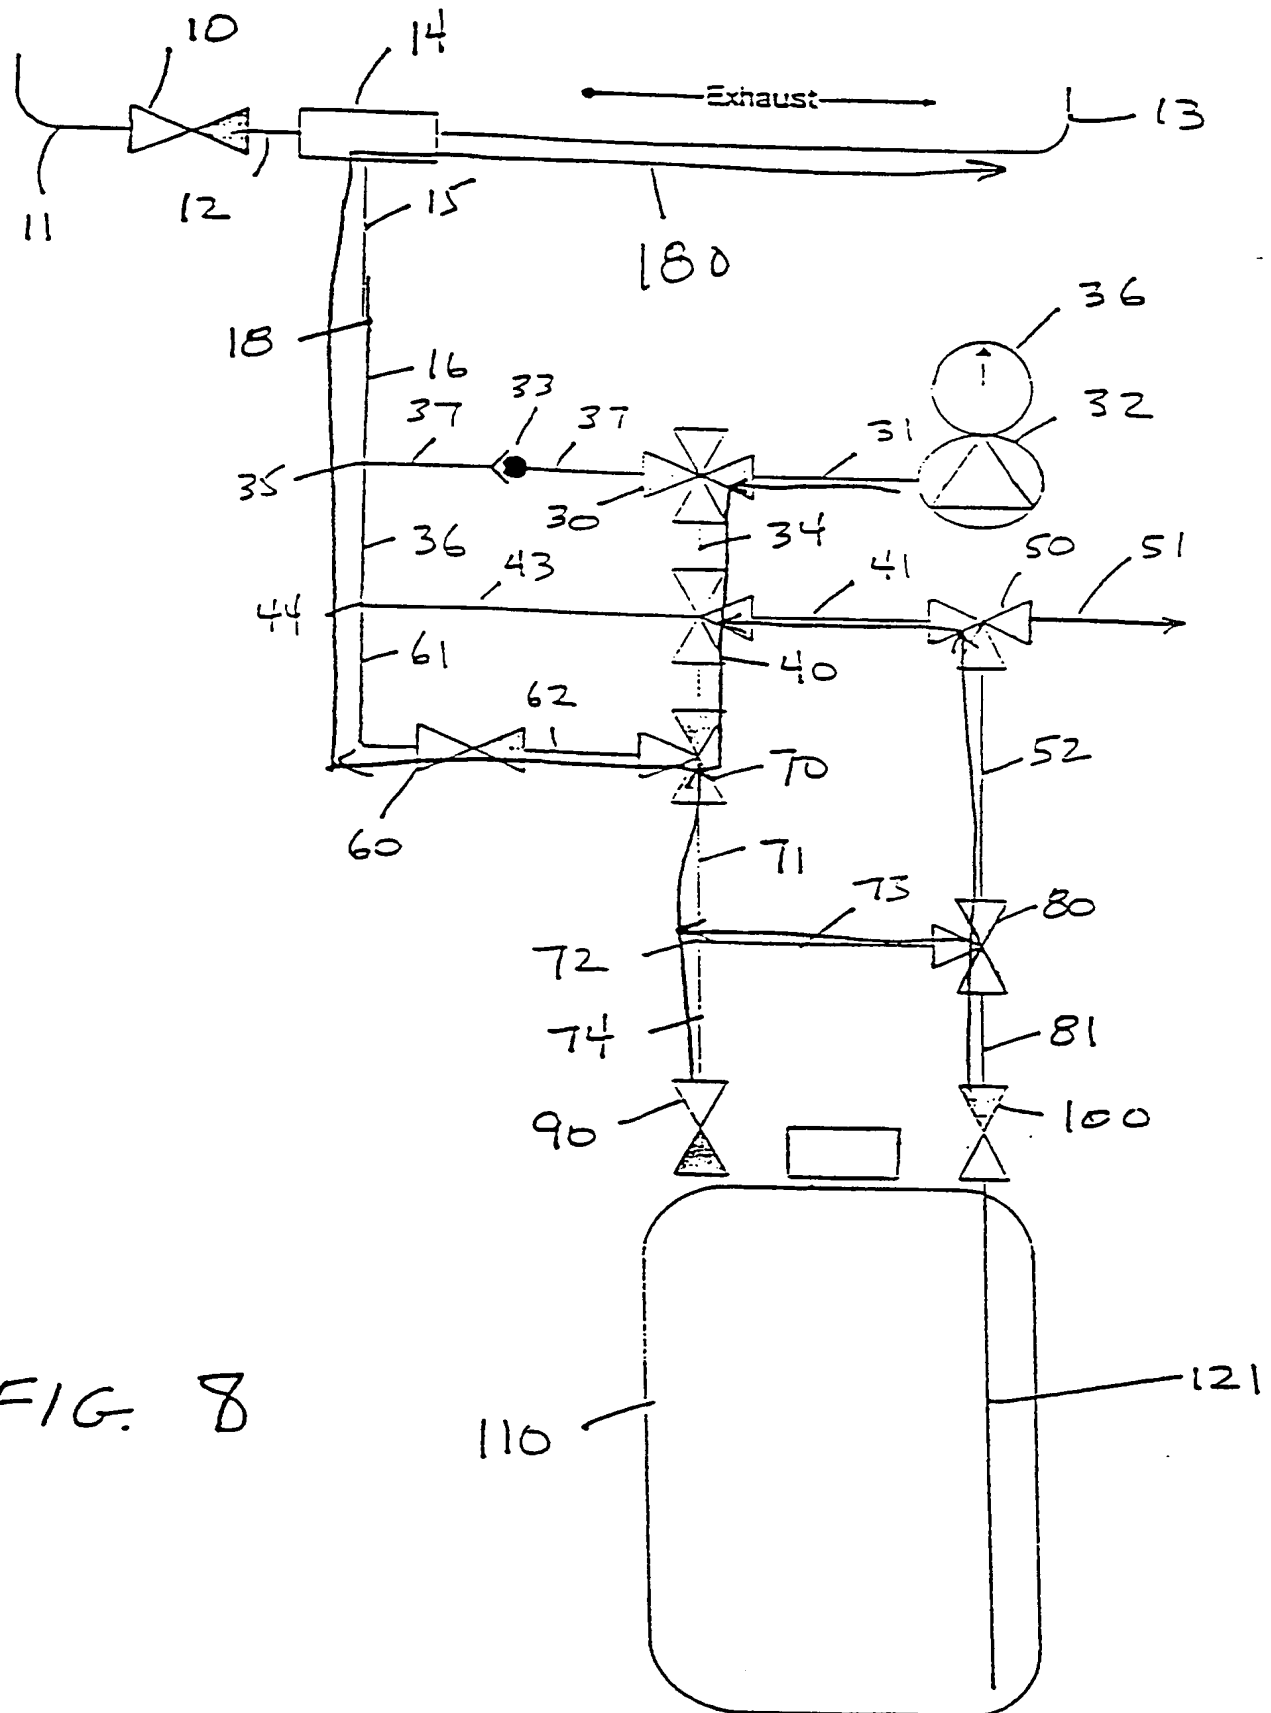


FIG. 8





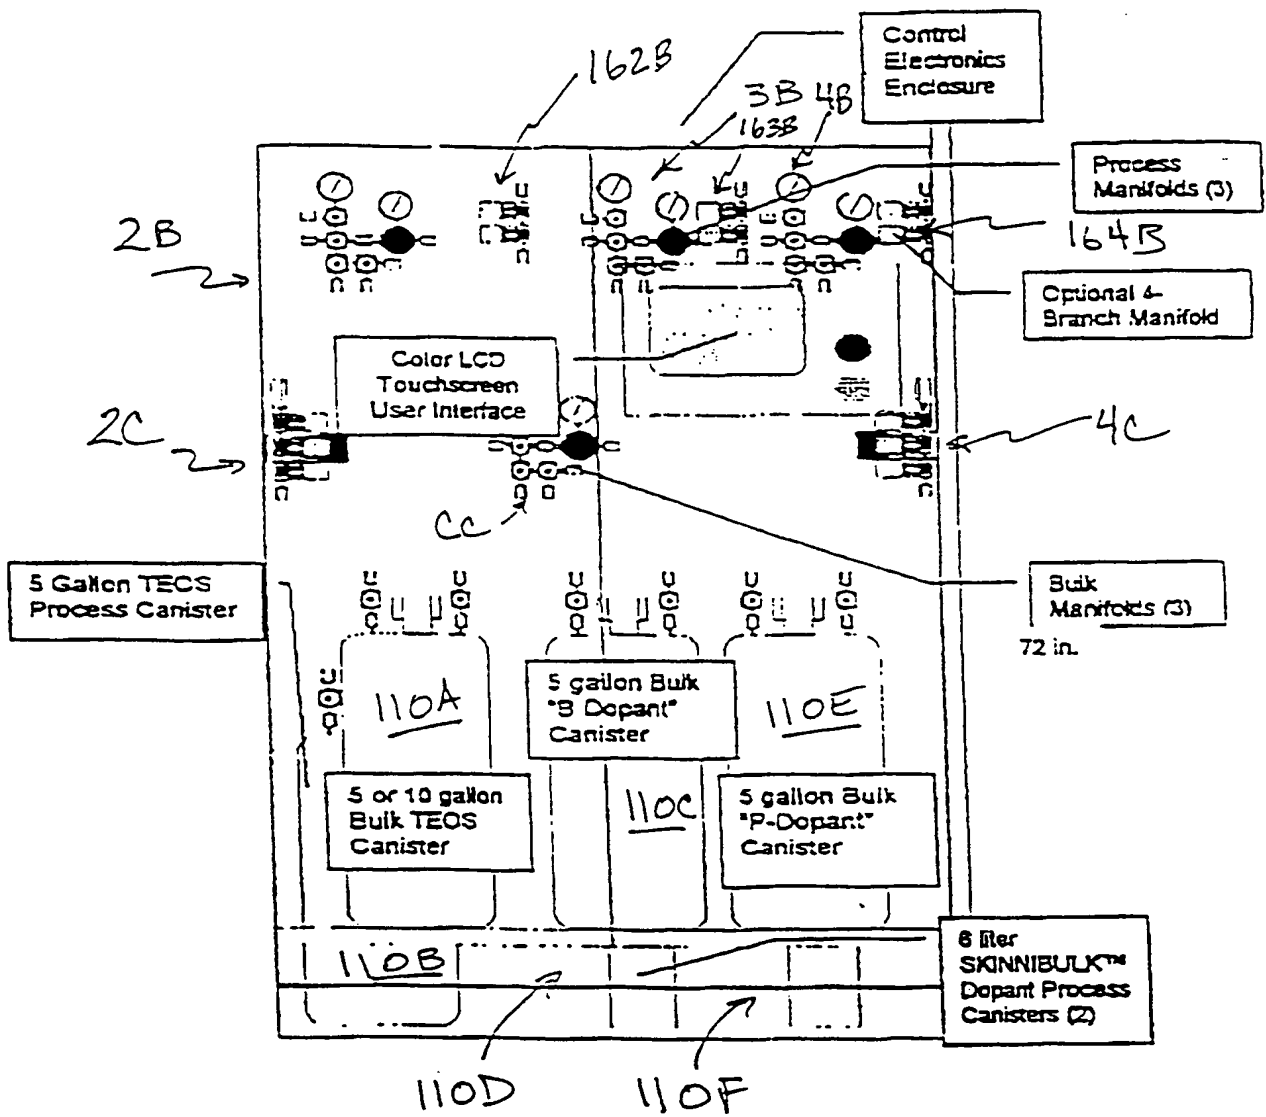


FIG. 10


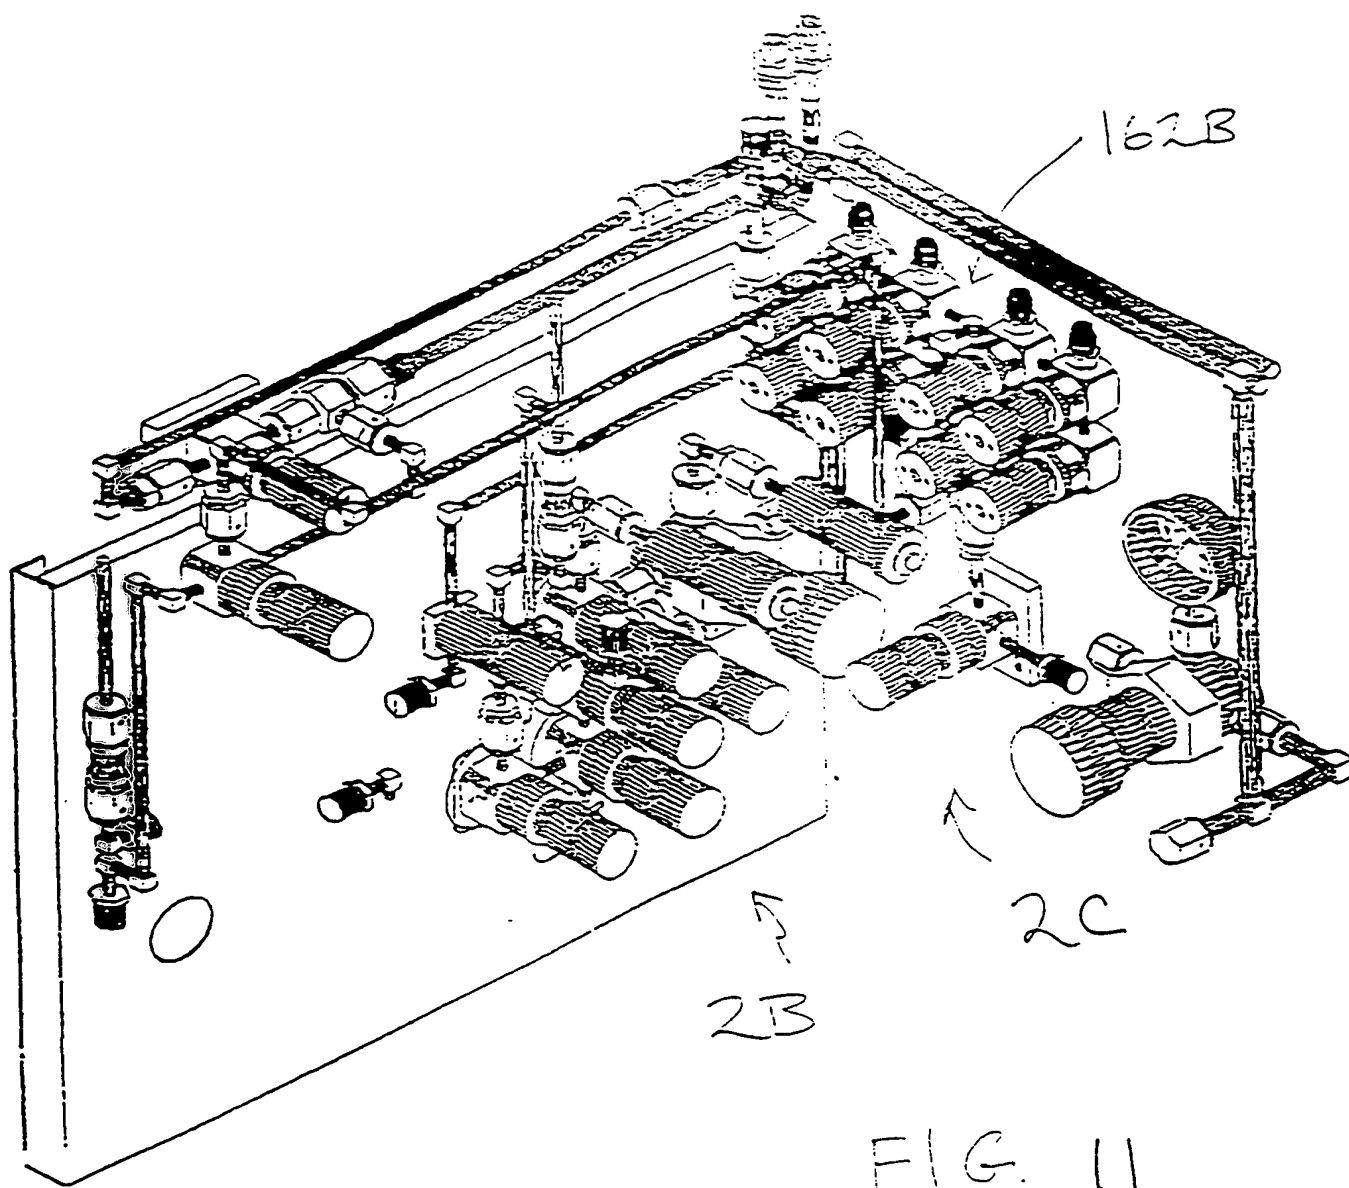


FIG. 11

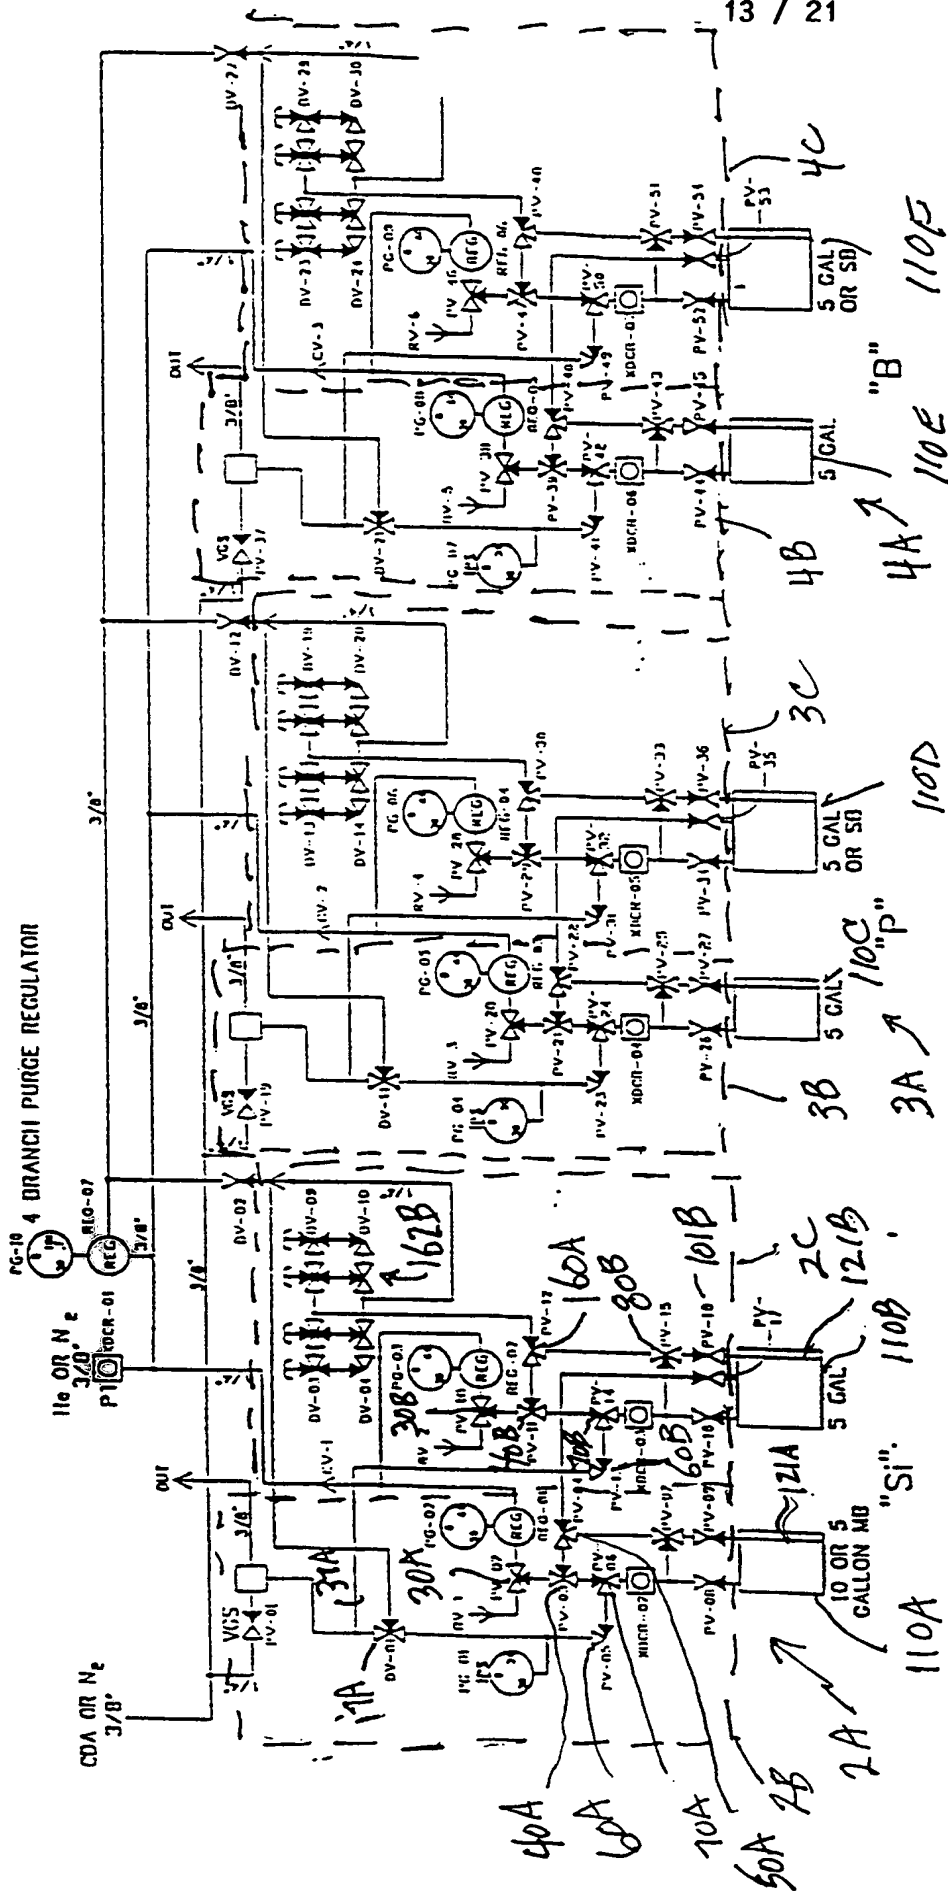

PV = PROCESS VALVES  
DV = DISTRIBUTION VALVES

FIG. 12

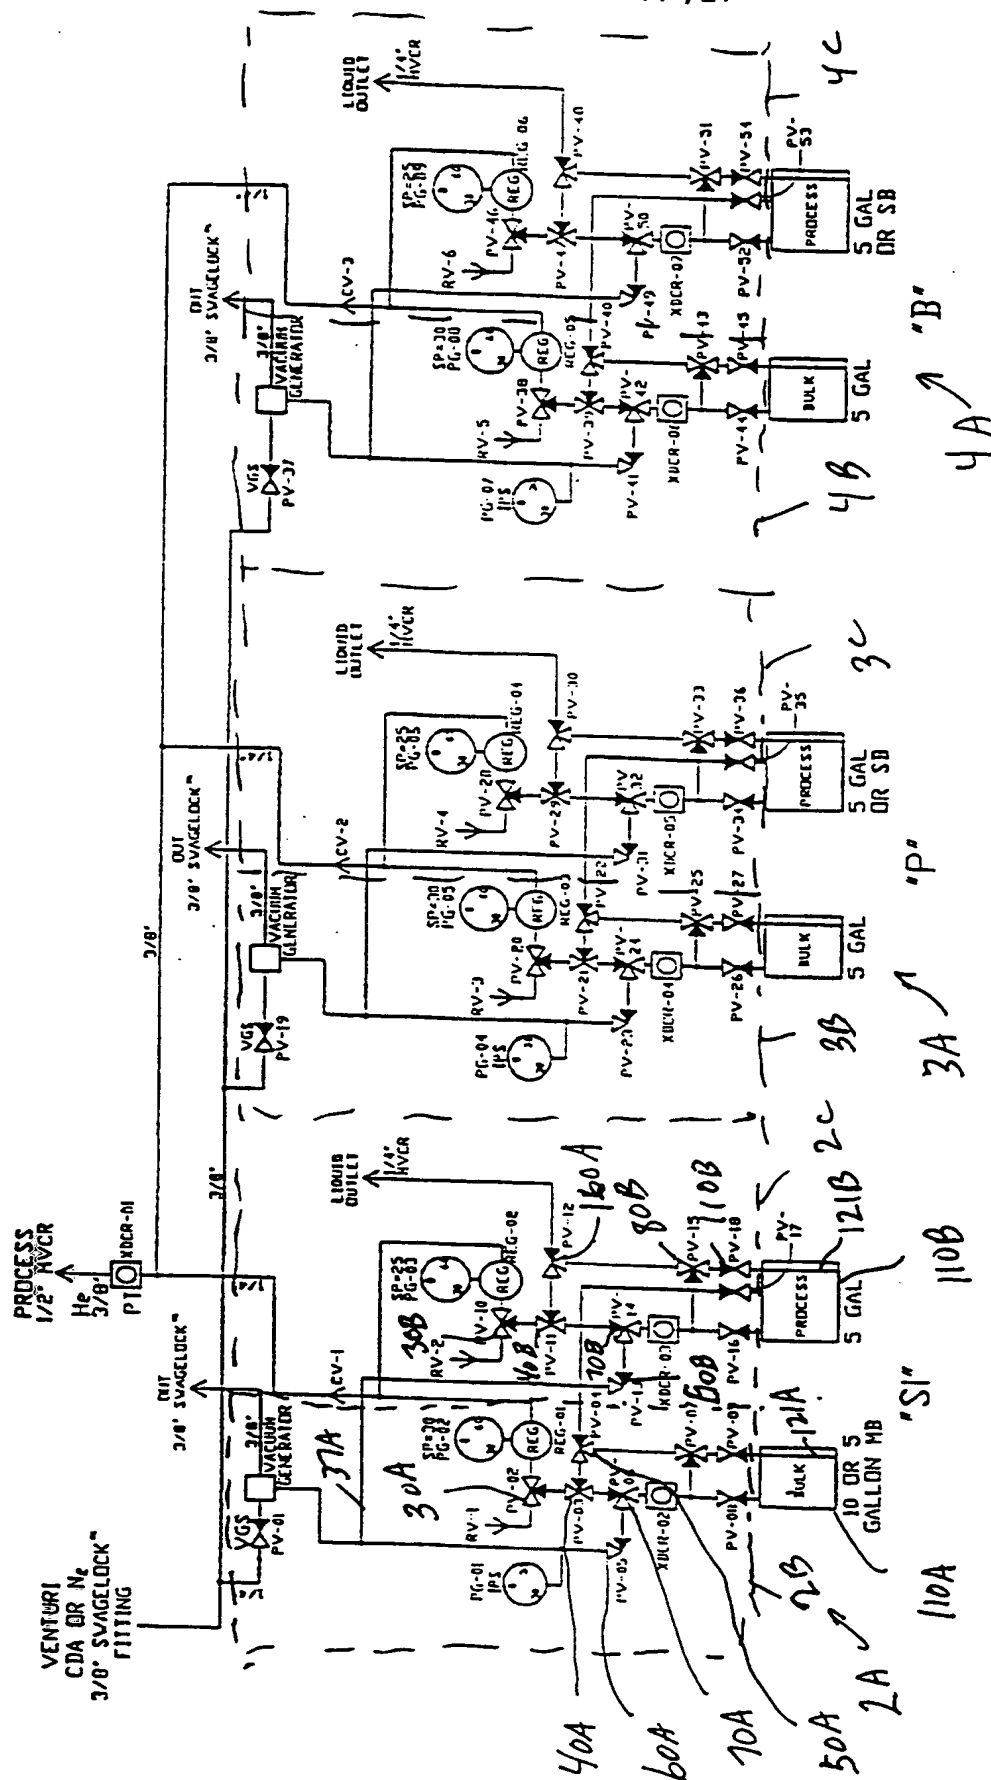


FIG. 12a


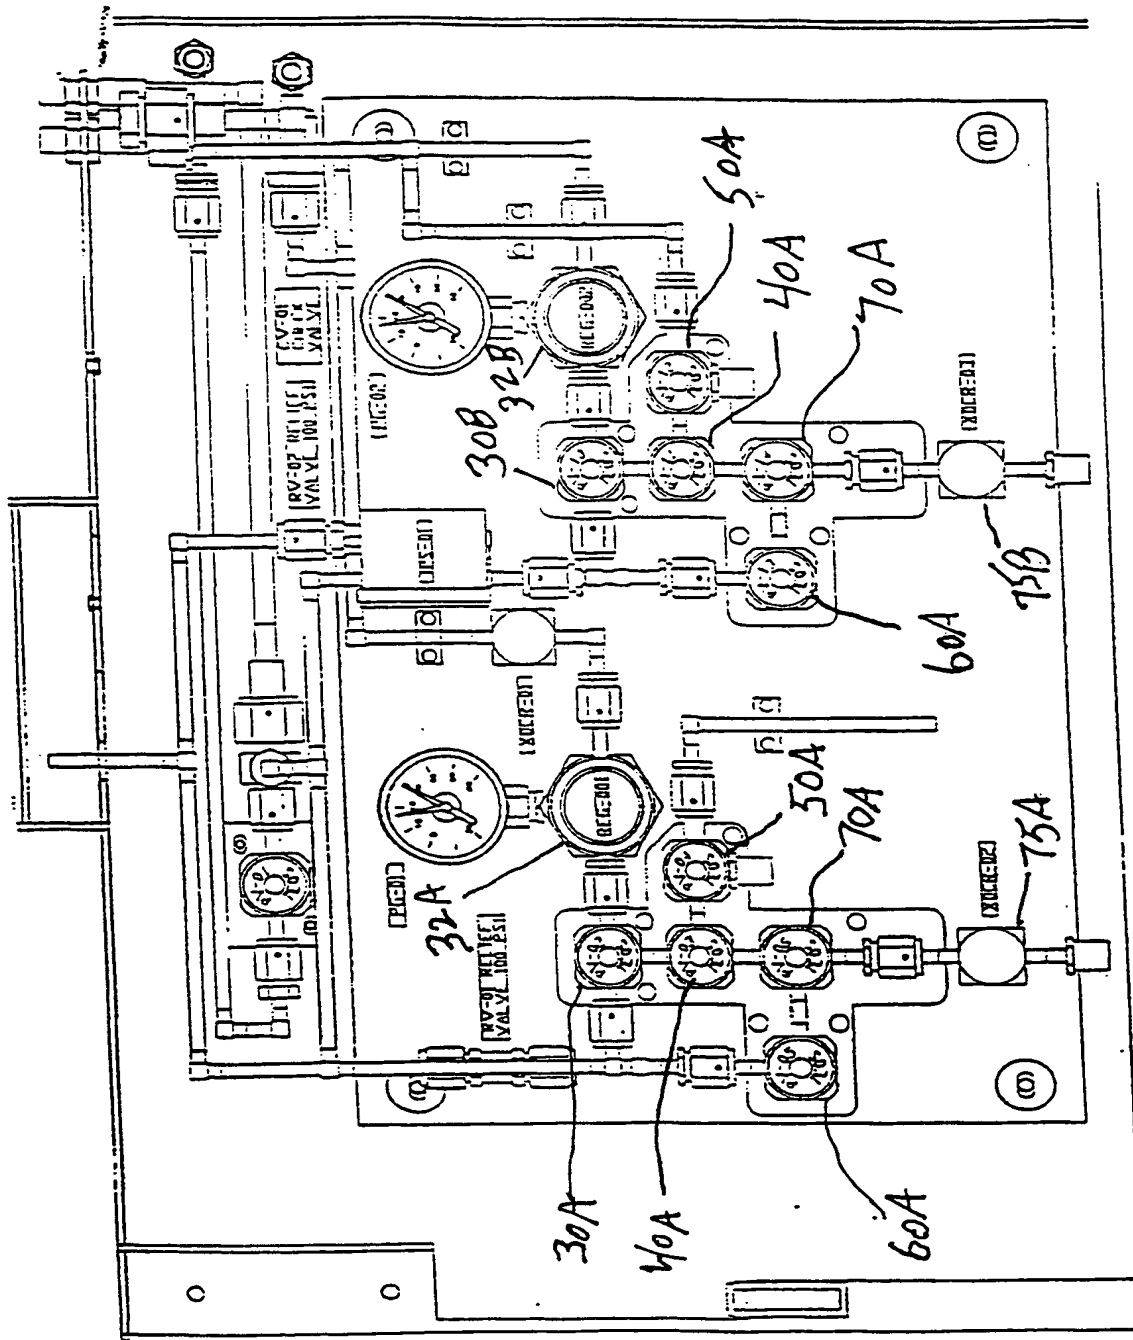


FIG. 13

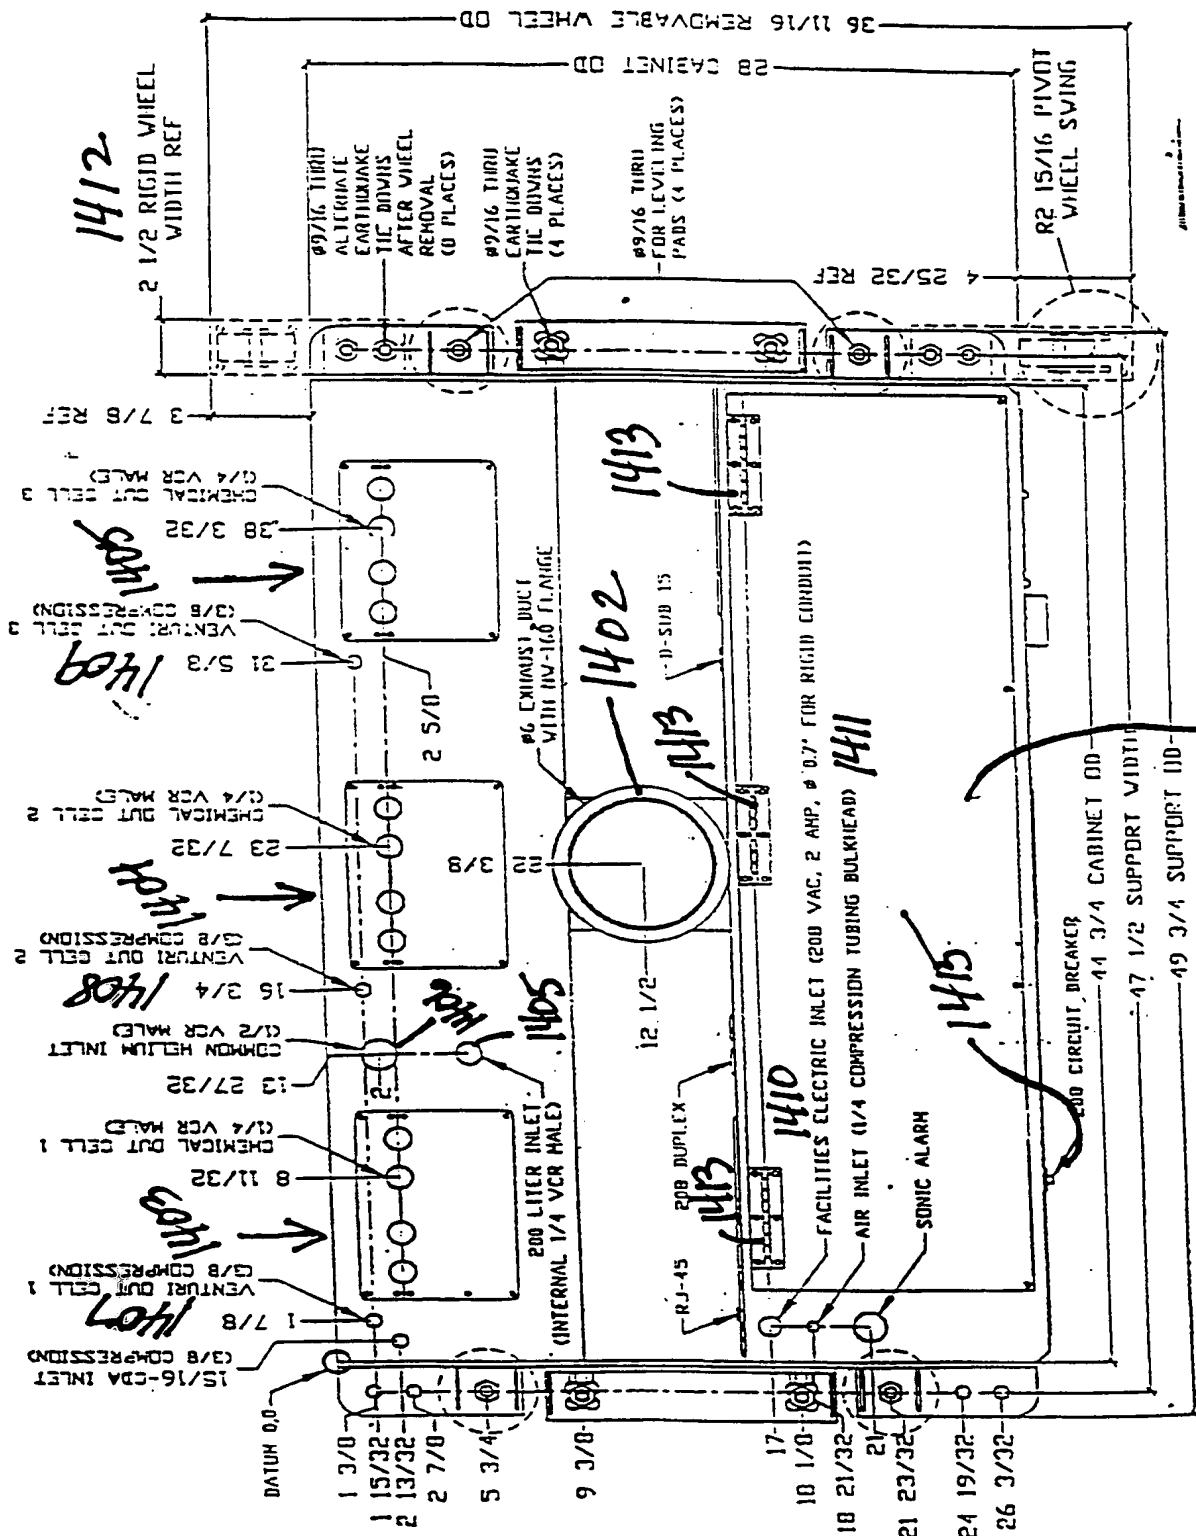

NOTES:  
1). WHEELS SHOWN HIDDEN ON RIGHTSIDE ONLY FOR CLARITY

**FIG. 14**

FIG. 14a

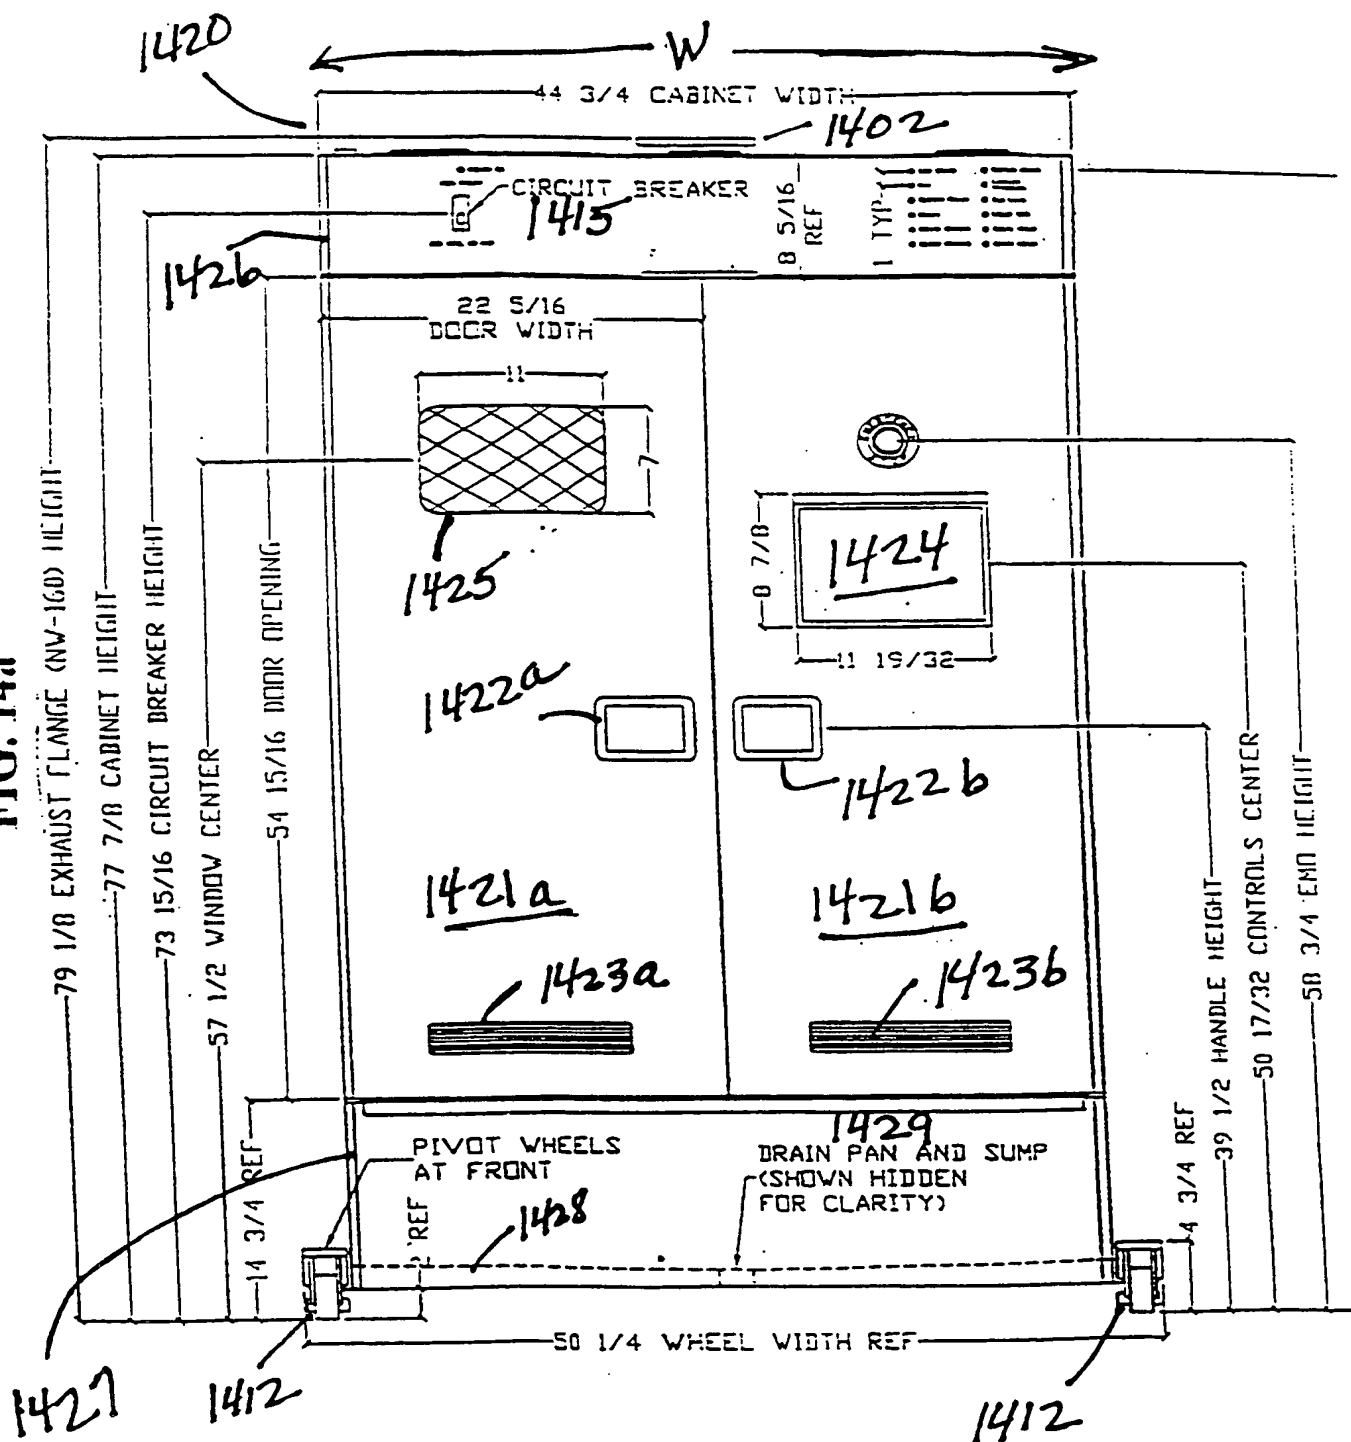
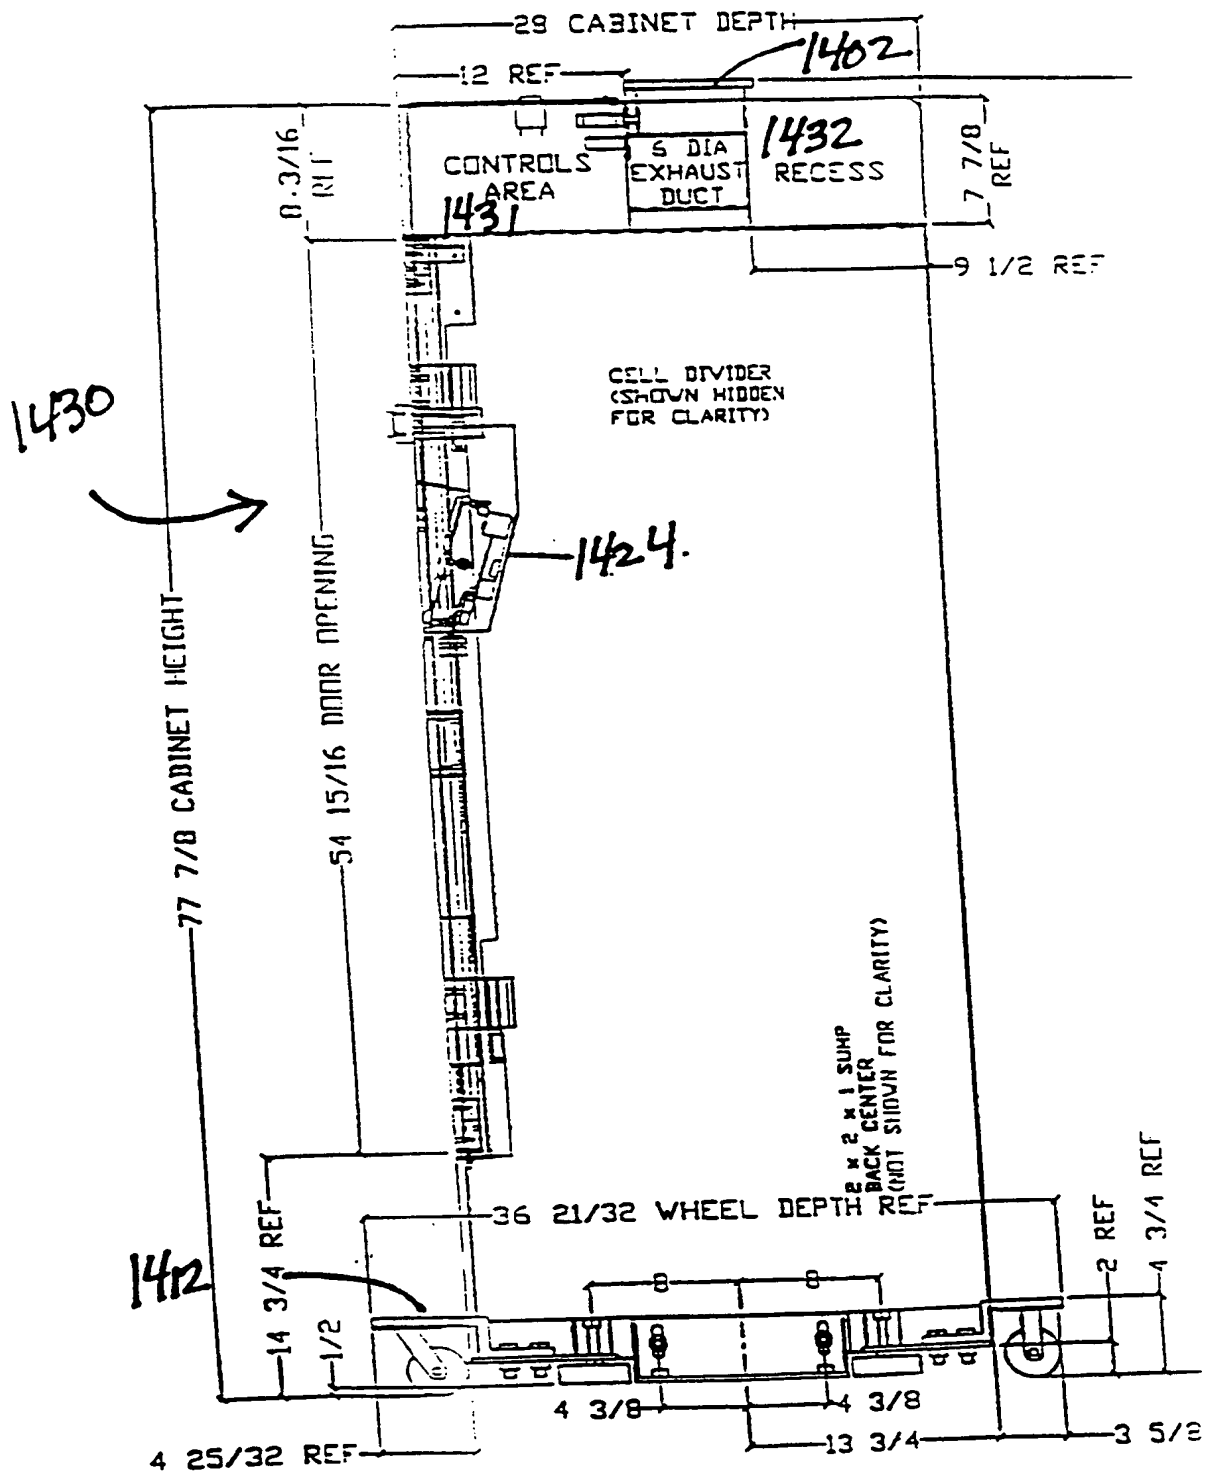




FIG. 14b



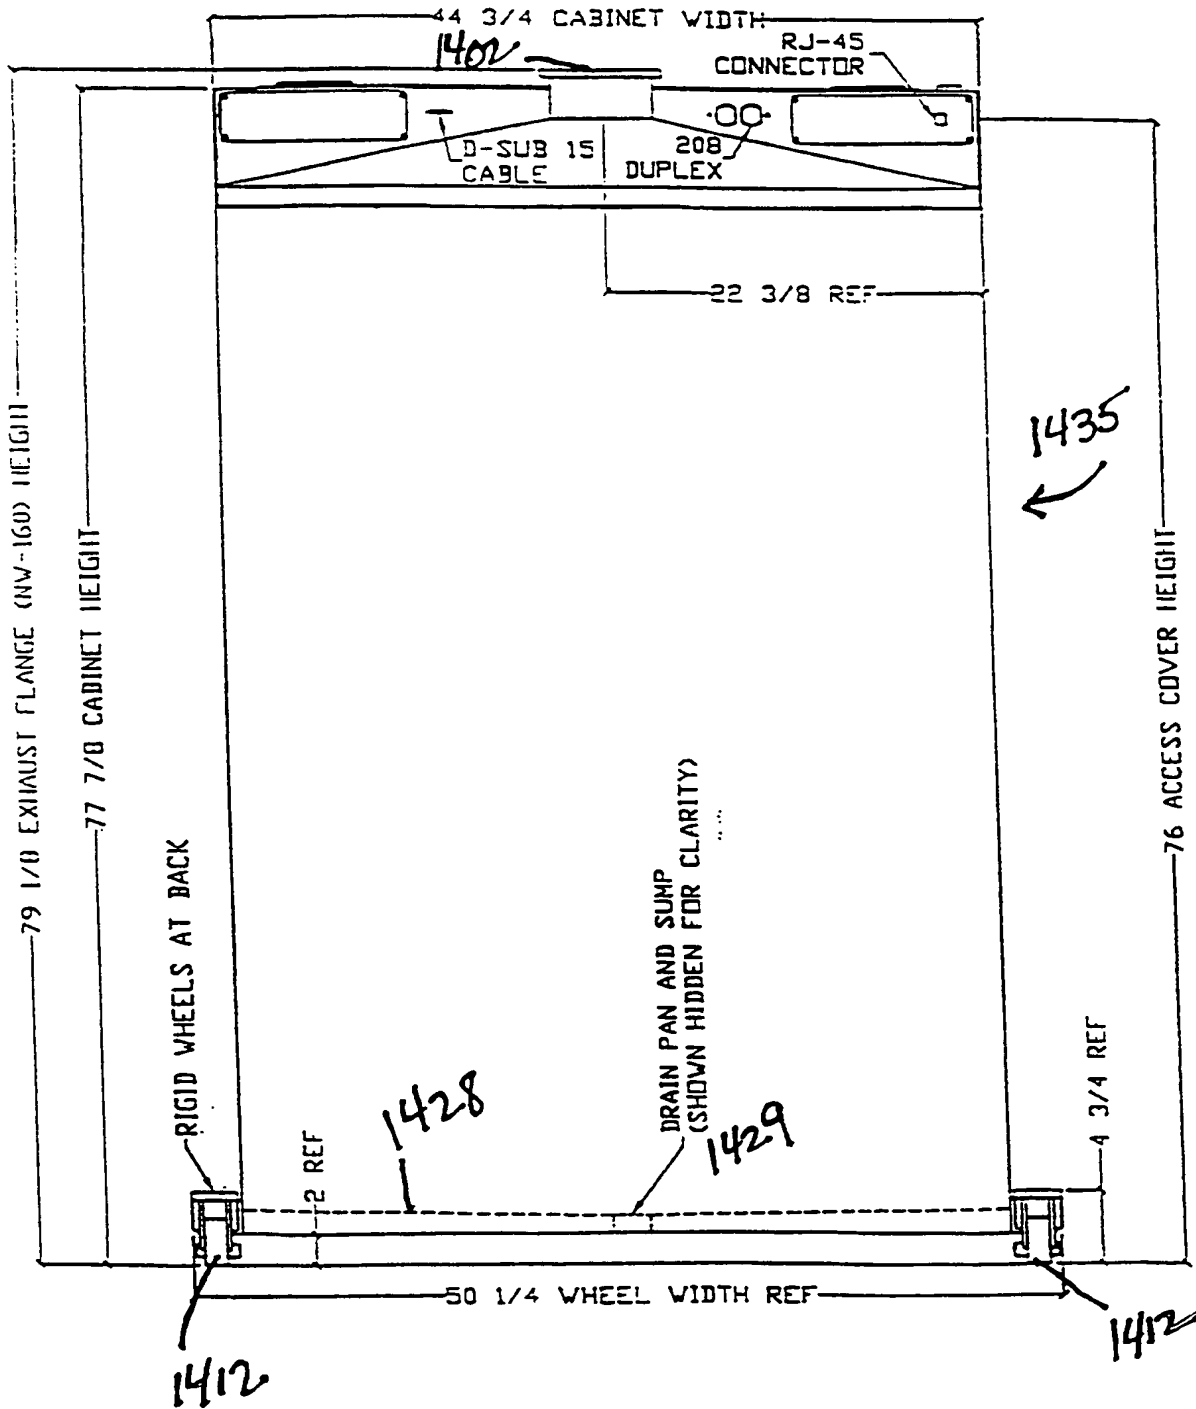


FIG. 14c

FIG. 14d

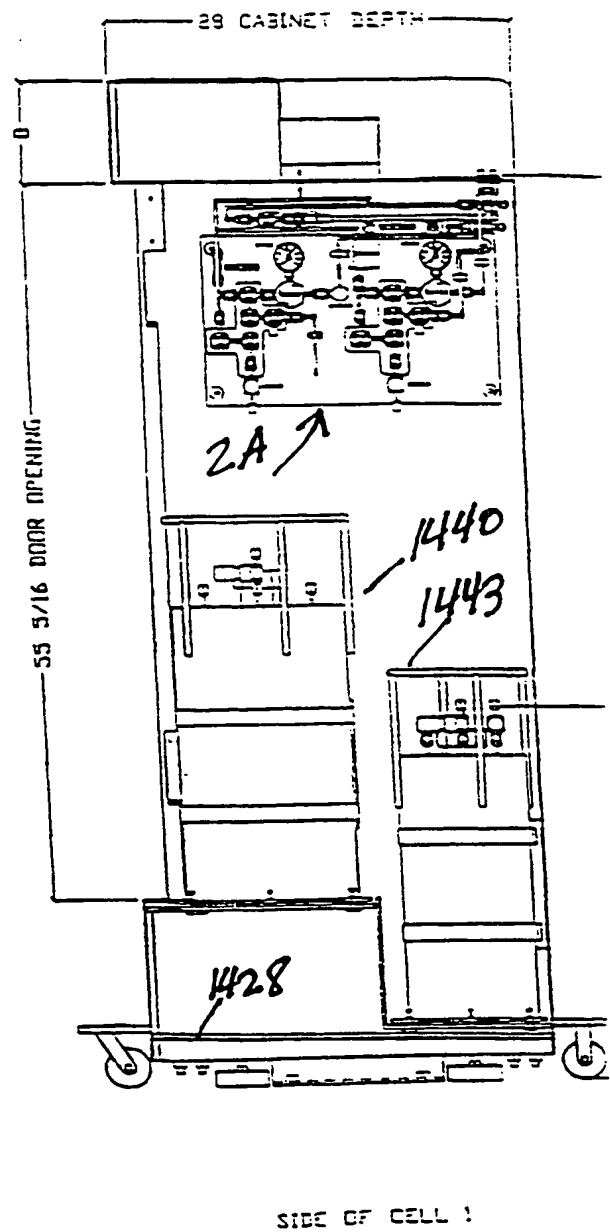
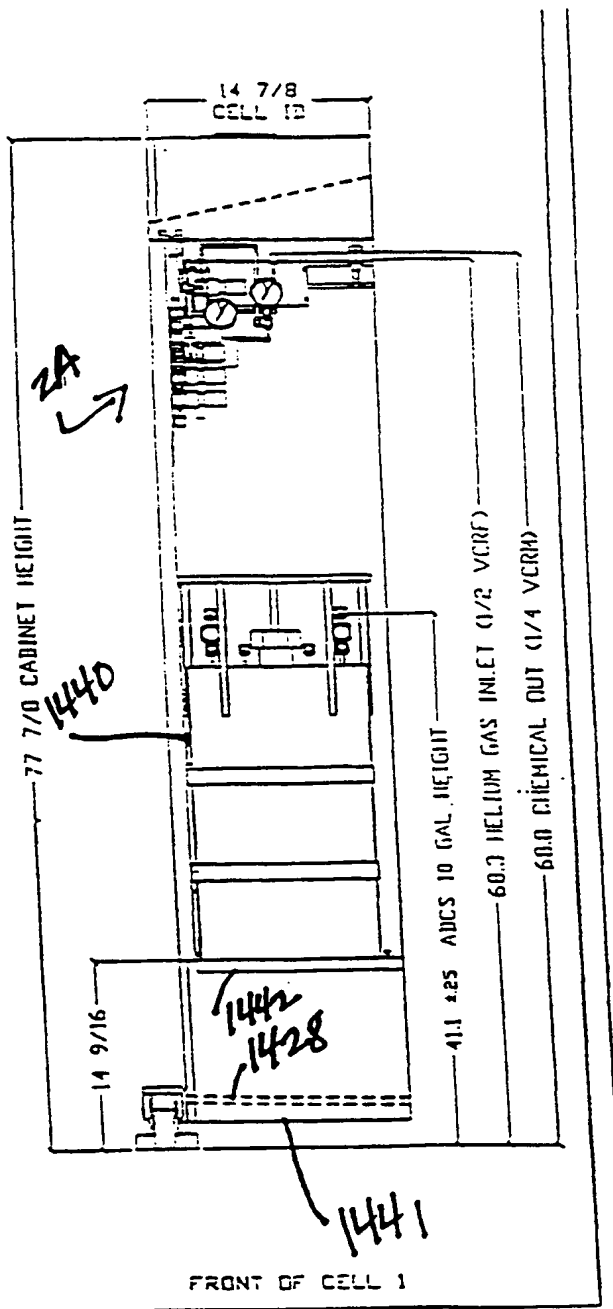


FIG. 14e

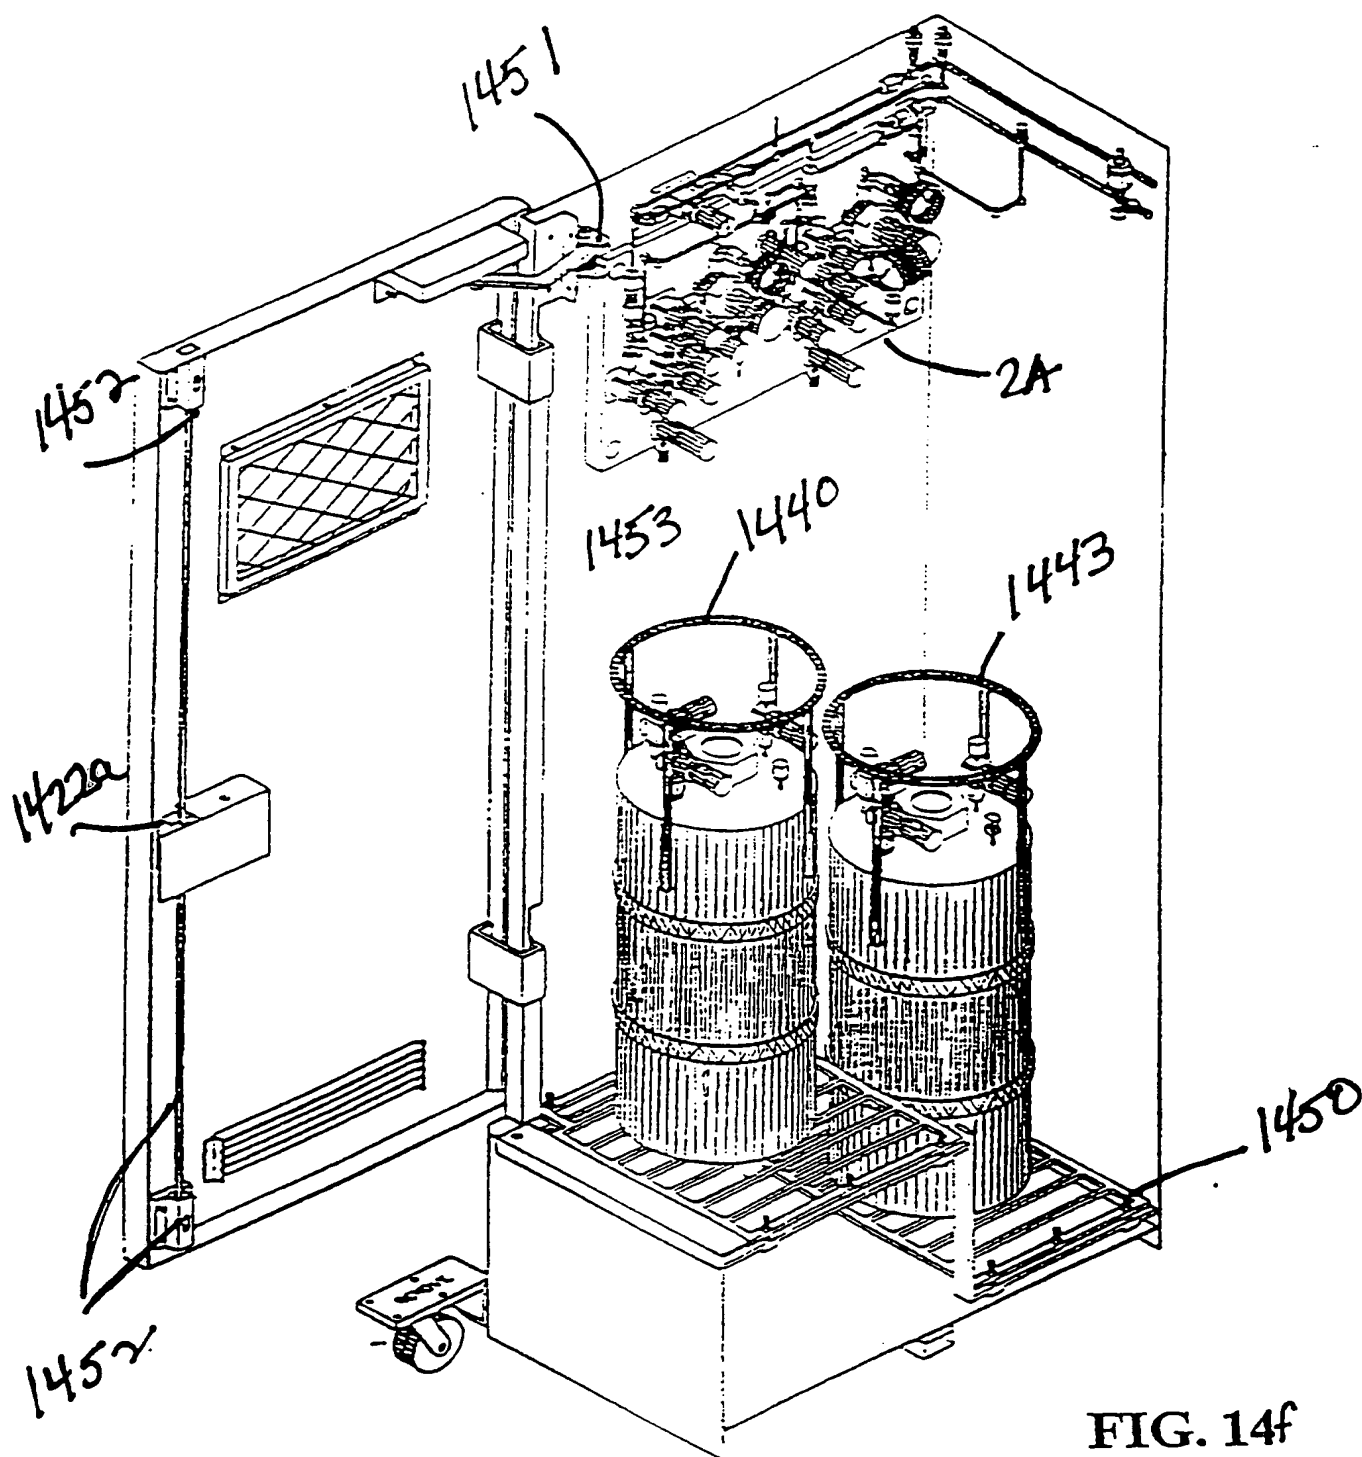


FIG. 14f

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/JS 99/14845

**A. CLASSIFICATION OF SUBJECT MATTER**  
 IPC 7 F17C13/04 F17C7/00

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
 IPC 7 F17C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 220 517 A (DUROSS RONALD R ET AL) 15 June 1993 (1993-06-15)	1-4, 7-11, 14-19, 22-24
Y	claims; figures 1,5,6,8	5,6,12, 13,20,21
Y	WO 95 20127 A (ADVANCED DELIVERY & CHEMICAL S) 27 July 1995 (1995-07-27) cited in the application claims; figure 37	5,6,12, 13,20,21
P, X	WO 99 02251 A (ESSER CRAIG ;GREGG JOHN N (US); NOAH CRAIG M (US); ADVANCED DELIVE) 21 January 1999 (1999-01-21) cited in the application page 9, line 26 -page 10, line 6; claims; figures	1-21

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance  
 "E" earlier document but published on or after the international filing date  
 "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)  
 "O" document referring to an oral disclosure, use, exhibition or other means  
 "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  
 "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone  
 "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.  
 "&" document member of the same patent family

Date of the actual completion of the international search

14 October 1999

Date of mailing of the international search report

22/10/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Meertens, J

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/14845

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5220517 A	15-06-1993	CA 2050247 A,C	01-03-1992
		CA 2165847 A,C	01-03-1992
		CA 2194855 A	01-03-1992
		US 5329463 A	12-07-1994
		US 5508947 A	16-04-1996
		US 5497316 A	05-03-1996
		US 5657254 A	12-08-1997
WO 9520127 A	27-07-1995	US 5607002 A	04-03-1997
		EP 0740757 A	06-11-1996
		JP 9508208 T	19-08-1997
		US 5590695 A	07-01-1997
		US 5562132 A	08-10-1996
		US 5711354 A	27-01-1998
		US 5878793 A	09-03-1999
WO 9902251 A	21-01-1999	AU 8481798 A	08-02-1999